


#01

POLYRACKTECH-GROUP


CompactPCI Plus I/O

// Product Information

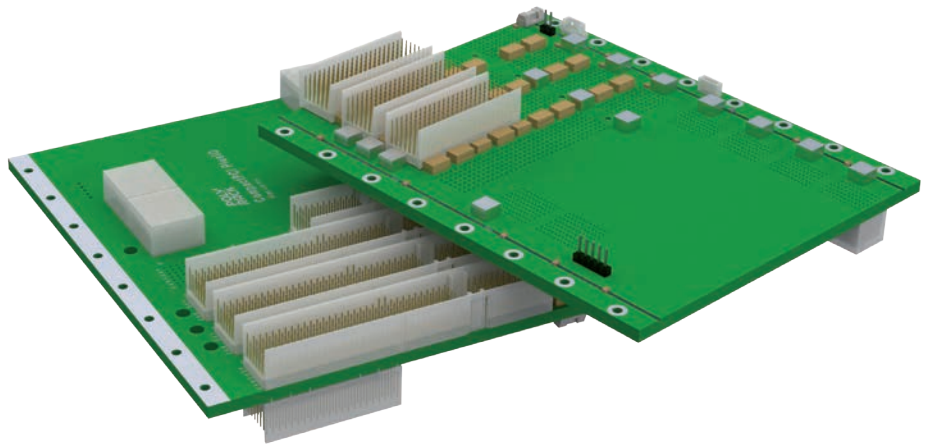

CompactPCI Plus I/O

// Product Information

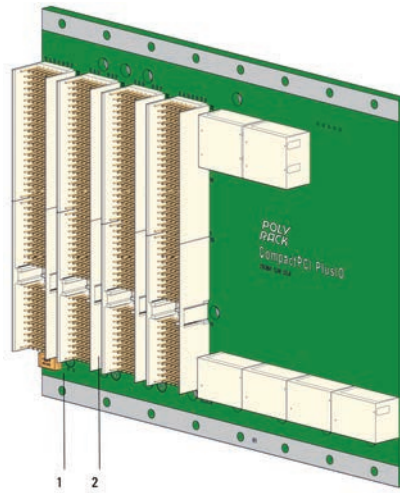


Configuration example

The diagram shows the configuration of CompactPCI Plus I/O 3 U

- 1 Printed circuit board
- 2 Connector
- 3 Power elements
- 4 Components


Surface finishing

PC board = immersion tin

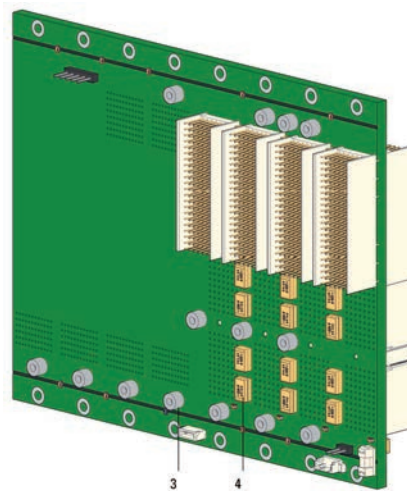

CompactPCI Plus I/O


// Produkt-Information

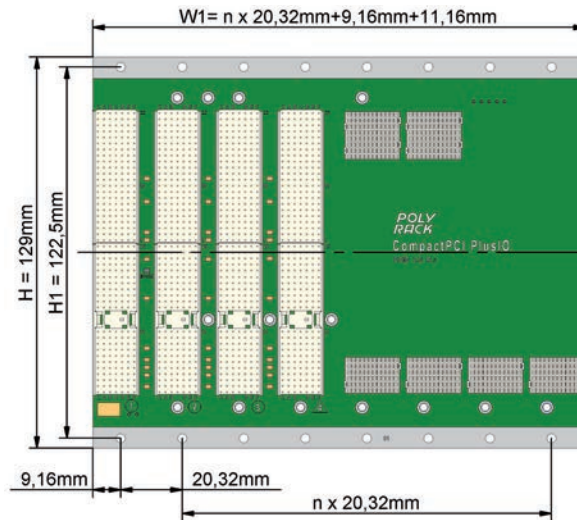

Dimension diagrams

CompactPCI Plus I/O 3 U Front view

W1 = total width
n = number of slots
PCB thickness = 4.40 mm

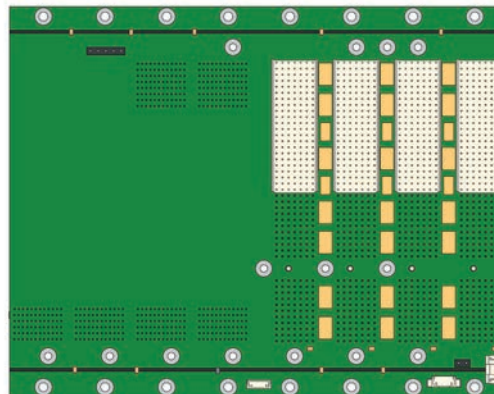


CompactPCI Plus I/O 3 U Rear view

CompactPCI Plus I/O

// Basic Units

Basic Units

The basic units differ with regard to the number of slots

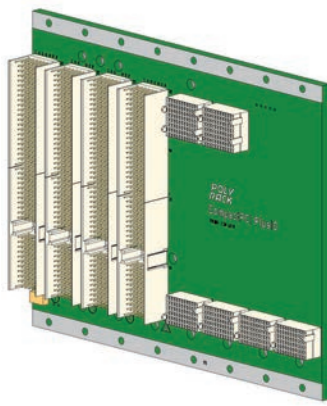

CompactPCI Plus I/O

Scope of delivery

Backplane, fully equipped
Terminal screws M4
for power input elements

Delivery form

In units for self-assembly

1 pc

Note

- Number of layers = 12
- Number and configuration of power elements on request
- Detailed data sheet available on request