


PVC CONVEYOR BELTING

BELT CONSTRUCTION

Conveying Side	Coating	PVC NR3 73 A		
	Thickness	1.50	mm	0.0591 in
	Color	Tan		
	Profile	Glossy		
Carcass	No. Plies	1		
	Weft	Flexible spun (PET)		
	Material	Spun polyester		
Pulley Side	Coating	PVC		
	Thickness	---	mm	---
	Profile	Brush		
	Color	Tan		

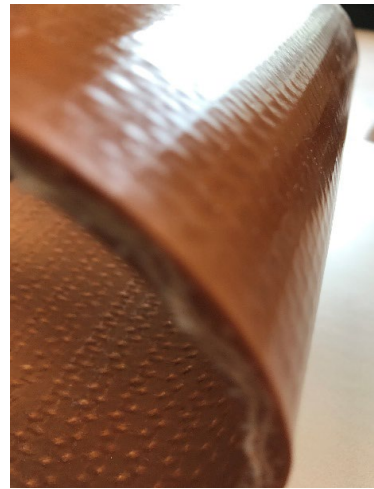

COMPLIANCES

REACH Compliant
FDA compliant

TECHNICAL SPECIFICATIONS

Overall gauge	5.20	mm	0.2047	in
Weight	6.3	kg/m ²	1.2903	lbs/ft ²
Elongation at 2%	35	N/mm	200	lbs/in
Temperature Range (continuous)	Minimum		Maximum	
	0	°F	180	°F
	-18	°C	82	°C
Minimum Pulley	Front Flex		Back Flex	
	4.0	in	6.0	in
	102	mm	152	mm
Coefficient of friction	Smooth Stainless		0.32	
	Hot Laminated		0.3	
Maximum width	1829	mm	72	in

RECOMMENDED ENDLESSING PROCEDURE

Type of splice	Technosplice®		
Finger length	80	mm	
Finger width	20	mm	
Upper platen	180	°C	
Lower platen	180	°C	
Dwell time	5	min	
Cool to	60	°C	
Pressure	2.0	Bar	
	Press assembly		
1	Top plate	All Splicing procedures developed on the	
2	PVC foil	Novitool® Aero®	
3	Technosplice	Splice Press	
4	Prepared belt		
5	Flexco® tape		
6	Silicon cloth		
7	Bottom platen		

ACCEPTABLE PROCESS LAYOUTS

Metal Detectors	Yes
Permanently Antistatic	No
Static conductive	No
Slider bed	Yes
Roller bed	Yes
Sliding on return side	No
Swan neck conveying	No
Accumulator conveying	Yes
Incline conveying	No
Troughed conveying	Yes
Curved conveying	No
Chemical Resistance	1

RECOMMENDED MECHANICAL FASTNER

Clipper® G Series™	
Alligator® Staple	RS187
Alligator®	25

SUITABLE APPLICATIONS

General conveying
Abrasive products
Easy to fabricate
Wet food conveying
Specially designed for walnuts

DISCLAIMER:

Uniband USA provides data and specifications, written and verbal, as a service to its customers as operating conditions and conveyor design vary, system to system, no representation or warranty is made or implied by Uniband USA that the representative data and specification provided herein are applicable to any individual system. Uniband USA does not assume any liability whatsoever in regard to its use. The buyer of the Uniband USA products should determine for itself the suitability of such products for the particular purpose of the buyer of the specific uses to which the product will be applied.