



## FITMENT INSTRUCTIONS

### ROOFTOP TENT: NYUMBA ON ROOF RACK

#### TOOLS REQUIRED:

- 13mm Spanner

#### TO FIT

*Please use the images with the steps as a reference to help you with the fitment.*

**1.** Open the Nyumba box carefully to unwrap. Make sure not to cut the aluminium box of the Nyumba while unwrapping.

**2.** Unclip the tent latches on both sides of the Nyumba and place the tent on stillages.

- 1 x Telescopic ladder (fixed within the tent)
- 1 x Mounting bracket set (4 x Load bar Mounting Brackets)



#### For a Front-Runner roof rack, you need 4 x Load bar Mounting Brackets:




**3.** Using the 4x (four) Load Bar Mounting brackets, remove the 2x (two) hex bolts from the bottom of the bracket. Slide the 2x (two) hex heads into the load bar on the roof rack.



**4.** Place the Load Bar Mounting brackets onto the bolts and loosely tighten. (Repeat with the 3 remaining brackets)

**5.** Move the brackets on the roof rack's load bar to line up with the tent load bars.




**6. Prepare the tent:** Remove the hex bolt from the top of the Load Bar Mounting Brackets. Slide it into the center slot of the load bar underneath the Nyumba (2x (two) Hex heads in each load bar).

**7.** Hoist the tent up onto the mounting surface.

**8.** Make sure the bolts in the Load bars, on the Nyumba, align with the holes in the **Load Bar Mounting Bracket**, fitted on the roof rack.

**9.** If all the bolts are aligned, lower the tent onto the Load bar Mounting Bracket, move the tent into place and tighten all bolts and nuts.

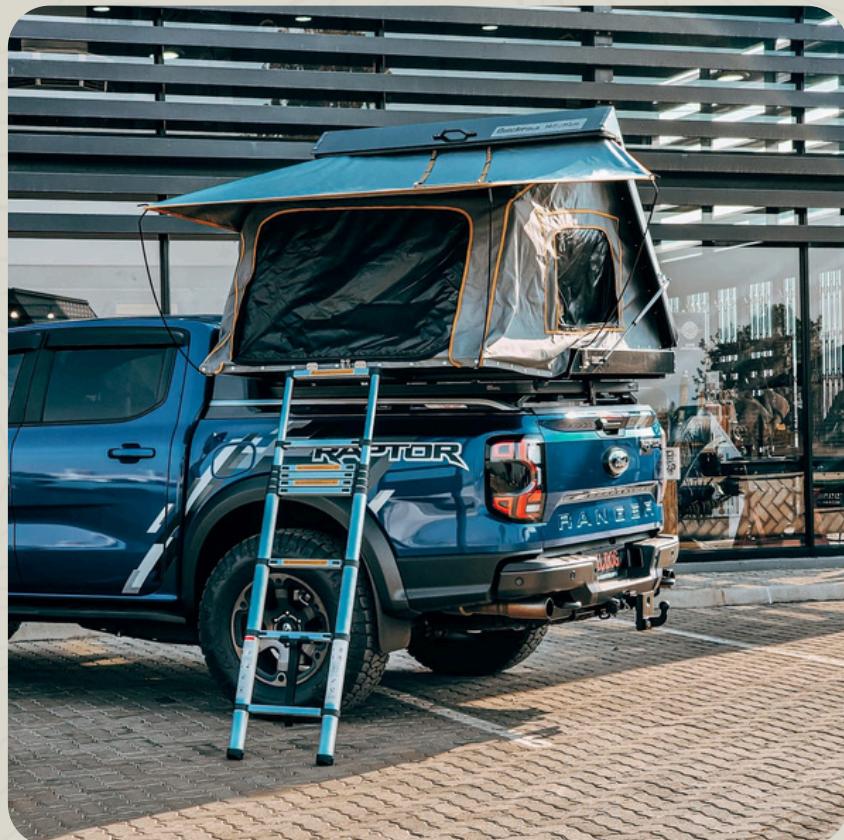

PLEASE DON'T HESITATE TO CONTACT US IF YOU NEED ANY SUPPORT REGARDING THE FITMENT.  
THANK YOU FOR YOUR SUPPORT, WE HOPE YOU LOVE YOUR QUICK PITCH PRODUCT.