inepro®

Current Transformer

PRO24 & PRO36 Split core



5 YEAR WARRANTY

Specifications

- Output (secundairy current): 5A
- DC resistance: 100 mΩ
- Hi-Pot: 2000V/1mA/5sec
- Insulation Resistance: 100MΩ min
- Accuracy grade: See table
- Frequency: 50/60Hz
- Cable split: 2,5mm²/14AWG
- Operating temperature range: -40°C ... 85°C
- Operating temperature range: -25°C ... 85°C
- Flame retardant: UL94-V0


Connection


K(on CT) = IN
L (on CT)= OUT



Connect the CT to L1 (red on L1 IN and black on L1 OUT)

Dimensions

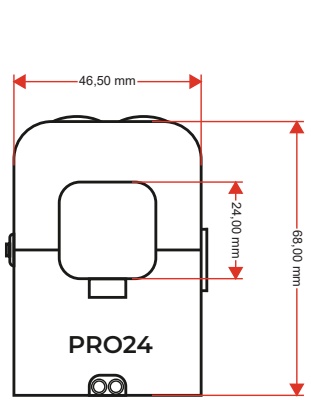

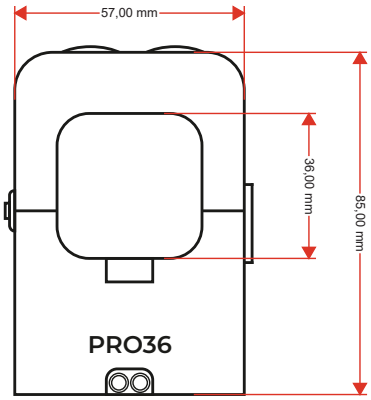

Article number	Model	Class
7010	PRO24 5/100	3
7019	PRO24 5/150	3
7012	PRO24 5/200	1
7013	PRO24 5/250	1
7014	PRO24 5/300	1
7015	PRO36 5/250	1
7016	PRO36 5/300	1
7017	PRO36 5/400	0.5
7018	PRO36 5/600	0.5