TekLaser™

QTekLaser™ 553 – 628 nm Fiber Laser

Product Description



The QTekLaser™ 553 – 628 nm Fiber Laser class combines second-harmonic generation (SHG) and sum-frequency generation (SFG) to deliver stable, single-frequency, polarization-maintaining light up to 6 W. Beam quality is < 1.1 and relative intensity noise stays below -125 dBc/Hz above 10 kHz. An IoT-enabled interface and 19" rack-mount chassis make it straightforward to integrate into quantum and precision-spectroscopy systems.

Up to 6 W Power | <10 kHz Linewidth | <-125 dBc/Hz Relative Intensity Noise (RIN)

Features

- High output power up to 6 W
- High reliability
- Excellent power stability (<1%)
- User-friendly interface via IoT technology
- 4U 19" Rack mount
- Certified to IEC 60825-1:2014 safety standards

Applications

- Quantum computing
- Atomic and molecular physics
- Precision spectroscopy
- Laser-based metrology
- Nonlinear optics and frequency conversion
- Research

Second-Harmonic and Sum-Frequency Generation

The wavelength range of QTekLaser™ products can be further extended using the nonlinear processes of second-harmonic generation (SHG) and sum-frequency generation (SFG). The SFG architecture is illustrated in figure 1. The extended wavelength values are summarized in the blue-shaded cells of table 1. This method achieves high power at wavelengths no fiber gain medium reaches directly.

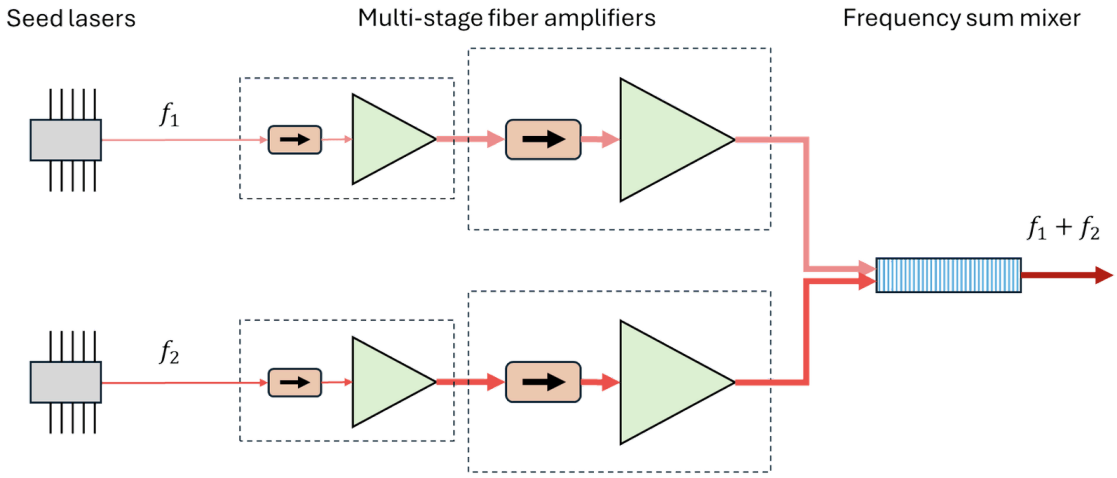


Figure 1. QTekLaser™ sum-frequency generation (SFG) fiber laser system. The frequency sum mixer is integrated into the product.

QTEK LASER, LLC
411 Waverley Oaks Road, Suite 111, Waltham, MA 02452 USA
+1 781-373-1446 | sales@qteklaser.com | www.qteklaser.com

	SF-AMP-Yb² (506 – 556 nm)	SF-AMP-Tm² (865 – 1030 nm)	SF-AMP-Yb (1012 – 1112 nm)	SF-AMP-Er (1530 – 1610 nm)	SF-AMP-Tm (1730 – 2060 nm)
SF-AMP-Yb² (506 – 556 nm)	253 – 278 nm				
SF-AMP-Tm² (865 – 1030 nm)	319 – 361 nm	432 – 515 nm			
SF-AMP-Yb (1012 – 1112 nm)	304 – 371 nm	466 – 535 nm	506 – 556 nm		
SF-AMP-Er (1530 – 1610 nm)	380 – 413 nm	553 – 628 nm	609 – 658 nm	765 – 805 nm	
SF-AMP-Tm (1730 – 2060 nm)	391 – 438 nm	576 – 687 nm	638 – 722 nm	812 – 904 nm	865 – 1030 nm

Table 1. Wavelength extension of QTekLaser™ products via nonlinear frequency conversion. Yb² and Tm² denote frequency-doubled Yb and Tm amplifiers. Red: harmonic generation (SHG, or FHG via two cascaded SHG stages). Blue: sum-frequency generation (SFG), including cascaded SHG+SFG.

Quantum Applications

The 553 – 628 nm system delivers 6 W of single-frequency orange-red light for quantum computing and atomic physics. Its output can then be frequency-doubled to 277 – 314 nm.

Safety & Retro-Reflection Advisory



QTekLaser™ lasers comply with Federal Regulations (21 CFR Subchapter J, Part 1040) as administered by the Center for Devices and Radiological Health and are certified to IEC 60825-1:2014 standards.

It is the end user's responsibility to ensure that no significant light is retroreflected back into QTekLaser™ systems as this can degrade performance and potentially damage the lasers. To prevent this, the use of an external optical isolator is strongly recommended. Damage due to retroreflected light is not covered under warranty.

Ordering Information

Part Number: QT-LASR-SHG-SFG-(553 – 628)-6-W-2-2.0-2
Laser Type: Seed + Er-doped fiber amplifier + Tm-doped fiber amplifier + SHG + SFG

Specifications

Category	Parameter	Value	Unit
Laser	Wavelength	553 – 628	nm
	Operation mode	CW	/
	Max output power	6	W
	Linewidth	<20	kHz
	Output $1/e^2$ beam diameter	1.3	mm
	Beam quality (M^2)	<1.1	/
	Relative intensity noise (RIN) for freq. >10 kHz	<-125	dBc/Hz
	Fiber length to chassis	2	m
	Polarization direction	Vertical	/
	Polarization extinction ratio (PER)	>20	dB
	Optical signal-to-noise ratio (OSNR)	58	dB
Electrical	Fuse	6.3 A, 250 VAC, 5×20 mm	/
	Remote interlock voltage	3.3	V
	Max power consumption	490	W
	AC power supply voltage	110	V
General	Warm-up time	30	min
	Cooling	Chilled water	/
	Suggested chiller temperature	19.5	℃
	Chilled water flow rate	≥0.65	GPM
	Room temperature	17 – 25	℃
	Room humidity	30 – 60	%
	Weight	66 (145)	kg (lbs)

Performance

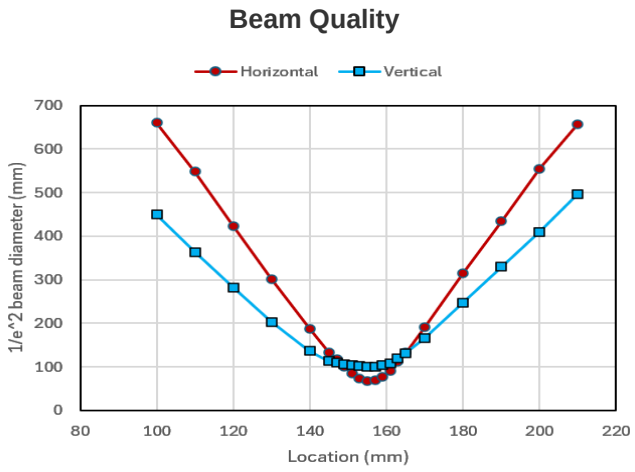


Figure 2. Beam quality: $M^2 = 1.01 \pm 0.03$.

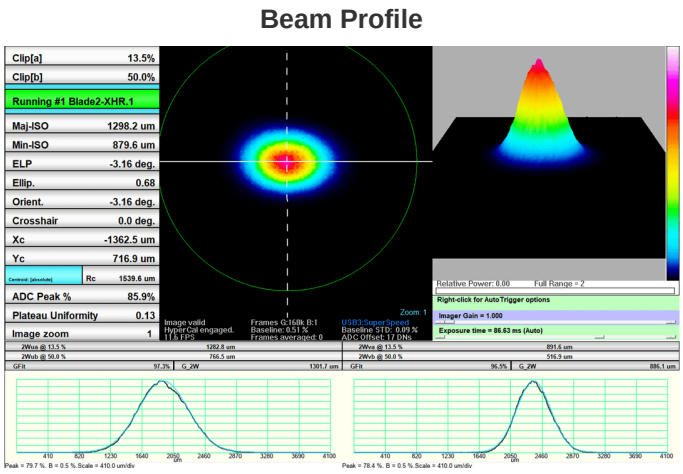


Figure 3. Beam profile. $1/e^2$ beam diameter 1.3 mm horizontally and 0.9 mm vertically.

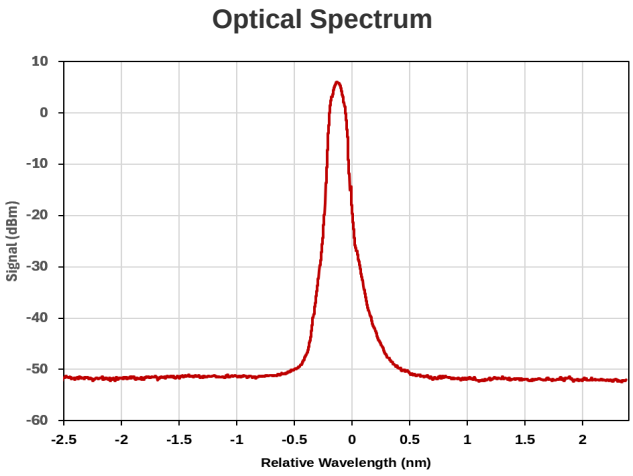


Figure 4. Optical spectrum at 6 W, measured with an Anritsu MS9710B optical spectrum analyzer at 0.001 nm resolution. The optical signal-to-noise ratio (OSNR) is 58 dB.

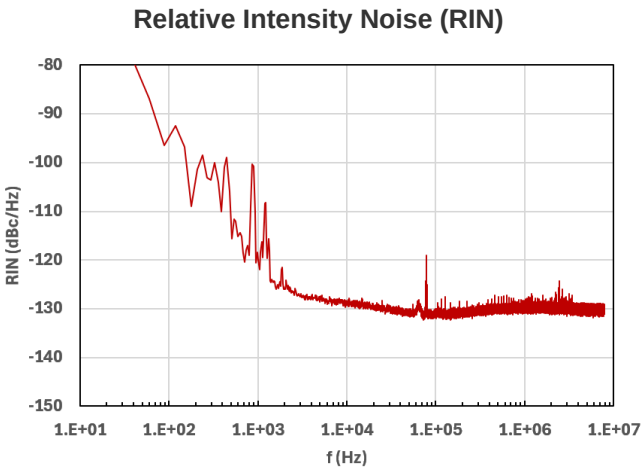


Figure 5. Relative intensity noise (RIN) < -125 dBc/Hz for frequencies >10 kHz.

Mechanical Dimensions

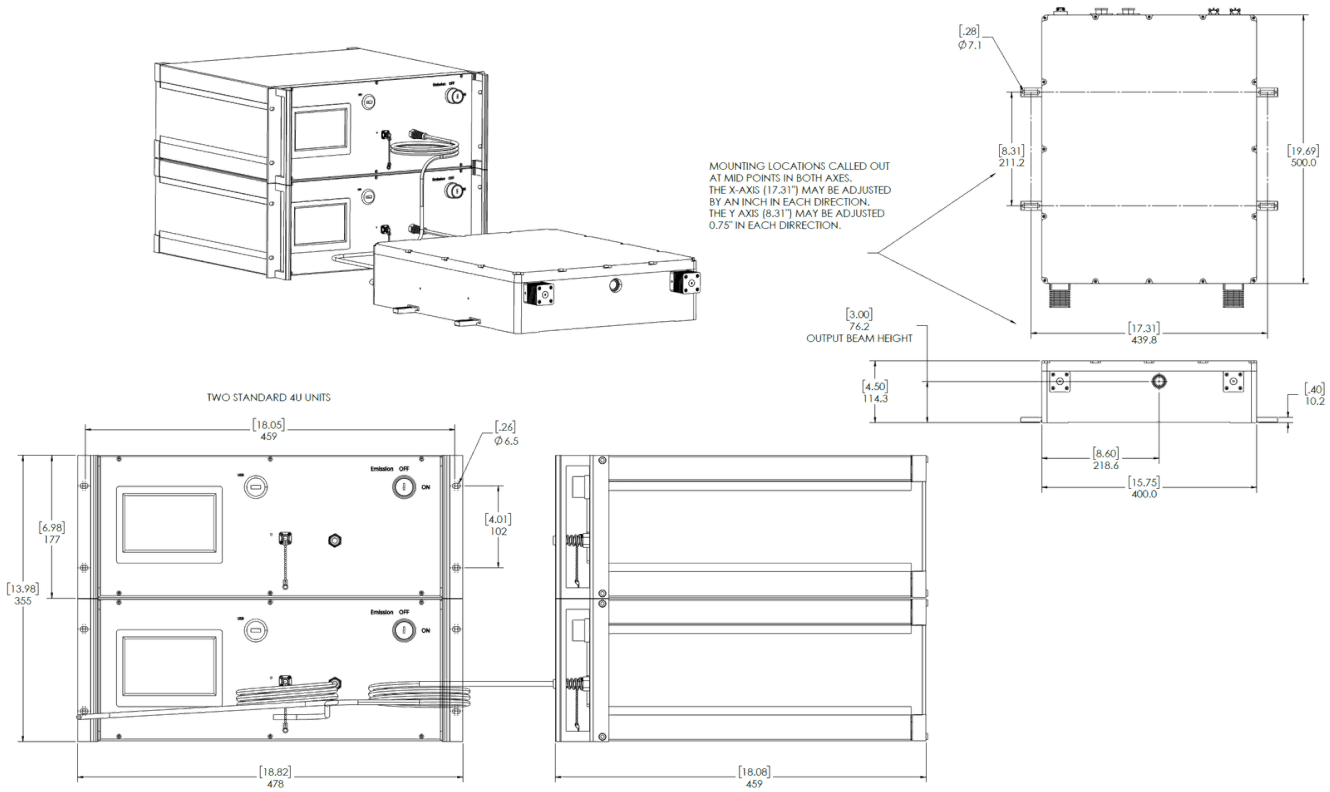


Figure 6. 553 – 628 nm fiber laser mechanical dimensions.

Product Images

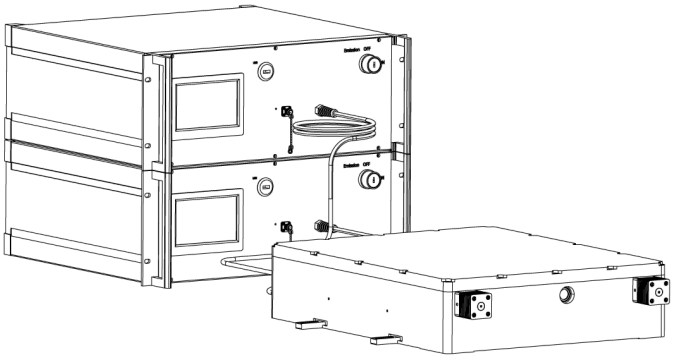


Figure 7. 553 – 628 nm fiber laser, 2×4U chassis + laser head, water cooled.



Figure 8. QTekLaser fiber laser, 4U chassis back panel, water cooled.