



INDU-ELECTRIC

Power Distribution



Indoor & Outdoor Events



TV - Studio



Motion Picture



Industrial



Touring

INDU-ELECTRIC

a new Generation of Power Distribution Equipment



INDU-ELECTRIC
North America

Versatility Without Limits

INDU-ELECTRIC Around the World • California • New York • Germany
www.indu-electric.com

INDU-ELECTRIC North America Inc. • 24856 Avenue Rockefeller • Valencia, CA 91355
Phone: 310-578-2144 • Fax: 818-688-3924
usa@indu-electric.com



Indoor & Outdoor Events



Motion Picture & Broadcast



Conventions



Industrial



Touring



INDU-ELECTRIC Power Where You Need It!



Custom Configurations Quotes Next Business Day - Call us today!

www.indu-electric.com



	The Cube® Series	3
	Armor-Tech Series	10
	Suitcase Series	12
	Lunch Box Series	13
	Floor Boxes	14
	Wall Mounting / Company Switch Series	15
	Tourpack Series	16
	Roadpack Series	17
	Transformer Series	17
	Carnival & Special Events Series	18
	DMX Series	19
	Custom Cable Assemblies	20

INDU-ELECTRIC Proudly Presents the CUBE® Series - Our most Compact line of Non-Conductive Power Distribution Boxes

The CUBE® - Covered by US Patents # 7848085 / # D656,099S



We are proud to offer an extensive and innovative product line representing state of the art in power distribution equipment. Multiple configurations such as Cam, Pin & Sleeve, 19 Pin, Straight Blade, Twistlock and GFCI are available in standard or custom configurations. Our enclosures are non-conductive, UL 94 V0 rated and virtually indestructible.

Custom Laser Engraved Logos Available



Outdoor Series



Spider Series



Pin & Sleeve



RV Series



Stage Pin Series



Twistlock Series



Edison Series



Basecamp Series



001 Cube®

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	12- 20A 120V Duplex Outlets
Protected By	12- 20A 1P Rocker Breaker
Model-Nr.	CB1-5WPT-12X520
Dimensions	15"L x 10"W x 8,25"H



Side View



Recessed Cam Input



Pass Through

Also available as 15 Way or 18 Way Version

Input Device	80A 3Ø Locking Cam
Output Device	12- 20A 120V Duplex Outlets
Protected By	12- 20A 1P Rocker Breaker
Model-Nr.	CB4-5W-12X520
Dimensions	10"L x 10"W x 8.25"H

002 Cube®



Recessed Cam Input



Side View

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	24- 20A 120V Duplex Outlets
Protected By	24- 20A 1P Rocker Breaker
Model-Nr.	CB2-5WPT-24X520
Dimensions	15"L x 10"W x 10.75"H

003 Cube®



Input Device	180A 3Ø Locking Cam
Output Device	6- 30A 120/208V L21-30
Protected By	6- 30A 3P Breaker
Model-Nr.	CB4-5W-6XL2130
Dimensions	10"L x 11"W x 8.25"H

004 Cube®



Recessed Cam Input

Side View
with Circuits 3-6Side View
with Circuits 1-2

Fully Customizable with L15-20/L15-30/L21-20/L5-20/L5-30/L6-20/L6-30/L14-20/L14-30 Twist-Locks

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	6- 30A 120/208V L21-30 3- 20A 120V Duplex Outlets*
Protected By	6- 30A 3P Breaker 3- 20A 1P Breaker*
Model-Nr.	CB2-5WPT-6XL2130-3X520
Dimensions	15"L x 10"W x 10.75"H

005 Cube®

*Optional 3-20A
Duplex Courtesy Outlets

Fully Customizable with L15-20/L15-30/L21-20/L5-20/L5-30/L6-20/L6-30/L14-20/L14-30 Twist-Locks

006 Cube®

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	4- 20A 120/208V L21-20 4- 30A 120/208V L21-30 3- 20A 120V Duplex Outlets*
Protected By	4- 20A 3P Breaker 4- 30A 3P Breaker 3- 20A 1P Breaker*
Model-Nr.	CB2-5WPT-4XL2120-4XL2130-3X520
Dimensions	15"L x 10"W x 10.75"H



*Optional 3-20A
Duplex Courtesy Outlets

007 Cube®

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	12- 30A 120/208V L21-30 3- 20A 120V Duplex Outlets*
Protected By	12- 30A 3P Breaker 3- 20A 1P Breaker*
Model-Nr.	CB3-5WPT-12XL2130-3X520
Dimensions	21.5"L x 10"W x 10.75"H

*Optional 3-20A
Duplex Courtesy Outlets



400A Pass Through
with Circuits 7-12



Recessed Cam Input
with Circuits 1-6

Fully Customizable with L15-20/L15-30/L21-20/L5-20/L5-30/L6-20/L6-30/L14-20/L14-30 Twist-Locks

008 Cube®

Input Device	100A 3Ø Locking Cam
Output Device	3- 20A 120V Duplex Outlets 4- 20A 120/208V L21-20
Protected By	3- 20A 1P Breaker 4- 20A 3P Breaker
Model-Nr.	CB4-5W-4XL2120-3X520
Dimensions	10"L x 11"W x 8.25"H



Recessed Cam Input
with Circuits 1-2



Side View with
Circuits 3-7



Rear View

009 Cube®

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	2- 20A 120V Duplex Outlets 4- 20A 120V 6 Circuits 19Pin
Protected By	26- 20A 1P Rocker Breaker
Model-Nr.	CB2-5WPT-4X19P120
Dimensions	15"L x 10"W x 10.75"H



Recessed Cam Input
with 19 Pin 120V Circuits 1-12



400A Pass Through
with 19 Pin 120V Circuits 13-24

010 Cube®

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	6- 20A 120V 6 Circuits 19Pin
Protected By	38- 20A 1P Rocker Breaker
Model-Nr.	CB3-5WPT-6X19P120
Dimensions	24"L x 12"W x 11.75"H



Recessed Cam Input
with 19 Pin 120V Circuits 1-18



400A Pass Through
with 19 Pin 120V Circuits 19-36



012 Cube®

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	2- 20A 120V Duplex Outlets 2- 20A 240V 6 Circuit 19 Pin
Protected By	2- 20A 1P Breaker 12- 20A 2P Breaker
Model-Nr.	CB2-5WPT-2X19P240-2X520
Dimensions	15"L x 10"W x 10.75"H



**Recessed Cam Input
with 19 Pin 240V Circuits 1-6**



**400A Pass Through
with 19 Pin 240V Circuits 7-12**

013 Cube®

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	2- 20A 240V 6 Circuit 19Pin 4- 20A 250V L6-20
Protected By	16- 20A 2P Breaker
Model-Nr.	CB2-5WPT-2X19P240-4XL620
Dimensions	15"L x 10"W x 10.75"H



**Recessed Cam Input
with 19 Pin 240V Circuits 1-6**



**400A Pass Through
with L6-20 Circuits 1-2**

014 Cube®

Input Device	400A 3Ø Locking Cam
Output Device	2- 20A 120V Duplex Outlets 1- 20A 240V 6 Circuit 19Pin 6- 20A 250V Twistlock
Protected By	2- 20A 1P Breaker 12- 20A 2P Breaker
Model-Nr.	CB2-5W-1X19P240-6XL620
Dimensions	15"L x 10"W x 10.75"H



**Recessed Cam Input
with 19 Pin 240V Circuits 1-6**



**Rear View
with L6-20 Circuits 7-12**

015 Cube®

Input Device	100A 3Ø Locking Cam
Output Device	3- 20A 120V Duplex Outlets 2- 20A 120V 6 Circuit 19Pin
Protected By	15- 20A 1P Rocker Breaker
Model-Nr.	CB4-5W-2X19P120-3X520
Dimensions	10"L x 10"W x 8.25"H



3-Courtesy 20A Duplex Outlets



19 Pin 120V Circuits 1-12

Recessed Cam Input

016 Cube®

Input Device	180A 3Ø Locking Cam
Output Device	3- 20A 120V Duplex Outlets 2- 20A 240V 6 Circuit 19Pin
Protected By	3- 20A 1P Breaker 12- 20A 2P Breaker
Model-Nr.	CB1-5W-2X19P240-3X520
Dimensions	13"L x 10"W x 8.25"H



**Side View with
19 Pin 240V Circuits 1-6**



**Rear View with
19 Pin 240V Circuits 7-12**

Recessed Cam Input

017 Cube®

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	4- 20A 240V 6 Circuit 19Pin 2- 20A 120V Duplex Outlets
Protected By	24- 20A 2P Breaker 2- 20A 1P Breaker
Model-Nr.	CB3-5WPT-4X19P240-2X520
Dimensions	24"L x 12"W x 11.75"H



**Recessed Cam Input
with 19 Pin 240V Circuits 1-12**



**400A Pass Through
with 19 Pin 240V Circuits 13-24**

035 Cube®

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	4- 20A 240V 6 Circuit 19Pin 4- 20A 120V 6 Circuit 19Pin 2- 20A 120V Duplex Outlets
Protected By	24- 20A 2P Breaker 2- 20A 1P Breaker
Model-Nr.	CB3-5WPT-4X19P120-240V
Dimensions	24"L x 12"W x 11.75"H



**24 Circuit 19 Pin 120/240V
Dual Voltage Cube**



036 Cube®

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	8- 20A 120V 6 Circuit 19Pin 2- 20A 120V Duplex Outlets
Protected By	50- 20A 1P Breaker
Model-Nr.	CB3-5WPT-8X19P120
Dimensions	24"L x 12"W x 11.75"H



018 Cube®

Input Device	400A 1Ø Locking Cam 1 Pass Through
Output Device	6- 50A 120/240V 3P 4W CS6369 Twistlocks 2- 20A 120V Duplex Outlets
Protected By	6- 50A 2P Breaker 2- 20A 1P Breaker
Model-Nr.	CB2-4WPT-6XCS6369-2X520
Dimensions	15"L x 10"W x 10.75"H



**Side View with 400A
Pass Through and 50A Circuits 4-6**



**Recessed Cam Input with
50A Circuits 1-3**

Also available as 5 Wire 3Ø Version

019 Cube®

Input Device	400A 1Ø Locking Cam 1 Pass Through
Output Device	2- 20A 120V Duplex Outlets 4- 50A 120/240V 14-50 2- 30A 120V Straight Blades
Protected By	2- 20A 1P Breaker 4- 50A 2P Breaker 2- 30A 1P Breaker
Model-Nr.	CB2-4WPT-4X50ARV-2X30ARV-2X520
Dimensions	15"L x 10"W x 10.75"H



Side View



Recessed Cam Input

Also available as 4x30A/2x50A RV Combo



020 Cube®

Input Device	220A 1Ø Locking Cam
Output Device	4- 50A 120/240V 3P 4W CS6369 Twistlocks 2- 20A 120V Duplex Outlets
Protected By	4- 50A 2P Breaker 2- 20A 1P Breaker
Model-Nr.	CB4-4W-4XCS6369-2X520
Dimensions	10"L x 10"W x 8.25"H

Also available as 5 Wire 3Ø Version

Side View with 50A Circuits 1-2
and 2-20A Courtesy Duplex Outlets

Recessed Cam Input

Rear View with
50A Circuits 3-4

Input Device	230A 1Ø Locking Cam
Output Device	4- 50A 120/240V 14-50 2- 30A 120V Straight Blades
Protected By	4- 50A 2P Breaker 2- 30A 1P Breaker
Model-Nr.	CB4-4W-4X50ARV-2X30ARV
Dimensions	10"L x 10"W x 8.25"H

Also available as 5 Wire 3Ø Version



Side View



Recessed Cam Input



Rear View

021 Cube®

Input Device	100A 3Ø Locking Cam Tail
Output Device	2- 20A 120V Duplex Outlets 3- 100A 120V Stage Pin
Protected By	2- 20A 1P Breaker 3- 100A 120V 1P Breaker
Model-Nr.	CB-C30-TAIL
Dimensions	13"L x 10"W x 8.25"H



037 Cube®

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	2- 20A 120V Duplex Outlets 6- 100A 120V Stage Pin
Protected By	2- 20A 1P Breaker 6- 100A 120V 1P Breaker
Model-Nr.	600A Stage Pin Distro
Dimensions	15"L x 10"W x 10.75"H



Double Ground Version



Rear View



Single Ground Version

026 Cube®

Input Device	400A 3Ø 6Wire Locking Cam 1 Pass Through
Output Device	2- 20A 120V Duplex Outlets 6- 100A 120V Stage Pin 3- 100A 240V Stage Pin
Protected By	2- 20A 1P Breaker 6- 100A 2P Breaker 3- 100A 2P Breaker
Model-Nr.	1200A Stage Pin Distro
Dimensions	24"L x 12"W x 11.75"H

Additional Standard Studio Stage Pin Configurations Available (300A/900A/Pigtail)



028 Cube®

029 Cube®

Input Device	400A 3Ø Locking Cam
Output Device	3 Rows 400A 3Ø Locking Cam
Protected By	NA
Model-Nr.	SPI-1-3-CB
Dimensions	15"L x 8.5"W x 8.25"H



030 Cube®

Input Device	2 Rows of Parallel 400A (2400A Total) 3Ø Locking Cam
Output Device	3 Rows 400A 3Ø Locking Cam
Protected By	NA
Model-Nr.	SPI-2-3-CB
Dimensions	15"L x 8.5"W x 10.75"H



2400A (800A per Leg)
Parallel Cam Input

031 Cube®

Input Device	2 Rows of Parallel 400A (2400A Total) 3Ø Locking Cam (Double Neutral)
Output Device	6- Rows of 5Wire (Double Neutral) Locking Cam
Protected By	NA
Model-Nr.	IND-SPI-2400 (2-4 Spider)
Dimensions	23"L x 9"W x 14.25"H



Side View



2400A (800A per Leg)
Parallel Cam Input



Rear View

Also available as 4-4 (4800A) Spider

022 Cube®

Input Device	100A 120/208V 4P 5Wire Pin & Sleeve Male Inlet
Output Device	1- 20A 120V Duplex Outlets 5- 20A 120/208V L21-20
Protected By	1- 20A 1P Breaker 5- 20A 3P Breaker
Model-Nr.	CB4-1PS-5xL2120-1x520
Dimensions	10"L x 10"W x 8.25"H



100A Pin & Sleeve Input



Side View

023 Cube®

Input Device	60A 120/208 4P 5Wire Pin & Sleeve Male Inlet
Output Device	9- 20A 120V Duplex Outlets
Protected By	9- 20A 1P Rocker Breaker
Model-Nr.	CB4-6PS-9x520
Dimensions	10"L x 10"W x 8.25"H



60A Pin & Sleeve Input



Side View

The Ultimate Rugged Enclosure System Designed for Extra-Hard Usage

Integrated Handles

6 Way 60A Pin & Sleeve

Stacking Rails

Shock Absorbing Molded Rubber Corners

Rugged Non-Conductive Enclosure

Easy Panel Access - Great Serviceability

Recessed Branch Devices

Fully Enclosed Color Coded Cam Covers

6" Ground Clearance Stand



NEMA 3R Outdoor



100% Stackable



12 Way L21-30 / Edison Stack



18 Way GFCI Edison



6 Way 50A PDU



Custom Touring Stack

- Endless Versatility of Configurations - Dry Locations & Outdoor NEMA 3R
- Continuous Reliability in Mud, Rain, Snow or other Unexpected Challenging Situations
- Ideal for Larger Configurations with Build-In Main Breakers (100 - 400A)
- All Enclosures are Dimensionally Designed with a Common Footprint
- Solid Internal Bus bar Construction
- Easy to Carry / Advanced Stacking System
- State of the Art in Safety and Weather Resistance

6"

Adjustable Breaker Settings
Range: 400-160A / 250-100A

Lock-out Door for
Main Breaker Access



400-150A Disconnect Series



4x100A Cam Disconnect

Digital 3 Phase
Multi - Meter



Spider Series



Custom Series

Main Breaker with Public
Lock - Out Door (adj. 400 - 160A)

Custom Configurations Quotes Next Business Day - Call us today!

Input Device	400A 3Ø Locking Cam
Output Device	400A 3Ø Locking Cam
Protected By	1- 400A MCCB (400-160A)* 1- 250A MCCB (250-100A)** 1- 200A MCCB (Fixed Setting)***
Model-Nr.	D400* D250** D200***
Dimensions	21.75"L x 11.75"W x 12.75"H* 21.75"L x 11.75"W x 12.75"H** 21.75"L x 11.75"W x 10.75"H***




Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	12- 30A 120/208V L21-30
Protected By	12- 30A 3P Breaker
Model-Nr.	AT-5WPT-12XL2130
Dimensions	21.75"L x 11.75"W x 17"H

4 Panel Space Enclosure → Fully Customizable for Dry Locations or Weatherproof



Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	6- L21-30 6- 30A 120/208V L21-30
Protected By	6- 30A 3P Breaker
Model-Nr.	AT-5WPT-6XL2130
Dimensions	21.75"L x 11.75"W x 10.75"H

2 Panel Space Enclosure → Fully Customizable for Dry Locations or Weatherproof

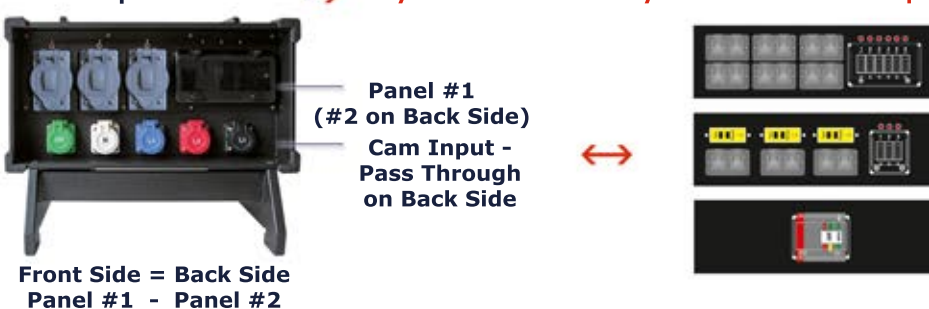

Multiple configurations such as Cam, Pin & Sleeve, 19 Pin, Stage Pin, Straight Blade, Twistlock and GFCI are available in standard or custom configurations

Input Device	400A 3Ø Locking Cam 1 Pass Through
Output Device	6- 50A 120/240V 3P 4W CS6369 Twist-Locks
Protected By	6- 50A 2P Breaker
Model-Nr.	AT-5WPT-6XCS6369
Dimensions	21.75"L x 11.75"W x 10.75"H



Also available as 4 Wire 1Ø Version

Also available with 4 Wire Cam In/Out

Input Device	50A 125/250V 3Pole 4Wire 1 Pass Through
Output Device	6- 20A 120V Duplex Outlets 6- 20A 5mA GFCI Reset Modules
Protected By	6- 20A 1P Breaker
Model-Nr.	FB-F5-PT-03-3R
Dimensions	17.75"L x 10"W x 11.75"H





Input Device	80A 3Ø Locking Cam
Output Device	12- 20A 120V Duplex Outlets
Protected By	12- 20A 1P Breaker
Model-Nr.	SC-5W-12X520
Dimensions	19"L x 6.5"W x 13.5"H



Input Device	200A 3Ø Locking Cam
Output Device	6- 30A 120-208V L21-30 3- 20A 120V Duplex Outlets*
Protected By	6- 30A 3P Breaker 3- 20A 1P Breaker*
Model-Nr.	SC-5W-6XL2130
Dimensions	19"L x 6.5"W x 13.5"H



*Optional 3-20A
Duplex Courtesy Outlets

Also available with L15-20 / L15-30 / L21-20 / L5-20 / L5-30 / L6-20 / L6-30 / L14-20 / L14-30 Twist-Locks

Input Device	160A 3Ø Locking Cam
Output Device	4- 20A 120V 6 Circuit 19Pin
Protected By	24- 20A 1P Breaker
Model-Nr.	SC-5W-4X19P120
Dimensions	19"L x 6.5"W x 13.5"H



Input Device	340A 3Ø Locking Cam
Output Device	1- 20A 240V 6 Circuit 19Pin 6- 20A 240V L6-20 3- 20A 120V Duplex Outlets
Protected By	24- 20A 2P Breaker 23- 20A 1P Breaker
Model-Nr.	SC-5W-1X19P240-6XL620-3X520
Dimensions	19"L x 6.5"W x 13.5"H



Custom Configurations Quotes Next Business Day - Call us today!



Input Device	100A 120V Stage Pin 1 Pass Through
Output Device	5- 20A 120V Duplex Outlets
Protected By	5- 20A 1P Breaker
Model-Nr.	FB-B10PT-02
Dimensions	9.75\"L x 6.5\"W x 8.75\"H



Also available with 20A Stage Pin, 19 Pin, Twist-Lock, Straight Blade or Custom Configurations

Input Device	100A 120V Stage Pin 1 Pass Through
Output Device	2- 30A 120V Straight Blades 2- 20A 120V Duplex Outlets
Protected By	2- 30A 1P Breaker 2- 20A 1P Breaker
Model-Nr.	FB-100PT-2x30-2x520
Dimensions	9.75\"L x 6.5\"W x 8.75\"H



Input Device	50A 120/240V 3 Pole 4 Wire Twist-Lock, 1 Pass Through
Output Device	6- 20A 120V Duplex Outlets
Protected By	6- 20A 1P Breaker
Model-Nr.	FB-F5-PT-03
Dimensions	11\"L x 8\"W x 8.75\"H



Fully Recessed 50A Pass Through

Input Device	100A 120/240V 3Pole 4Wire Mini Cams
Output Device	8- 20A 120V Duplex Outlets
Protected By	8- 20A 1P Breaker
Model-Nr.	FB-MC10-8x520
Dimensions	12.25\"L x 8\"W x 8.75\"H

Fully Recessed Mini Cams



Custom Configurations Quotes Next Business Day - Call us today!

Input Device	30A 3Ø L21-30 Twistlock 1 Pass Through
Output Device	3- 20A 120V Duplex Outlets
Protected By	3- 20A 1P Breaker
Model-Nr.	FB-F3PT-01
Dimensions	8.25"L x 4.5"W x 4.75"H



Input Device	20A 3Ø L21-20 Twistlock 1 Pass Through
Output Device	3- 20A 120V Duplex Outlets
Protected By	No Breaker
Model-Nr.	L21-20 Doghouse
Dimensions	7.5"L x 4.5"W x 4.75"H



Input Device	50A 3 Pole 4 Wire Twistlock
Output Device	6- 20A 120V Duplex Outlets
Protected By	6- 20A 1P Breaker
Model-Nr.	FB-F5-PT-03 Tail
Dimensions	11.5"L x 5.5"W x 4.75"H



Input Device	100A 120V Stage Pin
Output Device	5- 20A 120V Duplex Outlets
Protected By	5- 20A 1P Breaker
Model-Nr.	Gangbox 100A
Dimensions	13.75"L x 5.5"W x 4"H



Also available as 60A Stage Pin 3 Way 20A Duplex Version (Gangbox 60A)

Input Device	60A 120/208V 4 Pole 5 Wire Pin & Sleeve
Output Device	3- 20A 120/208V L21-20
Protected By	3- 20A 3P Breaker
Model-Nr.	FB-60A 3 Way L21-20
Dimensions	10"L x 7"W x 7"H



INDU-Electric Wall-Mounting Distribution Units

The Perfect Power Solution for Arenas, Convention Centers and Studios



200-400A Company Switch



Input Device	200/250/400A 3Ø Conduit
Output Device	200/250/400A 3Ø Locking Cam
Protected By	1- 400A MCCB (400-160A)* 1- 250A MCCB (250-100A)** 1- 200A MCCB (Fixed Setting)***
Model-Nr.	D400-87* D250-87** D200-87***
Dimensions	17.75"L x 11.75"W x 29.25"H* 17.75"L x 11.75"W x 29.25"H** 17.75"L x 11.75"W x 23.25"H***



All Wall-Mounting Units can be Fitted on Heavy Duty Carts



Custom Wall Mount



INDU-Electric Rugged Touring Rack Distribution Units

36 Circuit Dual Voltage 120/208V
Tourpack



Back

Aluminum Frame with Stacking Pocket

Courtesy 20A Edisons

Digital 3 Phase Multi - Meter

Main Breaker with Public
Lock - Out Door (adj. 400 - 160A)

100% Rated Hydraulic Magnetic
Breakers For Continuous Use

5 Wire (Double Neutral)
400A CAMS per Leg

Dead - Front Doors Available for Transport

Standart Compact 24" L x 24" W Truck / Trailer Footprint

Easy to Service - Completely Removable Front and Back - Panels



Front

24"L x 24"W x 28"H



Stack Side View



Stack Front View

100% Stackable

- Heavy Duty Aluminum Frames & Castors
- Ideal For Touring
- Multiple Sizes with Common 24x24" Footprint
- Non-Conductive Enclosure
- Domestic / International Configurations
- Easy Set Up and Break Down
- Customizable for Indoor & Outdoor NEMA 3R

Also Available in Classic
Touring Flightcases



6 Way 60A GFI Tourpack

24"L x 24"W x 41.5"H



Flush Dead - Front Door
with Recessed Latches



12 Way 50A Tourpack



400A Main
Breaker Panel



12 Way L21-30
Systems Tourpack



4 Way 100A
Pin & Sleeve



Disconnect 4x100A Cams

24"L x 24"W x 24"H

INDU-Electric Power Where You Need It!

Aluminum Frame



Fully Enclosed Color Coded Cam Covers

Non-Conductive Enclosure



Heavy Duty Castors



Main Breaker with Public Lock - Out Door (adj. 400 - 160A)



- Heavy Duty Aluminum Frames
- Standard 22.5\"L x 20.5\"W x 40.25\"H Size
- Fully Customizable

- Domestic /International Configurations
- Easy Set Up and Break Down
- Indoor & Outdoor NEMA 3R

TRANSFORMER SERIES

Custom 150kVA Touring Transformer



Custom 75kVA Touring Transformer



- Portable Step-Down/Isolation Transformers up to 150kVA
- Heavy Duty Cart with Optional Fork Lift Pockets
- INDULENE HYBRID PLUS Enclosure System
- Available in WYE (Y) or Delta Configurations (600/480/240/208/120VAC)
- Ideal for International Touring
- Fully Customizable



45kVA Isolation Transformer



NEMA 3R Outdoor

- Fully Enclosed System
- Stainless Steel Frame
- Lockable Latches Prevent Public Access
- Custom Solutions
- Outdoor Rain- Tight in Use
- GFCI Options
- Main Breaker Protection
- Suitable for Permanent Installations
- The State of the Art Solution for Amusement Parks

Sample Custom Configuration

Input Device	400A 3Ø Locking Cam Pass Through
Output Device	2 Sets 150A 120/208V Cams 3 Sets 100A 120/208V Minicam 2 Sets 60A 120/208V Minicam 6- 60A 120/208V 14-60 Straight Blade 6- 30A 120/208V L14-30 Twistlocks 3- 30A 120V L5-30 Twistlocks 1- 20A 120V GFCI Duplex Outlet
Protected By	2- 150A 3Pole MCCB Main 3- 100A 3Pole/ 2- 60A 3Pole 6- 60A 2Pole/ 6- 30 2Pole
Model-Nr.	GAL-DB400
Dimensions	30"L x 27.5"W x 44"H

Non-Conductive Enclosure build into Fully Enclosed Stainless Steel Cabinet



Pad Mount



The Perfect Solution for Remote Switch Management



- Standard DMX 512 Protocol
- State of the Art LED DMX Control Board
- Non-Conductive Enclosure
- Heavy Duty Cart System
- Multiple Standard Studio Configurations for Stage Pin/19Pin up to 24kw
- The State of the Art Solution for Motion Picture Studios

Input Device	400A 3Ø Locking Cam Double Neutral and Ground Voltage Metering Test Jacks
Output Device	16- 20A 120V 6 Circuit 19Pin 2 Parallel per 6-Channel (48 DMX Controlled Channels Suitable for 2.4kw Loads) 1- 20A 120V Courtesy Duplex Outlet
Protected By	48- 20A 1P Breakers (19Pin) 1- 20A 1P Breaker (Courtesy Outlet)
Model-Nr.	48-Channel Remote DMX Cart
Dimensions	39.5"L x 17"W x 22"H

Shock Absorbing Molded Rubber Corners



6-Channel Remote DMX 100A Lunch Box

Input Device	100A 120V 1Ø Stage Pin
Output Device	6- 20A 120V Duplex Outlets (6 DMX Controlled Channels Suitable for 2.4kw Loads)
Protected By	6- 20A 1P Rocker Style Breakers
Model-Nr.	100A DMX Lunch Box
Dimensions	13.25"L x 10"W x 10"H

Local/Remote Selector Switches Channel 1-6

LED DMX Control Board



DMX In/Out

Standard Studio Stage Pin Configurations Suitable for DMX Control



900A Stage Pin



1200A Stage Pin



600A Stage Pin



300A Stage Pin

INDU-ELECTRIC Your Ultimate One-Stop-Shop for Custom Cable Assemblies & Power Distribution



Twist Lock Assemblies



Arc-Tite Extensions

- Cam/Pin & Sleeve Assemblies
- 19-Pin Adapters (Break-In, Break-Out)
- Twistlock/Edison/Stage Pin Extensions
- Industrial Arc-Tite Extensions/Adapters
- Advanced Cable Management Products
- Outlet Stringers
- Single Conductor Feeder Cables
- Banded Cable Extensions
- In-Line GFCI-Disconnects



Cam Feeder Cables



Banded Stage Pin Extensions



Pin & Sleeve



Indoor / Outdoor Outlet Stringers



19 Pin Extensions



Edison Extensions



In-Line GFCI Disconnects



Snake Bites



19 Pin Stage Pin Break-Outs



Cam Accessories



Stage Pin Splitters



RV Cables & Adapters

Wherever you are...

... you can rely 100% on the Power Distribution Boxes of INDU-ELECTRIC



INDU-ELECTRIC Around the World • California • New York • Germany
www.indu-electric.com

INDU-ELECTRIC North America Inc. • 24856 Avenue Rockefeller • Valencia, CA 91355
Phone: 310-578-2144 • Fax: 818-688-3924
usa@indu-electric.com



www.indu-electric.com