


Input Type:	Branch Devices:	Protection:
Powerlock 3P+N+PE AUS colours	Powerlock 3P+N+PE AUS colours	1xMCCB 125A 4P+shunt
1xmain MCCB 400A 4P	1xC EE 125A 400V 5P	1xadjustable and key switchable RCD
3xLED	2xC EE 63A 400V 5P	2xMCB 63A "C" 4P+shunt
1xdigital Multimeter	3x50A Clipsal AUS	2xadjustable and key switchable RCD
1x Earth Screw M12		3xMCB 50A "C" 4P+shunt
		3xadjustable and key switchable RCD
Neons for each socket outlet.		
shock absorbent rubber corners		
Dimensions:	Rating:	Options:
Lenght: 540,00 mm	Rated Voltage: 230/400 V ~	
Height: 650,00 mm	Rated Current: 400A / 50/Hz	
Width: 520,00 mm	Protection: IP44	
Weight: -kg	RDF: 0,49	

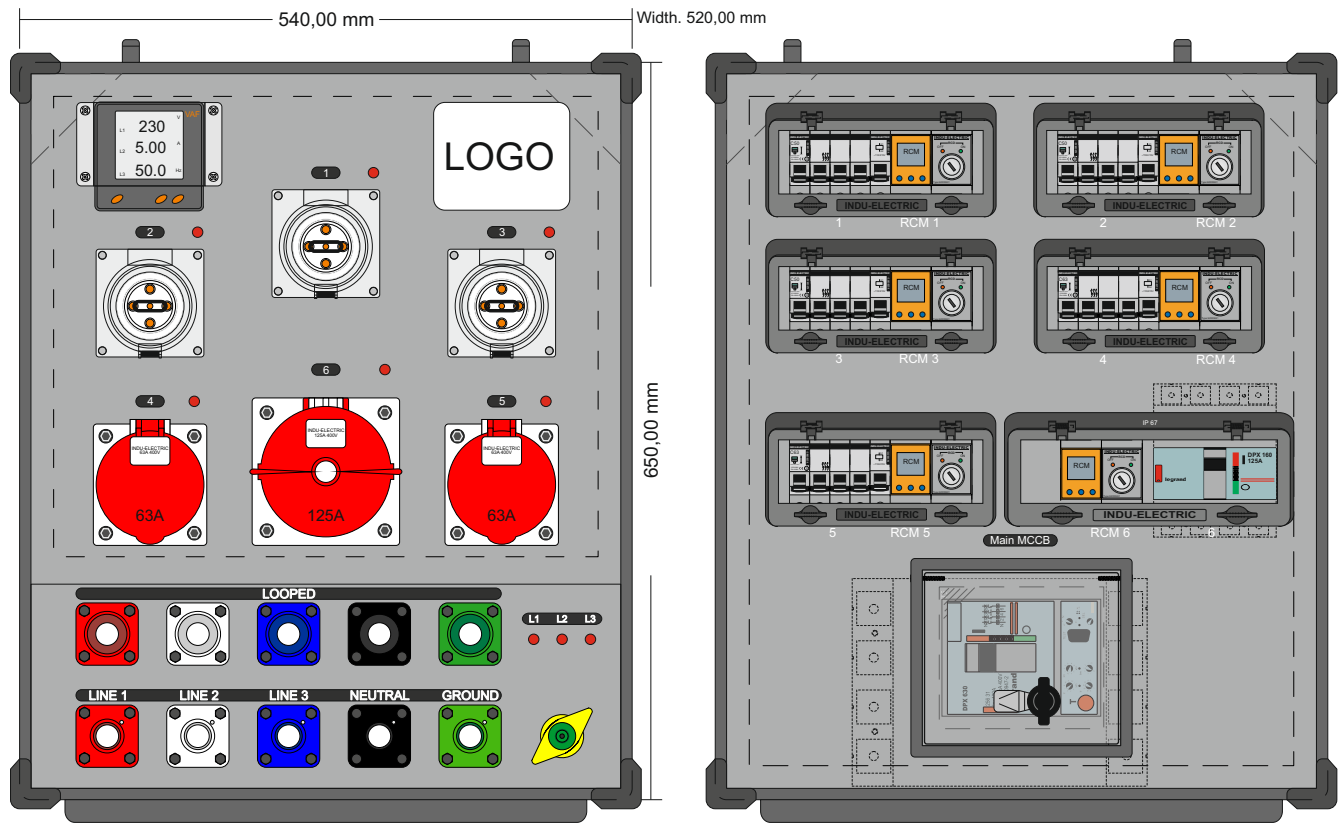

 INDU-ELECTRIC Gerber GmbH	INDU-ELECTRIC Gerber GmbH Am Henselsgraben 8 D-41470 Neuss			Project: Type 54					
				Scaling: 60% Revision:			Type: PREAIR-543x50-POW-2023		
Approval:		0		0	11415280		Page: -1-		