


Technical Data Sheet

Fiberflect™ Tape AB

Product Name: Fiberflect™ Tape AB

Technical Description: A highly reflective, high-adhesion tape, ideal for radiant heat applications. Fiberflect™ Tape AB is constructed of a texturized glass fiber base. One side consists of a thin layer of aluminum foil and the other, a pressure-sensitive adhesive to facilitate installation.

The durable construction of Fiberflect™ Tape AB is suitable for demanding applications up to 400°F (204°C) direct continuous operating temperature. The glass base fabric will stay intact up to 1000°F (538°C)

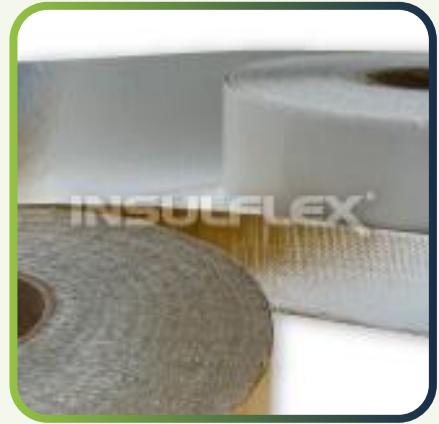

Product Overview: Fiberflect™ Tape AB has good flame, abrasion, water, and oil resistance characteristics, and exhibits outstanding properties of flexibility, toughness, and tensile strength.

Fiberflect™ Tape AB is designed to reflect radiant heat energy, minimizing the heat energy transfer through the glass fiber base.

Available In: Fiberflect™ Tape AB has a thickness of 0.027" (.76mm) and is available in 2" (51mm) and 4" (102mm) widths in 150ft rolls.

Installation: Depends on a wide variety of application parameters.

Cautionary Notes: Not recommended for extreme molten splash applications.

Disclaimer: Due to the range of possible applications, no warranty is expressed or implied. ADL Insulflex, Inc.'s liability is limited solely to the replacement of defective material. ADL Insulflex, Inc. will not be held liable for any consequential damages arising from the use or misuse of the material. While the information given herein is believed to be reliable, ADL Insulflex, Inc. makes no warranties as to the accuracy or completeness. Samples of all Insulflex® products are available at no cost or obligation, and suitable trials should be made prior to installation.

Telephone

North America: (800) 461-9323
International: (905) 377-1488

ADL Insulflex, Inc.

94 Wilmott Street
Cobourg, ON
K9A 0E9

Fax

North America: (800) 461-9328
International: (905) 377-1484