


Model: AC5 ELEGANT 1L CAMEL

Codes: 100316405

Group: G-210

Format: 19,3X138,3X0,8CM

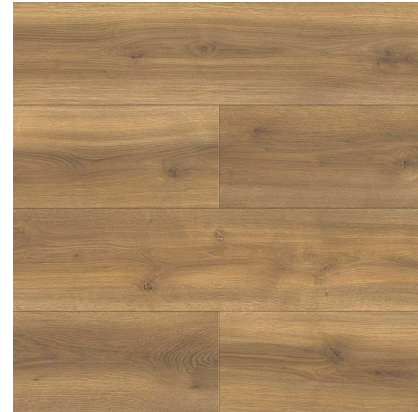

















## COMPOSITION



	Size	Material	Type of material
Layer 1	0.2	Melamine	Aminoplastic thermosetting resins
Layer 2	0.2	Decorative paper	
Layer 3	7.5	HDF	High density fibre board
Layer 4	0.1	Backside	Sheets of kraft paper impregnated with phenolic resins

## FEATURES

-  Imitates the surface of wood
-  Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.
-  5-year warranty on installations for residential use in models cataloged as suitable for bathrooms and kitchens.
-  Format where only one board has been used to finish the entire base surface
-  Environmental Product Declarations for Construction (DAPcons®) are an essential instrument for environmental improvement in the construction sector and, therefore, a useful tool for technicians, manufacturers and users. DAPcons® certifications cover products from the different stages of a building. They provide objective, agreed and verified information on a product.
-  Mounting system in which you only have to adjust the slat to be installed lengthwise without inclination near the one already placed, hitting with a block the end of the piece on the short side to be placed to finish joining the joints. The two pieces will fit together and will be held in place by the pressure exerted.
-  33. Intensive commercial
-  33. Intensive residential
-  Suitable for bathroom and kitchen floors for residential use, provided that the product's installation instructions are always followed.
-  Beveled cut on all 4 edges of the board for emphasizing size
-  25 25 year warranty for domestic use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329.
-  5 5 year warranty for commercial use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329.
-  Is suitable for installing on water radiant heating
-  PanEuropean Forest Certification that guarantees to consumers the origin of the products from sustainably managed forests
-  23. Intensive residential
-  ACS Abrasion-resistance level as per Standard UNE-EN 13329



## DIMENSIONAL FEATURES

Item thickness	≤0.50 mm	EN 13329*
Length of face	0.50 mm	EN 13329*
Width of face	$\Delta$ medio≤0.10 medio/máx-min≤0.20 mm	EN 13329*
Squareness of the item (q)	≤0.20 mm	EN 13329*
Straightness of face	≤0.30 mm/M	EN 13329*
Flatness of item (f)	fw cóncavo≤0.15/fw convexo≤0.20/fl cóncavo≤0.50/fl convexo≤1.00 %	EN 13329*
Joint between items	medios≤0.15/máx≤0.20 mm	EN 13329*
Difference in height among items	Max≤0.15 mm Prom≤0.10 mm	EN 13329*
Dimensional variations related to changes in relative moisture	medios≤0.9 mm	EN 13329*
Uv light fastness	Mejor nivel 4 escala de grises/mejor nivel 6 cianoescala	EN 20105-A02 / EN ISO 105-B02*
Surface stripping	≥1.25 N/mm2	EN 13329*

## LABORATORY TESTS

Resistance to abrasion	AC5	UNE EN 13329:2000*
Impact resistance	(Bola grande) (Bola pequeña)≥1000 mm/≥15 N	EN 13329*
Resistance to staining	Grado 5 (G 1 y 2) y Grado 4 (G 3)	EN 438-2.15*
Resistance to cigarette burns	4	EN 438-2.18*
Swelling in thickness	≤12%	EN 13329*
Moisture upon leaving factory	4 - 7 %	
Dimensional stability	≤0.90 mm	EN 13329*
Formaldehyde emissions	<0.1 ppm (E1)	EN 717-1*
Slip resistance (wet pendulum) irhd 55	CL 1 (32)	EN 16165 Anexo C*
Tensile strength of joints	>1.0 kN/m	EN 13329*
Fire resistance	Cfl-s1	EN 13501*
Heat resistance	0,1026 M2*K/W	
Thermal conductivity	0.078 W/M*K	ISO 8302*
Acoustic insulation	IIC 61/STC 53	ASTM E492-09/ASTM E90-09*
Dynamic coefficient of friction (dcof)	0.63	ANSI A137.1*
Density of the board	900±7% kg/m3-7.2 kg/m2	UNE EN 323*
Slip resistance (pendulum-dry)	CL 3 (52)	EN 16165 Anexo C*
Topical moisture resistance	Qualitatives≤2/cuantitatives≤0.3 mm	ISO 4760*

## PACKING

Sales units per box	2.402256 M2/BOX	
Sales units per pallet	124.917293 M2/PAL	
Sales units per unit	0.266917 M2/PIECE	
Sale unit	M2	
Base unit	ST	
Sales units per square meter	1 M2	
Net weight	7.833887 KG/M2	
Gross weight	8.009972 KG/M2	

## SPECIAL PIECES

SAP	Description	Group	Boxes	Pallet	Units	SKU	Basic Unit	Net Weight	Gross weight
100320634	IGUALACION ELEGANT 1L CAMEL 4X270X1	G-155	20 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	0.7 KG/PIECES	0.72 KG/PIECES
100320603	MAMPERLAN AC5 ELEGANT 1L CAMEL 7X120	G-163	2 PIECES/BOX	200 PIECES/PAL	11.9 PIECES/M2	-	-	1.58 KG/PIECES	1.64 KG/PIECES
100320655	TRANSICION ELEGANT 1L CAMEL 4X270X1	G-155	20 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	0.7 KG/PIECES	0.72 KG/PIECES
100320645	ZOCALO ELEGANT 1L CAMEL 8X225X1,4	G-107	12 PIECES/BOX	648 PIECES/PAL	5.56 PIECES/M2	-	-	1.57 KG/PIECES	1.62 KG/PIECES

