



DATASHEET I 1000.30-GC2


In operation / In Betrieb / En fonctionnement

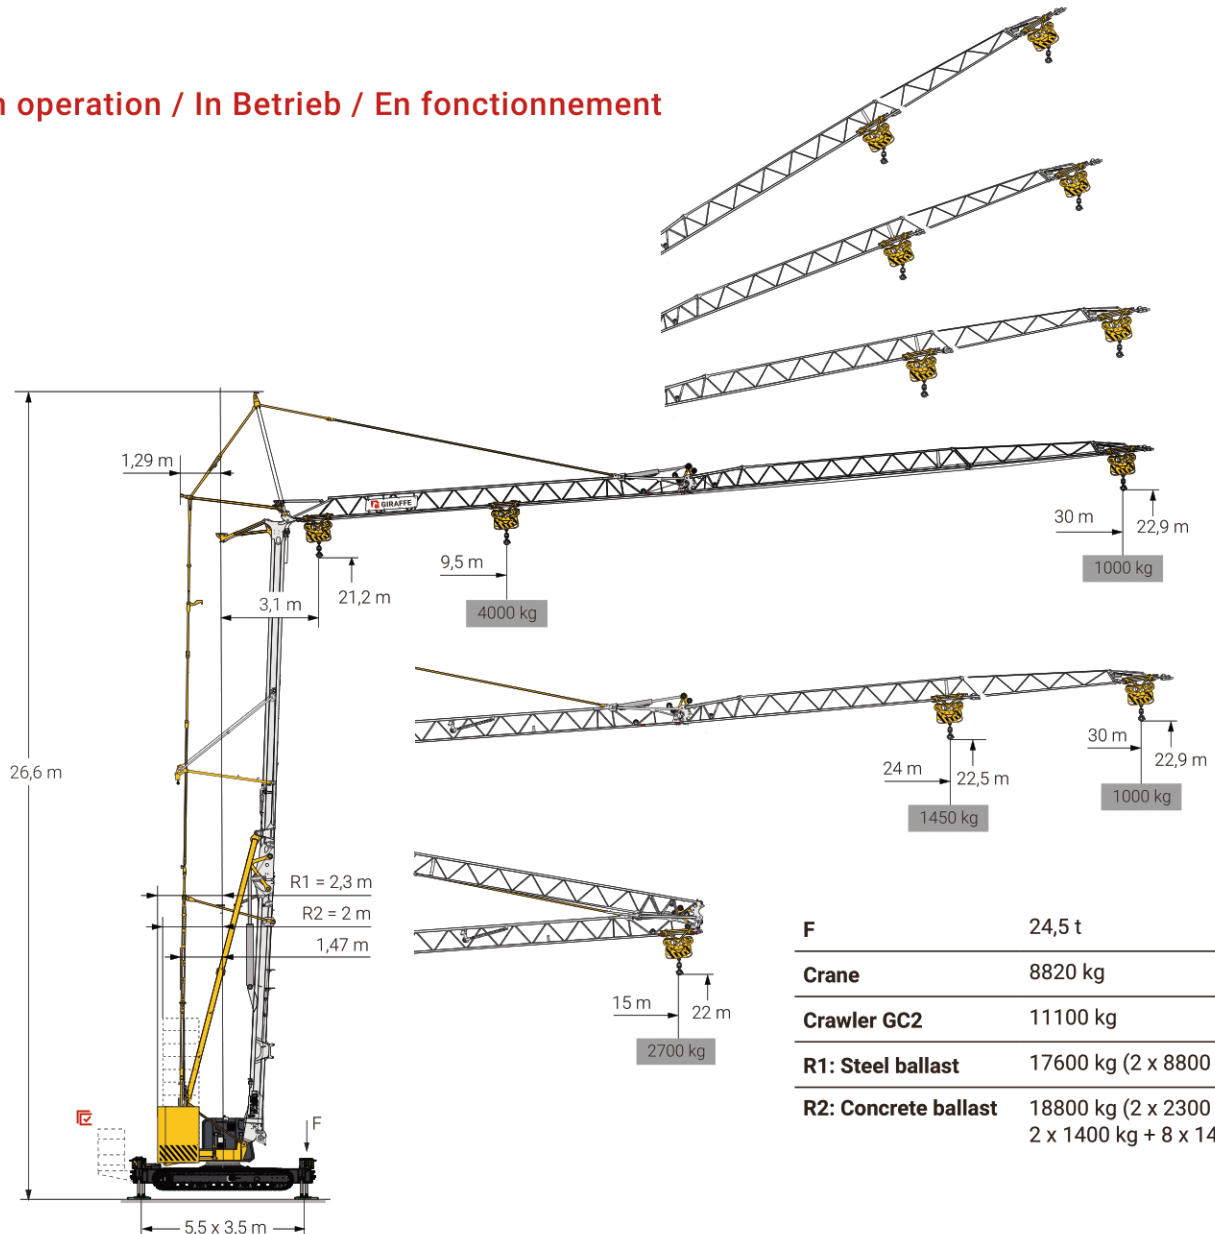

F	24,5 t
Crane	8820 kg
Crawler GC2	11100 kg
R1: Steel ballast	17600 kg (2 x 8800 kg)
R2: Concrete ballast	18800 kg (2 x 2300 kg + 2 x 1400 kg + 8 x 1425 kg)




1°

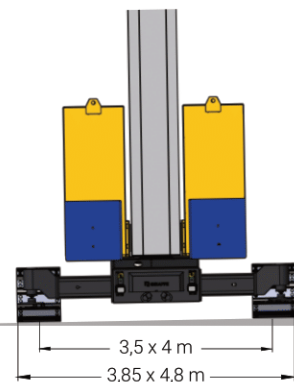


1°

Load curves / Lastkurven / Courbes de charges

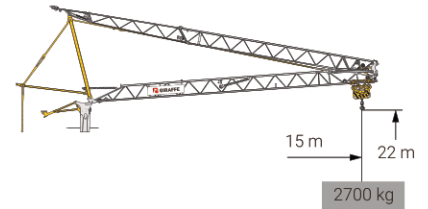


30 m	3,1	>	9,5	10	11	12	13	14	15	16	17	18	19	21	23	25	26	28	30	m			
	4000 3800 3300 3000 2750 2500 2300 2150 2000 1850 1750 1550 1400 1250 1200 1100 1000																			kg			
24 m	3,1	>		10,2	11	12	13	14	15	16	17	18	19	21	23	24	m						
	4000 3700 3300 3000 2750 2550 2350 2200 2050 1900 1700 1550 1450																			kg			


3,1	>	10,8	11	12	13	14	15	m
4000 3900 3500 3200 2900 2700 kg								
3,1	>	10,8	11	12	13	14	15	m
4000 3900 3500 3200 2900 2700 kg								

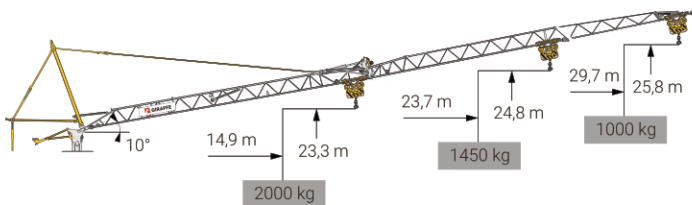

30 m	3,1	>	16,7	18	19	21	23	25	26	28	29,7	m
	2000 1850 1700 1500 1350 1250 1150 1050 1000 kg											
24 m	3,1	>	18,1	19	21	23	23,7	m				
	2000 1900 1700 1500 1450 kg											

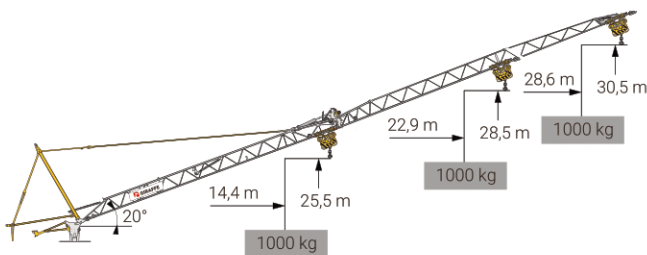

30 m	3,1	>								28,6	m	
											1000	kg
24 m	3,1	>								22,9	m	
											1000	kg

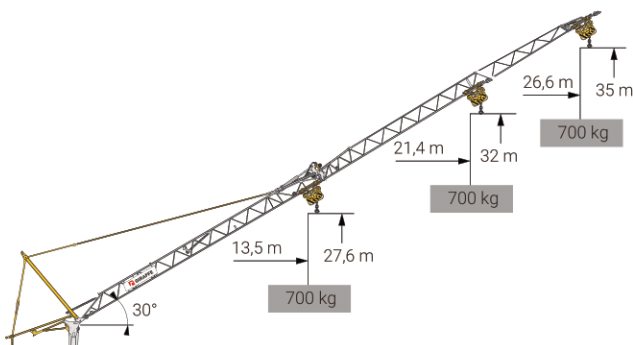


30 m	3,1	>								26,6	m	
											700	kg
24 m	3,1	>								21,4	m	
											700	kg

Mechanisms / Triebwerke / Mécanismes








400 V - 50 Hz 480 V - 60 Hz							ch-PS hp	kW
	m/min	2,1	19	36	58	65	18	13
	kg	4000	4000	2000	1000	500		
	m/min	6,1	37	37	38,5	41	3	2,2
		4000	4000	2000	1500	1000		
	tr/min U/min rpm	0 -> 0,9					4	3
	m/min	10 - 20					40	30

	 IEC 60204-32	 kVA
crane / kran / grue	400 V (+10% - 10%) 50 Hz 480 V (+6% - 10%) 60 Hz	18 -> 11 kVA
crawler / raupe / chenille	400 V (+10% - 10%) 50 Hz	40 kVA

Erection / Montage / Montage

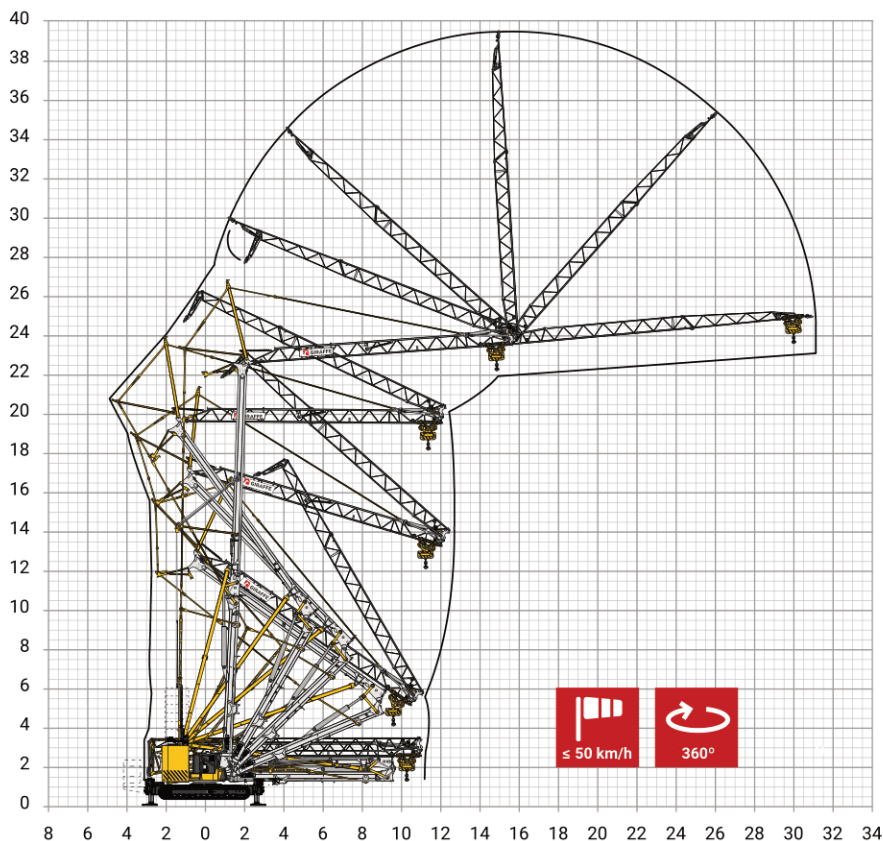

Moving / In Bewegung / En mouvement

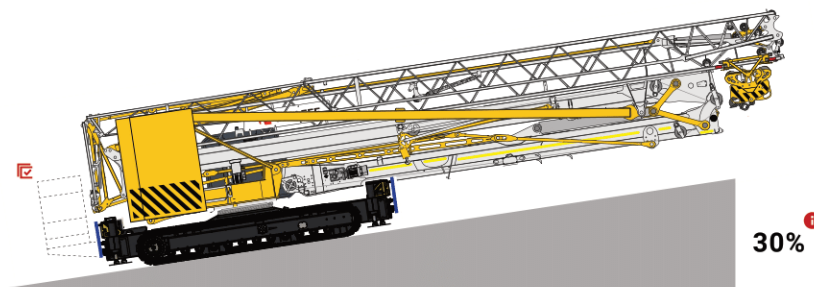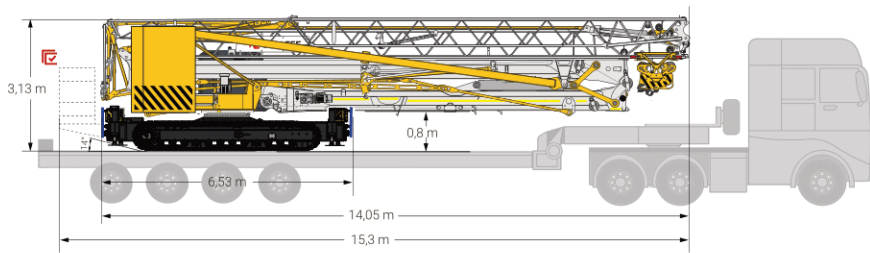

EN

-  Rear slewing radius
-  Consult us
-  Options
-  Hoisting
-  Trolleying
-  Slewing
-  Required power
-  Single phase 50 Hz

 Hook heights given with plated pulley block
This commercial document is not legally binding
For any technical information, please refer to the corresponding instructions

DE

- Schwenk radius
- Auf Anfrage
- Sonderausrüstungen
- Heben
- Katzfahren
- Schwenken
- Erforderliche Leistung
- Einphasige 50 Hz

Hakenhöhen werden mit plattiertem Haken angegeben
Unverbindliches Vertriebsdokument
Für technische Informationen, siehe die entsprechenden Anweisungen

FR

- Rayon de giration
- Nous consulter
- Équipements optionnels
- Levage
- Distribution
- Orientation
- Puissance requise
- Monophasé 50 Hz

Hauteurs sous crochet données moufle plaquée
Document commercial non contractuel
Pour toute information technique se référer à la notice correspondante

Giraffe Cranes
Dambroek 21
7223 DT Baak
The Netherlands

+31 (0)314 745 880

sales@giraffecranes.nl

© Giraffe Manufacturing B.V.

giraffecranes.nl

