



DATASHEET I 700.26-2WD4S

In operation / In Betrieb / En fonctionnement

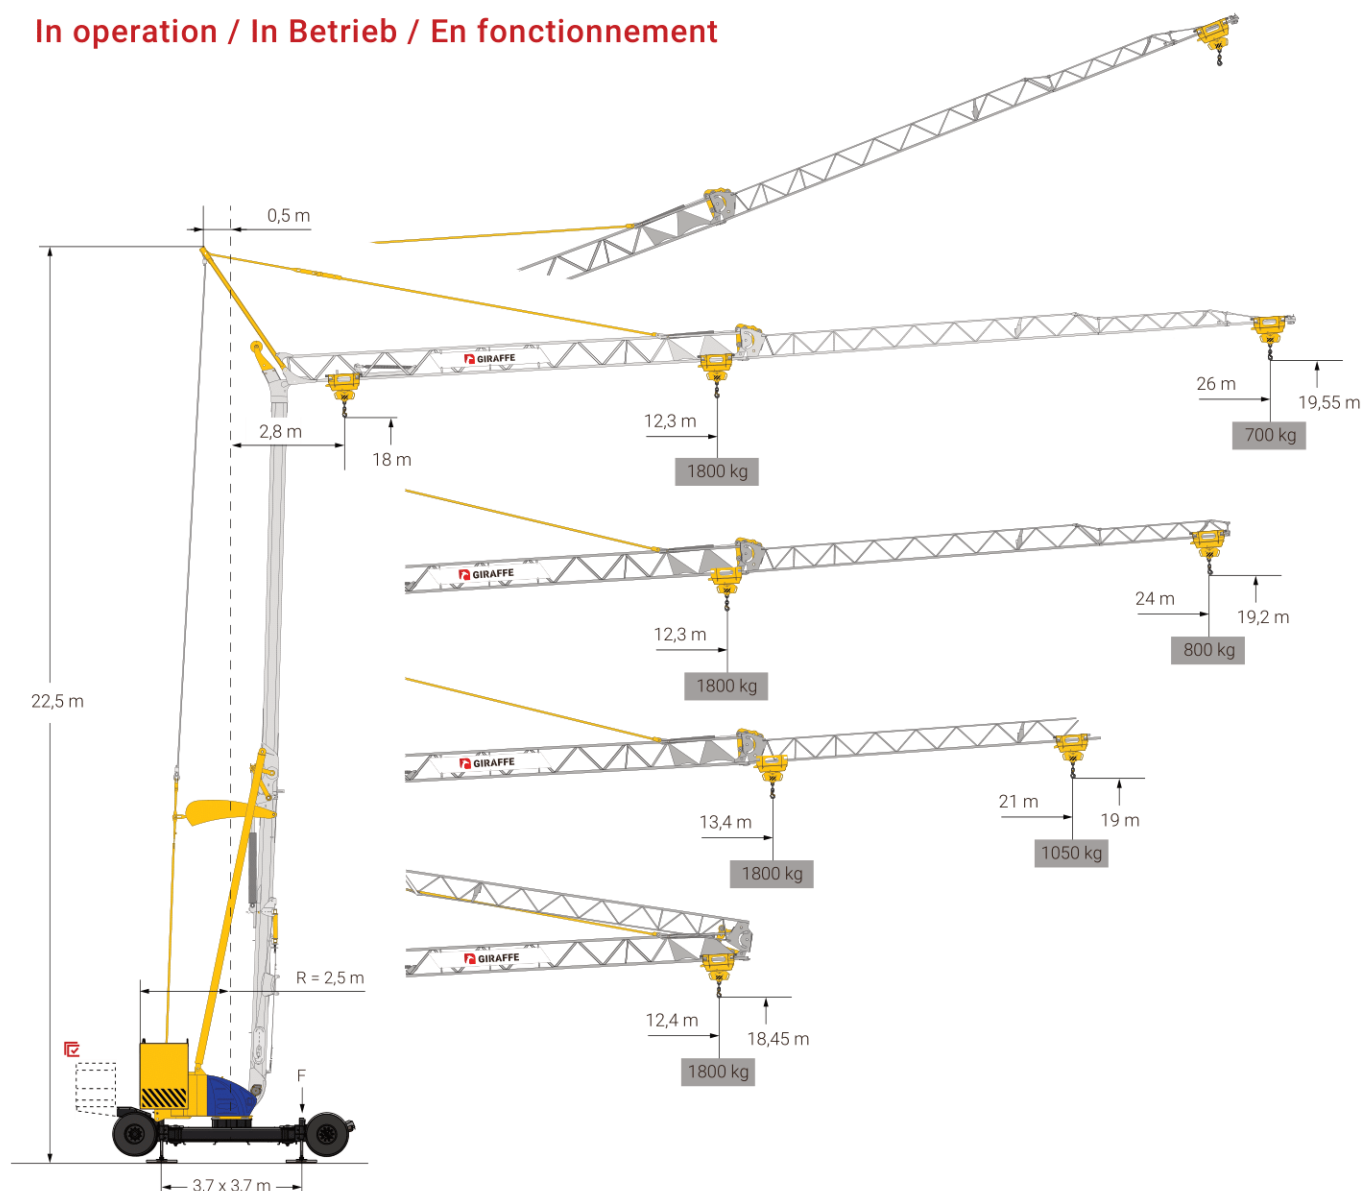


F	14 t
Crane	6100 kg
Wheel chassis	6650 kg
R: Steel ballast	9200 kg (2 x 4600 kg)
Total weight	21950 kg

Load curves / Lastkurven / Courbes de charges

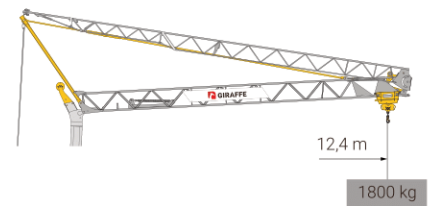


26 m	2,8	>	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	m
			1800	1630	1490	1370	1265	1175	1095	1025	965	910	860	815	775	735	700	kg
25 m	2,8	>	12,3	13	14	15	16	17	18	19	20	21	22	23	24	m		
			1800	1685	1535	1415	1310	1215	1135	1060	1000	940	890	845	800	kg		
21 m	2,8	>	13,4	14	15	16	17	18	19	20	21	m						
			1800	1710	1570	1455	1350	1265	1185	1115	1050	kg						


2,8	>	12,4	m
		1800	kg
2,8	>	12,4	m
		1800	kg
2,8	>	12,4	m
		1800	kg

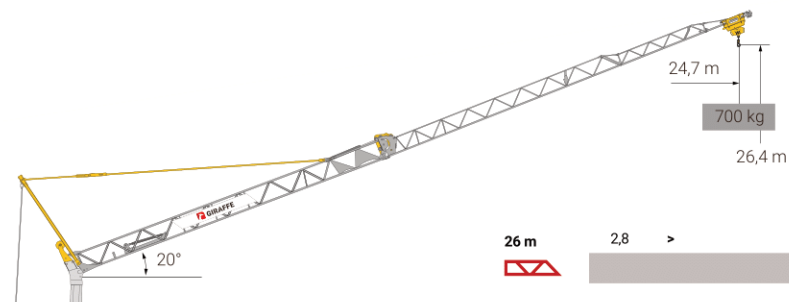

26 m	2,8	>	24,7	m
			700	kg

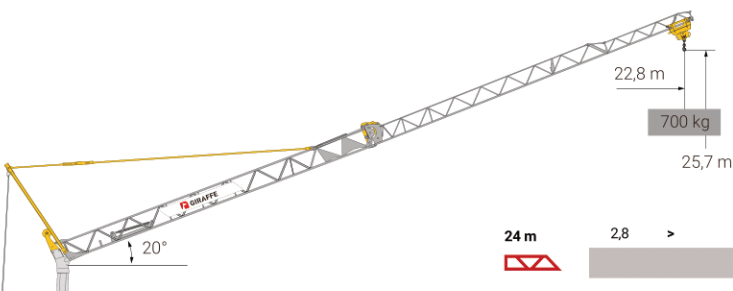

24 m	2,8	>	22,8	m
			700	kg

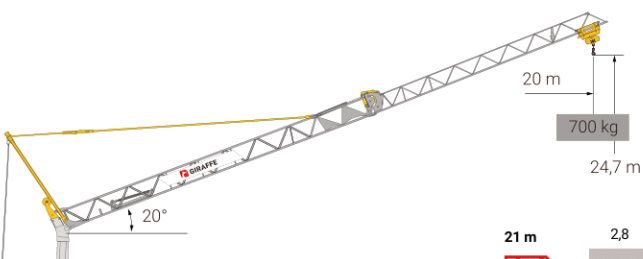




21 m	2,8	>	20	m
			700	kg

Mechanisms / Triebwerke / Mécanismes



230 V - 50 Hz 400 V - 50 Hz 380 V - 60 Hz								ch-PS hp	kW
	230 V  20 A 	m/min	↕ 3,5	↑ 5	↓ 12,5	↑ 11,5	↓ 39	3,3	2,4
		kg	1800	1800	700				
	230 V  32 A 	m/min	↕ 3,5	↑ 6,5	↓ 12,5	↑ 22	↓ 39	5,2	3,8
		kg	1800	1800	700				
	400 V 480 V 	m/min	↕ 3,5	↕ 12,5	↕ 39			7,5	5,5
		kg	1800	1800	700				
		m/min	14 -> 36 (0 -> 700 kg) 14 -> 28 (700 -> 1800 kg)					1,5	1,1
		tr/min U/min rpm	0 > 1					1,5	1,1
	400 V	m/min	10 - 20					11	8

	 IEC 60204-32	 kVA
crane / kran / grue	230 V (+10% -10%) 50 Hz 400 V (+10% -10%) 50 Hz 480 V (+6% -10%) 60 Hz	230 V 20 A : 4,6 kVA 230 V 32 A : 7,4 kVA 400 V / 480 V : 11 kVA
wheelchassis / radfahrwerk / châssis de roue	400 V (+10% - 10%) 50 Hz	10 kVA

Erection / Montage / Montage

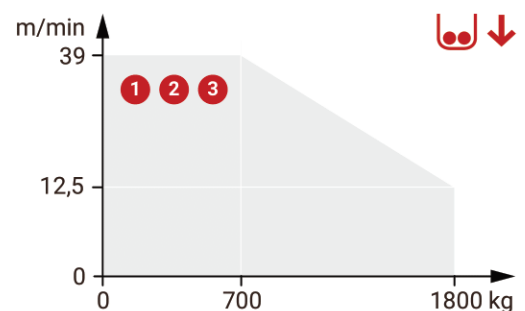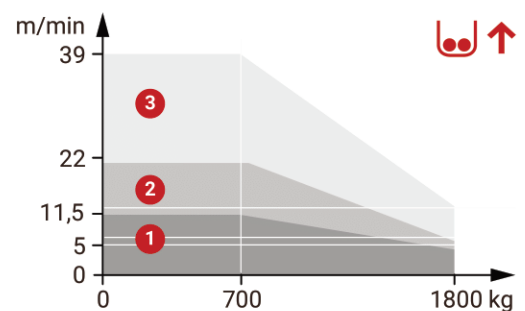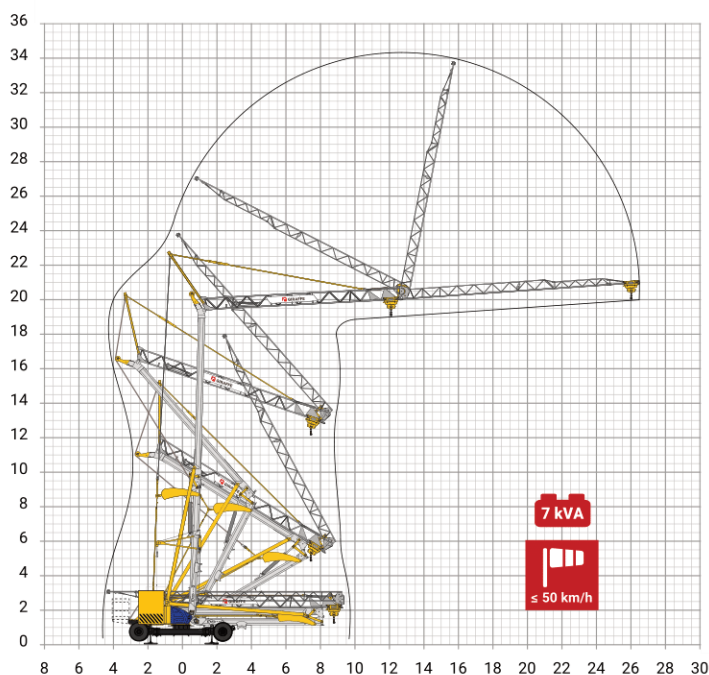

Moving / In Bewegung / En mouvement

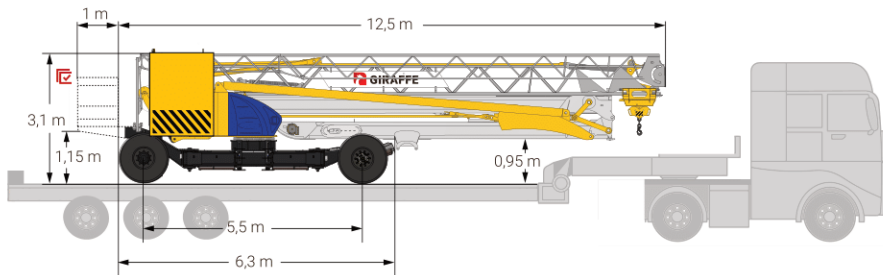

	0-10 m/min
	10-20 m/min



30%¹



12%

EN	DE	FR
 Rear slewing radius	Schwenk radius	Rayon de giration
 Consult us	Auf Anfrage	Nous consulter
 Options	Sonderausrüstungen	Équipements optionnels
 Hoisting	Heben	Levage
 Trolleying	Katzfahren	Distribution
 Slewing	Schwenken	Orientation
 Required power	Erforderliche Leistung	Puissance requise
 Single phase 50 Hz	Einphasige 50 Hz	Monophasé 50 Hz

	Hook heights given with plated pulley block	Hakenhöhen werden mit plattiertem Haken angegeben	Hauteurs sous crochet données moufle plaquée
	This commercial document is not legally binding	Unverbindliches Vertriebsdokument	Document commercial non contractuel
	For any technical information, please refer to the corresponding instructions	Für technische Informationen, siehe die entsprechenden Anweisungen	Pour toute information technique se référer à la notice correspondante

Giraffe Cranes
Dambroek 21
7223 DT Baak
The Netherlands

+31 (0)314 745 880

sales@giraffecranes.nl

© Giraffe Manufacturing B.V.

giraffecranes.nl

