

Technical sheet :

# 220 TJ-XP



 **MANITOU**  
HANDLING YOUR WORLD


| Capacities                              |         | Metric                                                                                                         |
|-----------------------------------------|---------|----------------------------------------------------------------------------------------------------------------|
| Working height                          | h21     | 21.74 m                                                                                                        |
| Platform height                         | h7      | 19.74 m                                                                                                        |
| Max. outreach                           |         | 17.78 m                                                                                                        |
| Pendular arm rotation (top / bottom)    |         | +70 ° / -63 °                                                                                                  |
| Platform capacity                       | Q       | 350 kg                                                                                                         |
| Turret rotation                         |         | 360 °                                                                                                          |
| Platform rotation (right / left)        |         | 90 ° / 90 °                                                                                                    |
| Number of people (indoor / outdoor)     |         | 3 / 3                                                                                                          |
| Weight and dimensions                   |         |                                                                                                                |
| Platform weight*                        |         | 13600 kg                                                                                                       |
| Platform dimensions (length x width)    | lp / ep | 2.30 m x 0.90 m                                                                                                |
| Floor height (access)                   | h20     | 0.39 m                                                                                                         |
| Overall length                          | l1      | 10.05 m                                                                                                        |
| Overall width                           | b1      | 2.48 m                                                                                                         |
| Overall height                          | h17     | 2.52 m                                                                                                         |
| Overall length (stowed)                 | l9      | 7.35 m                                                                                                         |
| Overall height (stowed)                 | h18 *** | 3.03 m                                                                                                         |
| Jib length                              | l13     | 2 m                                                                                                            |
| Counterweight Oversize / Reach          |         | 1.34 m                                                                                                         |
| External turning radius                 | Wa3     | 4.40 m                                                                                                         |
| Ground clearance at centre of wheelbase | m2      | 0.44 m                                                                                                         |
| Wheelbase                               | y       | 2.80 m                                                                                                         |
| Performances                            |         |                                                                                                                |
| Drive speed - stowed                    |         | 5.40 km/h                                                                                                      |
| Drive speed - raised                    |         | 1 km/h                                                                                                         |
| Gradeability                            |         | 40 %                                                                                                           |
| Permissible leveling                    |         | 4 °                                                                                                            |
| Wheels                                  |         |                                                                                                                |
| Tires type                              |         | Solid Tires Cured-On                                                                                           |
| Drive wheels (front / rear)             |         | 2 / 2                                                                                                          |
| Steering wheels (front / rear)          |         | 2 / 2                                                                                                          |
| Braking wheels (front / rear)           |         | 2 / 2                                                                                                          |
| Engine/Battery                          |         |                                                                                                                |
| Engine brand / model                    |         | Kubota - V1505.E3B                                                                                             |
| Engine norm                             |         | Stage IIIA                                                                                                     |
| I.C. Engine power rating / Power        |         | 35 Hp / 26.20 kW                                                                                               |
| Miscellaneous                           |         |                                                                                                                |
| Ground Pressure                         |         | 18.30 dan/cm2                                                                                                  |
| Hydraulic Pressure                      |         | 400 bar                                                                                                        |
| Hydraulic tank capacity                 |         | 94 l                                                                                                           |
| Fuel tank                               |         | 72 l                                                                                                           |
| Noise to environment (LwA)              |         | < 107 dB                                                                                                       |
| Vibration on hands/arms                 |         | < 0.50 m/s²                                                                                                    |
| Daily consumption **                    |         | 7.98 l                                                                                                         |
| Standards compliance                    |         |                                                                                                                |
| This machine is in compliance with:     |         | European directives: 2006/42/EC- Machinery (revised EN280:2013) - 2004/108/EC (EMC) - 2006/95/EC (Low voltage) |

\*Varies according to options and standards of the country to which the machine is delivered


\*\* According to "REDUCE cycle"

220 TJ-XP - Load chart

Load Chart for MEWP Metric

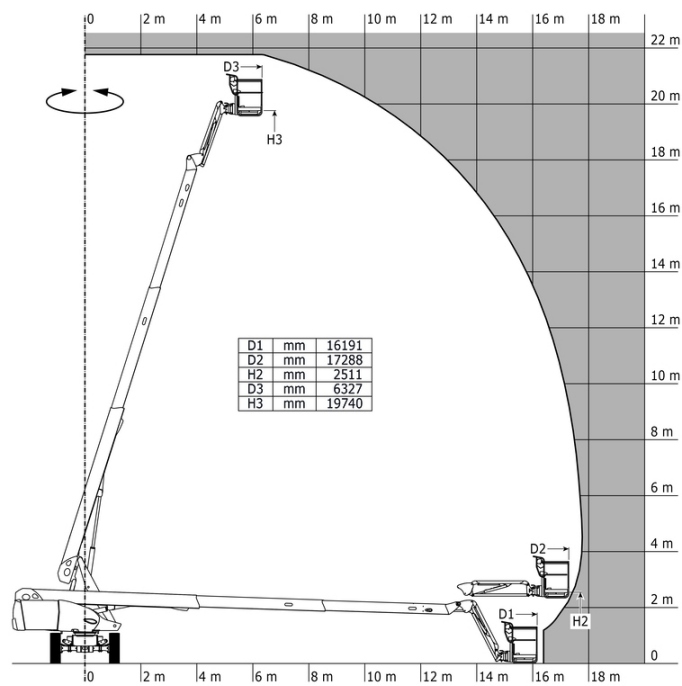

220 TJ-XP - Dimensional drawing

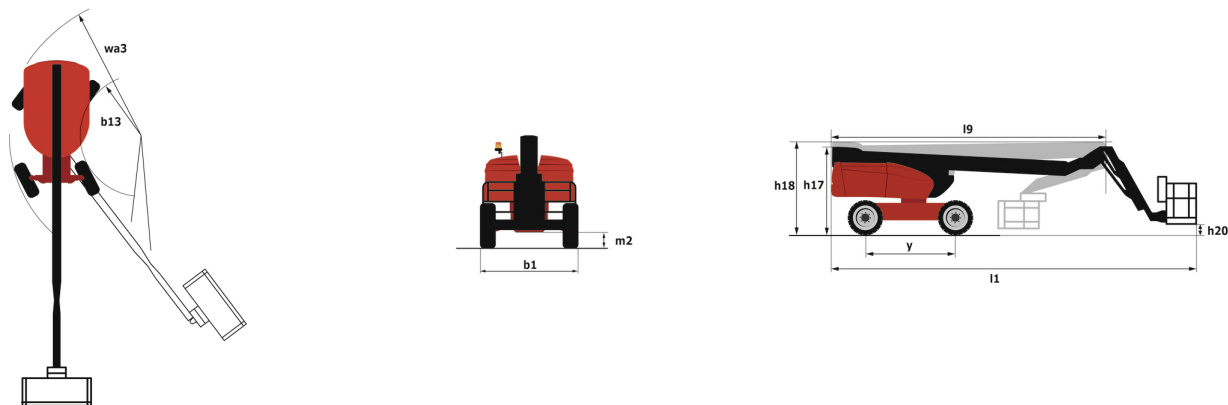

# Equipment

## Standard

230V Predisposition  
4 simultaneous movements  
4 wheel steer with crab mode  
Audible alarm and illuminated indicator lamp (leveling, overload, lowering)  
Backup electrical pump  
Continuous turret rotation  
Differential locking on rear axle  
Electronic platform compensation  
Emergency stop button in platform and on frame  
Engine mounted on sliding platform  
Fuel gauge with low level indicator  
Integrated diagnostic assistance  
Oscillating front axle  
Painted basket for heavy loads 2,300 mm (7ft 7 in.)  
Protective cover for control panel  
Remote control for transport

## Optional

110 or 230V plug with differential circuit breaker  
Additional storage boxes  
Basket 1,800 mm  
Battery cut-off  
Biodegradable oil  
Catalytic cleaner  
Cold weather protection oil  
Key lock on fuel tank  
Key lock on turret cover  
On-board generator (3,5 or 5 kW)  
Panel support kit  
SMS : Safe Man System  
Safety hamess  
Screen protection on the lower box control  
Spark arrester  
Special color paints  
Tube support kit  
Water predisposition  
Working light



**Head Office**

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes