

BULLETIN NUMBER: SB-0004

DATE: 16/08/2022

SUBJECT: External Implement Switch


INFORMATION ONLY

This is an information Bulletin advising the correct procedure to setup an External Implement Switch.

Switch Installation:

1. With a 3-wire Switch, connect as per the below diagram and dot points to the ISO-BUS IC38 Control Module on the front of the spreader:
 - a. J2.7 = 12 V+ supply
 - b. J2.8 = Signal
 - c. J2.9 = Ground supply


NOTE: J2 refers to the group number in the IC38 ISO-BUS module and 7 to 9 are the pin numbers as per the below diagram.

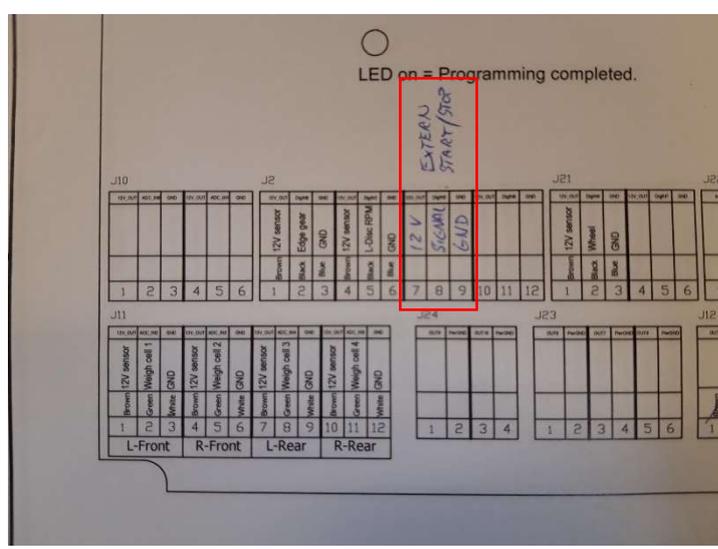

Setup Terminal:

Goto Implement Parameters and set the Implement on/off sensor to "External Switch".

(Main Menu > Machine > Implement Parameters)

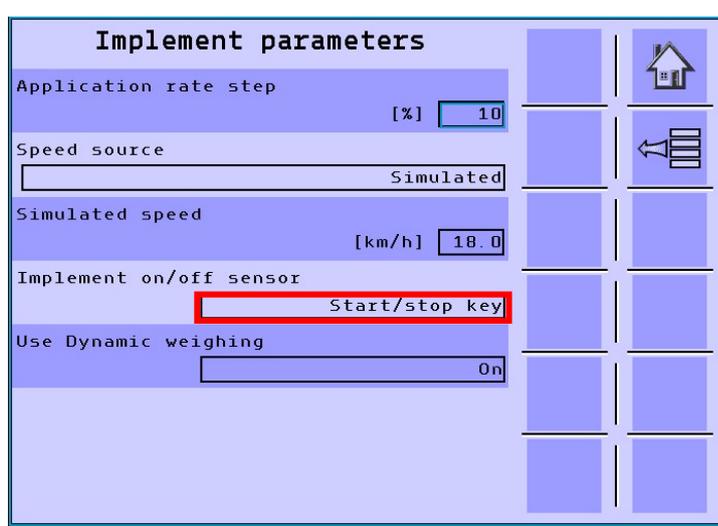

Any further support, please contact your Bredal Representative.