

DHD 1T
AISI 304
Submersible Pump
Vortex



Technical data

Pump:

Material: AISI 304
Double mechanical shaft seal:
- Pump side; SiC/SiC/NBR
- Motor side; NBR Lipseal
Impeller type: Vortex open impeller
Max. passage: Ø 30 mm
Connection: 1½" female thread
Max. liquid temperature: 50°C
Max. immersion depth: 5 m
Weight: 10.3 kg

Motor:

Voltage: 400 v, 50 Hz 3phase
Power: 0,55 kW
Maximum current: 1,4 A
Speed: 2850 rpm
Protection class: IP68
Cable length: 10 m with plug
Insulation class: F



Suitable for continuous use (if sufficiently submerged)
Equipped without float switch

Applications:



Dirty water




Industry




Hobby


Dimensions

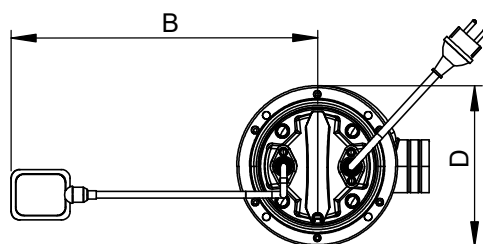

Character	B	C	D	DN1	H	H1
mm	500	209	170	1,5"	429	85

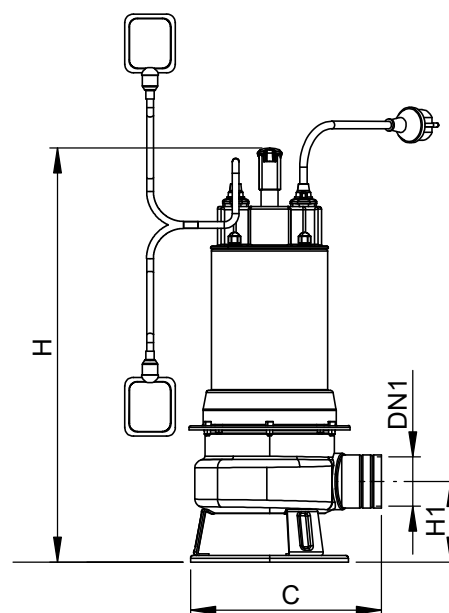

Curves

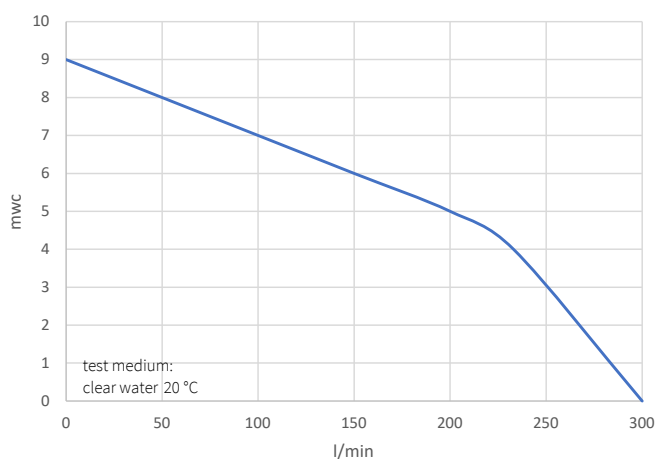

Q max

l/min	0	50	100	150	200	233	300
m³/h	0	3	6	9	12	14	18
Type of pump	head in mwc						
DHD 1T	9	8	7	6	5	4	-

Article number:
EAN-code:

KDE2420T
8719033640238