

# METER-RITE®

Grade-Level Double-Throw / Meter Socket Combo Unit, Unfused

Catalog Number P-7215MS(\*)

NEMA 3R Rainproof Enclosure 240 Vac

This Combination Double-Throw Switch/Meter Socket Unit is  
"SUITABLE FOR USE ONLY AS SERVICE EQUIPMENT".

Note: (\*) = H for Horn Bypass

(\*) = L for Lever Bypass

Pedestal Mount

Schematic for Cat. Nos.

P-7215MSL & P-7215MSH

RONK ELECTRICAL INDUSTRIES, INC.  
NOKOMIS, ILLINOIS

Drawing Number

2-6110


Scale None

Drawn NCL

Date 2/1/2022

Approved NCL

TIGHTENING TORQUE	
SOCKET SIZE (INCH)	TORQUE (IN-LB)
1/8	45
5/32	100
3/16	120
7/32	150
1/4	200
5/16	250
3/8	375
1/2	500
9/16	600

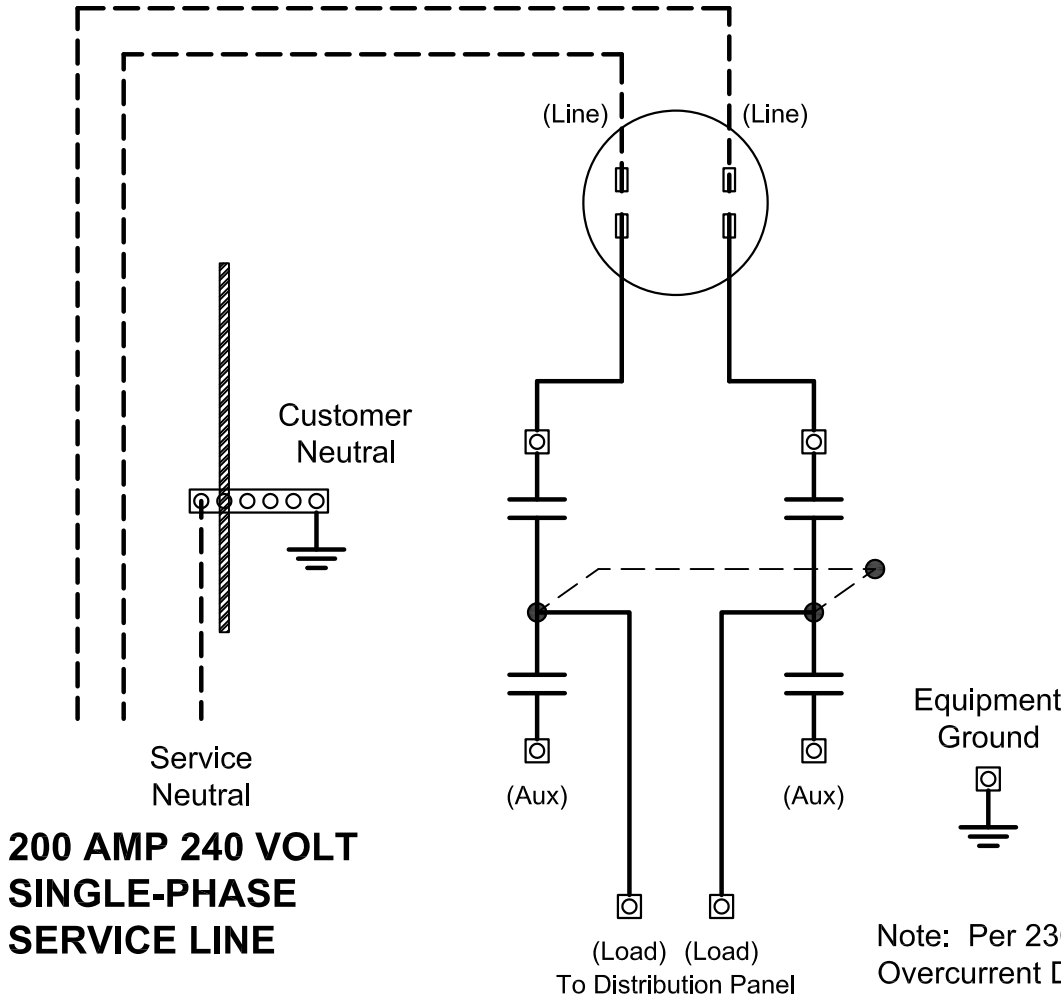

Note: Per 230-91, when the Service Overcurrent Device is not an integral part of the Service Disconnecting Means, it "shall be located immediately adjacent thereto".

SERVICE CONNECTIONS		CUSTOMER CONNECTIONS		
LINE LUGS	NEUTRAL	NEUTRAL	LOAD LUGS	AUXILIARY LUGS
350 MCM - #6 CU-AL (LAY-IN TERMINAL)	350 MCM - #6 CU-AL (1-HOLE)	350 MCM - #6 CU-AL (4-HOLE BAR)	250 MCM - #6 CU-AL (4-HOLE LUG)	250 MCM - #6 CU-AL (1-HOLE LUG)

USE COPPER WIRE RATED 75° C FOR AUXILIARY AND LOAD CONNECTIONS.

**WARNING:** ALL ADJUSTMENTS ON SWITCH HAVE BEEN MADE AT FACTORY AND MUST NOT BE CHANGED IN THE FIELD.

Revision Description  
Updated switch Catalog Numbers.

Rev CN

Date 2/3/2023

BY NCL

A