




Din Rail Fiber Optic Terminal Box – 12 Port

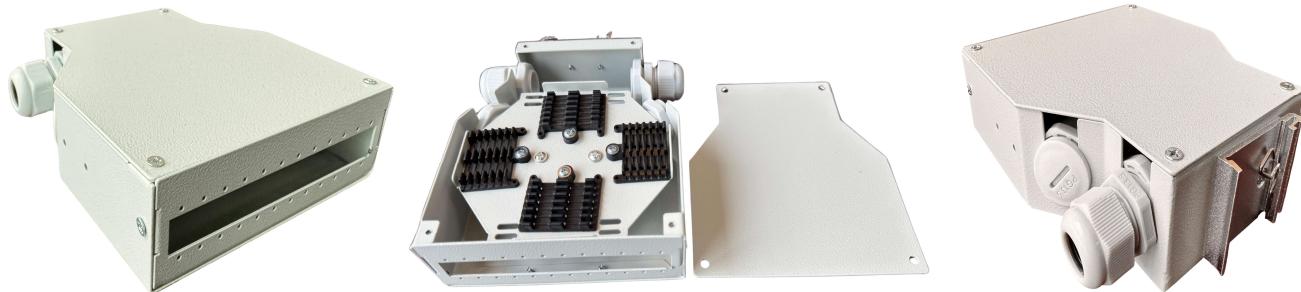

Description:

Techlogiks DIN Rail Fiber optic terminal box is available for the distribution and terminal connection for various kinds of optical fiber systems, especially suitable for mini-network terminal distribution, in which the optical cables, patch cores, or pigtails are connected.

Feature:

- Cold rolled steel
- Suitable for different adapters: SC, LC ...
- 4pcs cable entry/exit ports
- Splicing module of 24 fibers inside
- Max. 12 pcs Adapters can be loaded

Application:

- Suitable for Pigtail, ribbon, and bunch cable connect distribution
- Used for Din Rail Mounting Application
- Used in FTTH, Telecommunications, CATV etc.

**Specifications:**

| Specifications | |
|-----------------------------|------------------------|
| Dimensions | 130x140x40 mm |
| Material | Cold rolled steel |
| Material Coating | Powder Coating |
| Thickness | 1.1mm |
| Adaptor Type | SC Simplex / LC Duplex |
| Maximum adaptor position | 12 |
| No. of cable entries/Exists | 4 Pcs |
| Cable glands | 2, PG 13.5 |
| Mounting type | Din Rail |
| Temperature Range | -20~75 Degree C |
| Color | Grey |
| Weight | 0.6 Kg |
| IP Rate | IP 20 |

Ordering Information

| Part Number | Description |
|--------------------|--|
| TL-FTB-DIN-12-SCSX | 12 Fibers SC Simplex Port Din Rail Mounted Unloaded Fiber Optic Terminal Box, IP20 |