


Wi-Fi 6 Dual Band 2x2:2 Indoor Wall Plate Access Point ion4xi_WP

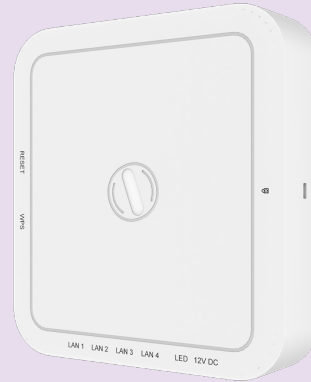

High Capacity Dual-Band Access Point

ion4xi_WP is a centrally managed 2x2:2 MU-MIMO Wi-Fi 6 certified Access Point with a sleek and aesthetic design that raises the bar for wireless performance and efficiency. Designed especially for the hospitality industry, the Wall Plate Access Point ensures high speeds, great network coverage & ultra-secure connectivity. ion4xi_WP is ideal for most demanding use cases and high-performance intensive applications like high-definition videos & high bandwidth requirements thereby ensuring enhanced user and guest experience.

Overview

- 802.11 a/b/g/n/ac/ax
- Max power up to 23 dBm, combined with high-performance integrated omnidirectional antennas
- 1.78 Gbps aggregate data rate
- Managed via cloud or on-premise controller
- 2X2:2 MU-MIMO
- Tailored for hospitality/campus/dormitory

Enterprise Grade Capabilities

- Captive Portal and AAA Integration
- Voucher Management; Web Self-care
- Advanced Policy Control
- Wi-Fi Network & Performance Analytics
- Hotspot 2.0 support
- URL/IP Filtering
- MAC ACL Support

TECHNICAL SPECIFICATIONS

**Dual-band radio offering peak data rate of up to 1.78 Gbps**

The concurrent dual-band radio inside ion4xi_WP offers a combined peak data rate of 1.78 Gbps with up to 1202 Mbps in the 5 GHz band and 574 Mbps in the 2.4 GHz band. Technologies, like transmit beamforming and enhanced receiver sensitivity, allow the ion4xi_WP to support a higher client density resulting in better performance for more clients connected to Access Point.

**Enhanced user experience**

ion4xi_WP is a cloud-managed 2x2:2 MU-MIMO Wi-Fi 6 certified Access Point with a sleek and aesthetic design that raises the bar for wireless performance and efficiency. Designed especially for the hospitality industry, the Wall Plate Access Point ensures high speeds, great network coverage & ultra-secure connectivity.

**Better Mesh Networking**

Eliminating the need for expensive cabling, Access Points automatically form a wireless mesh and provide connectivity in every possible corner. With self-healing and self-optimization functionality, in case of a mesh node failure, the surrounding nodes automatically re-connect and resume service. Support for EasyMesh means that ion4xi_WP is interoperable with third-party EasyMesh compliant Access Points and/or Routers and can quickly be deployed as a standalone or converged with the existing network. This eliminates the need for locking in with a single vendor, driving down the total cost of ownership of the network.

**Traffic shaping & Application aware**

The ion4xi_WP includes a traffic control engine which enables URL/IP filtering. Sophisticated QoS policies can also be configured at network, SSID and user level.

**Advanced security features**

The ion4xi_WP comes with WPA3 - the latest Wi-Fi security standards and an integrated WIDS/WIPS engine, offering more security from hacker attacks. It builds a security shield so hackers cannot crack off-site, brute-force, dictionary-based cracking attempts. Advanced security features such as AES hardware-based encryption and Enterprise authentication with 802.1X and Active Directory integration provide wired-like security while still being easy to configure. One-click client isolation provides secure, Internet-only access for visitors.

**Improved Battery Life**

ion4xi_WP has features like Unscheduled Automatic Power Save Delivery (U-APSD) and Target Wake Time (TWT) that enable devices such as smartphones and laptops to determine when and how frequently they will communicate with the Access Point. Benefits of these features are multifold such as an increased sleep time for the device, less consumption of battery and bandwidth, optimized spectral efficiency for IoT devices by reduction in overlaps and conflicts.

**Self- Configuring, Self- Maintaining and Always up to date**

Once plugged in, the AP can be configured remotely via cloud network management. It uploads firmware upgrades, new features, bug fixes, etc., automatically. The Access Point comes with dual firmware support enabling ion4xi_WP to be automatically booted with the backup firmware during any software malfunction, ensuring minimal downtime.

TECHNICAL SPECIFICATIONS



Wireless

Wi-Fi Standards	802.11a/b/g/n/ac/ax
Radio Mode	2x2 MU-MIMO with 2 spatial streams
Radio Frequency Band	Supported frequency bands (country-specific restrictions apply): • 2.4000 GHz to 2.4835 GHz • 5.150 GHz to 5.250 GHz • 5.250 GHz to 5.350 GHz • 5.470 GHz to 5.725 GHz • 5.725 GHz to 5.875 GHz
Peak Data Rate	Up to 1.78 Gbps (1202 Mbps for 5 GHz and 574 Mbps for 2.4 GHz)
Receiver Sensitivity	-96 dBm (for MCS 0)
Max Transmit Power	20 dBm for 2.4 GHz 23 dBm for 5 GHz
Channel Size	20/40/80 MHz
Modulation Schemes	Support up to 1024 QAM
User Support	256 concurrent client support
Power	802.3af/at PoE Input 12V DC Powered Adapter (optional)
Max Power Consumption	15 W
Interface	• 1 x 10/100/1000/2500 Base-T Ethernet (WAN & PoE-in) • 4x10/100/1000 Base-T Ethernet (LAN) • Reset and WPS buttons
Antenna	Integrated Omni-directional Antennas
Antenna Gain	3.5 dBi on 2.4 GHz and 5 dBi on 5 GHz

Certifications

Certifications	• FCC Class B, C • Wi-Fi Certified Passpoint 3.0 • Wi-Fi Certified 6 • Wi-Fi Enhanced Open™ • Wi-Fi Agile Multiband™
----------------	--

High Level Features

- WAN Protocols: Static IPv4/v6, DHCP client v4/v6
- Band Steering, Load Balancing
- EasyMesh Support
- Auto Channel Selection
- 8 SSIDs per radio (16 Combined)
- Intelligent RF control plane for self-healing & self-optimization
- Ability to simultaneously serve clients and monitor the RF environment
- Radio Resource Management for power and channel
- Management: Managed via cloud or on-premise controller
- QoS 802.11e WMM
- 802.11k/v/r support for fast roaming and handover
- Rate Limiting per SSID
- Maximal ratio combining (MRC)
- 802.11w- Protected Management Frames (PMF) support
- Non Wi-Fi interference detection
- Support for ATPC, coverage hole detection & correction
- Advanced Power Save (U-APSD)
- Support for integration with Captive Portal and AAA servers
- Supports advanced features like MAC authentication, VLAN pooling, MPSK, DPSK, Q-in-Q, etc.
- Advanced AI-based analytics

Physical and Environmental


Dimensions	163 x 150 x 38 mm
Weight	0.59 kg
Mounting	Wall mounting
Visual Indicators	LEDs for status and power indication
Operating Temperature	0°C to 45°C
Physical Security	Via Kensington lock port

Safety & Other Compliances


- RoHS 3.0
- Safety standard as per IEC/EN 62368/IEC60950 & IEC 60215
- Electrostatic Discharge Immunity as per IEC 61000-4-2, Contact L2 and Air Discharge, L3 Level
- DC Surge Immunity as per IEC 61000-4-5, Level 2 (power port + signal port)
- Electrical Fast Transient/Burst Immunity as per IEC 61000-4-4, Level 2
- Radiated susceptibility as per IEC 61000-4-3 Level 2
- Conducted Susceptibility as per IEC 61000-4-6, Level 2
- Bump and vibration as per QM333
- Radiated Emission as per CISPR 32 Class B
- Conducted Emission as per CISPR 22 Class B (power port + signal port)
- Voltage Variation: AC - as per IEC 61000-4-11 and DC - as per IEC 61000-4-29

Antenna Radiation Pattern

2.4 GHz Antenna Radiation Pattern

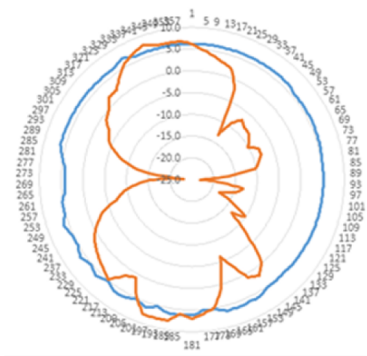

5 GHz Antenna Radiation Pattern

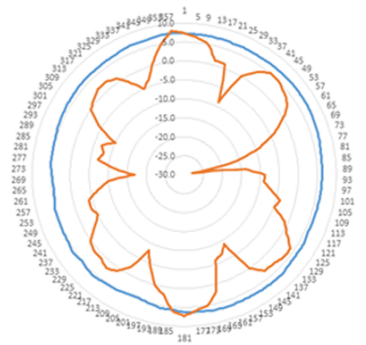

Security

- WPA3-Enterprise, WPA3-Enterprise Transition Mode, WPA3-Enterprise SuiteB (192-bit), WPA3-Personal, WPA3-Personal Transition Mode, Enhanced Open (OWE)
- WPA2-Enterprise, WPA2-Personal (PSK), WPA2-Personal Mixed Mode, WPA-Personal (PSK), WEP
- 802.1X Authentication (EAP-TLS, EAP-TTLS/MSCHAPv2, PEAPv0/EAP-MSCHAPv2, EAP-SIM)
- Dynamic Multi-PSK, Static Multi-PSK
- VPN pass-through
- IP/URL Filtering
- Layer 2 Tunneling Protocol (EoGRE)
- Client isolation support
- Captive portal and guest accounts
- Rogue access point detection and prevention (WIDS & WIPS)
- Hidden SSID in beacons
- MAC address authentication
- X.509 digital certificates
- Support for locally-significant certificates using Public Key Infrastructure (PKI)

Ordering Information

Model No.	Description
ion4xi_WP	io Wi-Fi 6 Dual Band 2x2:2 Indoor Wall Plate Access Point with Integrated Antenna (5 dBi)

Last Updated March 31, 2025



Email: iosupport@hfcl.com
Website: hfcl.com | io.hfcl.com
Office: 8, Commercial Complex, Masjid Moth, Greater Kailash II, New Delhi 110048