

Wi-Fi 6

Dual Band 2x2:2

Outdoor Access Point

ion4x / ion4x_2 / ion4x_3 / ion4x_ext /
ion4x_2_ext / ion4x_3_ext



ion4x series is a cloud managed 2x2:2 MU-MIMO Wi-Fi 6 certified Access Point that raises the bar for wireless performance and efficiency. With the combination of cloud management, high performance hardware and advanced software features, it is ideal for most demanding use cases and high performance intensive applications like high definition videos, AR/VR, etc.

Overview

- Dual band radio offering peak data rate of up to 1.78 Gbps
- 1024 concurrent client support
- Up to 30 dBm transmit power
- Bi-Directional, Multi-user, Multiple Input Multiple Output (MU-MIMO)
- 2X2:2 MU-MIMO
- EasyMesh Certified
- IP67 certified to withstand extreme weather conditions
- Centralized or standalone management options
- Serves various use cases with multiple integrated directional antenna options
 - 8 dBi gain for ion4x / ion4x_ext
 - 14 dBi gain for ion4x_2 / ion4x_2_ext
 - 13 dBi gain for ion4x_3 / ion4x_3_ext

Applications

- Outdoor stadiums & Industrial Belts
- Public Venues
- High Foot Traffic Areas
- Transportation (Airport/ Railways)
- Outdoor Resorts
- Transit Stations
- Smart city
- Telco offload
- Other arenas with demanding wireless requirements due to high client density, high density Outdoor hotspot environments

ion4x / ion4x_2 / ion4x_3 / ion4x_ext /
ion4x_2_ext / ion4x_3_ext

UNMATCHED PERFORMANCE



Dual band radio offering peak data rate of up to 1.78 Gbps

The concurrent dual band radio inside ion4x series offers a combined peak data rate of 1.78 Gbps with up to 1202 Mbps in the 5 GHz band and 574 Mbps in the 2.4 GHz band. Technologies like transmit beamforming and enhanced receiver sensitivity allow the ion4x to support a higher client density resulting in better performance for more clients connected to each Access Point.



Bi-Directional, Multi-user, Multiple Input Multiple Output (MU-MIMO)

The Access Point offers MU-MIMO and OFDMA for transmission that is more efficient to multiple clients. This is especially suited for environments with numerous varied devices, with each supporting latest or legacy Wi-Fi standards. MU-MIMO enables multiple clients to transmit and receive data simultaneously. This increases the total network performance and improves the end user experience.



EasyMesh Networking

Eliminating the need for expensive cabling, Access Points automatically form a wireless mesh, and provides connectivity in every possible corner. With self-healing and self-optimization functionality, in case of a mesh node failure, the surrounding nodes automatically re-connect and resume service without downtime. Support for EasyMesh means that it is interoperable with third party Access Points and/or Routers and can quickly be deployed as standalone or converged with the existing network. This eliminates the need for locking-in with a single vendor, driving down the total cost of ownership of the network.



Better Coverage with Integrated Antenna

Transmit power of up to 30 dBm along with integrated antenna gain of 8 dBi (ion4x/ion4x_ext), 14 dBi (ion4x_2/ion4x_2_ext) and 13 dBi (ion4x_3/ion4x_3_ext) helps transmit data to a larger coverage. This ensures more clients can be connected at far off places.



Higher security & Guest Access

The ion4x series comes with WPA3 - the latest Wi-Fi security standards, offering more security from hacker attacks. It builds a security shield so hackers cannot crack off-site, brute-force, dictionary-based cracking attempts. Integrated, easy-to-use security provides secure connectivity for employees and guests alike. Advanced security features such as AES hardware-based encryption and Enterprise authentication with 802.1X and Active Directory integration provide wired-like security while still being easy to configure. One-click guest isolation provides secure, Internet-only access for visitors.



Improved Battery Life

Unscheduled automatic power save delivery (U-APSD) and Target Wake Time (TWT) feature enables devices such as smartphones and laptops to determine when and how frequently they will communicate with the Access Point. Benefits of these features are multifold such as an increased sleep time for the device, less consumption of battery and bandwidth, optimized spectral efficiency for IoT devices by reduction in overlaps and conflicts.



Centralized Control

Centralized management of the entire network on our highly intuitive, flexible, and scalable cloud network manager. It provide the flexibility to distribute the network, allocate varying bandwidths, manage, track, troubleshoot, configure, communicate, and enforce policies on all Access Points in the network. The controller has in-built analytics and reporting capabilities to gain insight into usage patterns.

ion4x /
ion4x_ext



ion4x_2 / ion4x_2_ext



ion4x_3 / ion4x_3_ext



TECHNICAL SPECIFICATIONS

Wireless

Wi-Fi Standards	802.11a/b/g/n/ac/ax
Radio Mode	2x2 MU-MIMO with 2 spatial streams
Radio Frequency Band	Supported frequency bands (country-specific restrictions apply) : • 2.40 GHz to 2.4835 GHz • 5.150 GHz to 5.250 GHz • 5.250 GHz to 5.350 GHz • 5.470 GHz to 5.725 GHz • 5.725 GHz to 5.875 GHz
Peak Data rate	Up to 1.78 Gbps (1202 Mbps for 5 GHz and 574 Mbps for 2.4 GHz)
Receiver Sensitivity	-97 dBm (for MCS 0)
Max Transmit Power	30 dBm for 2.4 GHz , 30 dBm for 5 GHz (will depend on country-specific guidelines)
Channel Size	20/40/80 MHz
Modulation Schemes	Supports upto 1024 QAM
User Support	1024 clients per Access Point (512 clients per radio)
Power	IEEE 802.3at PoE/PoE+
Max Power Consumption	17 W (approx.)
Interface	1 X 10/100/1000 Base-T Ethernet 1 X 2500 Base X Optical Ethernet SFP
Antenna	Integrated directional antennas with • 70° ± 5°H & 70° ± 5°V beamwidth (ion4x/ion4x_ext) • 60° ± 2°H & 15° ± 1°V beamwidth (ion4x_2/ion4x_2_ext) • 45° ± 2°H & 27° ± 2°V beamwidth (ion4x_3/ion4x_3_ext)
Antenna Gain	• 8 dBi for 5 GHz, 8 dBi for 2.4 Ghz (ion4x/ion4x_ext) • 14 dBi for 5 GHz, 14 dBi for 2.4 Ghz (ion4x_2/ion4x_2_ext) • 13 dBi for 5 GHz, 13 dBi for 2.4 GHz (ion4x_3/ion4x_3_ext)

High Level Features

- WAN Protocols: Static IPv4/v6, DHCP client v4/v6
- Band Steering, Load Balancing, EasyMesh Support
- Auto Channel Selection
- Intelligent RF control plane for self-healing & self-optimization
- Ability to simultaneously serve clients and monitor RF environment
- Radio Resource Management for power and channel
- Management: Standalone (via GUI) or through on-premise based solution or Cloud-based
- 16 SSIDs per Radio (32 combined)
- QOS 802.11e WMM
- 802.11k/v/r support for fast roaming and handover
- Maximal ratio combining (MRC)
- 802.11w- Protected Management Frames (PMF) support
- Non Wi-Fi interference detection
- Support for ATPC, coverage hole detection & correction
- Advanced Power Save (U-APSD), VOIP Support
- Sensor Mode: The AP can be configured to operate as dedicated sensor for WIDS and WIPS.
- Client Emulation Mode: AP can be configured as a client for emulating end user devices and performing client connectivity and performance tests.

Physical and Environmental

Dimensions	• 182 X 182 X 89 mm (ion4x/ion4x_ext) • 375 X 215 X 89 mm (ion4x_2/ion4x_2_ext) • 310 x 310 x 85 mm (ion4x_3/ion4x_3_ext)
Weight	1.12 kg (ion4x/ion4x_ext) 1.66 kg (ion4x_2/ion4x_2_ext) 1.66 kg (ion4x_3/ion4x_3_ext)
Mounting	Wall and Pole Wall Mounting Weight: 0.5 kg Pole Mounting Weight: 0.3 kg
Visual Indicators	RF and Power LEDs
Outdoor Ingress Protection Rating	IP67
Humidity	5 to 95% (non-condensing)
Operating Temperature	• -15°C to 60°C (ion4x/ion4x_2/ion4x_3) • -40°C to 60°C (ion4x_ext/ion4x_2_ext/ion4x_3_ext)
Wind Sustainability	150 km/hour (sustained winds)

Certifications

Certifications	• RoHS 3.0 • FCC Class A, CE, • Wi-Fi Certified Passpoint 2.0 • Wi-Fi Certified 6 • Wi-Fi Certified EasyMesh • Wi-Fi Certified WPA3
-----------------------	---

Safety & Other Compliances

- Safety standard as per IEC/EN 62368/IEC60950 & IEC 60215
- Electrostatic Discharge Immunity as per IEC 61000-4-2, Contact L2 and Air Discharge, L3 Level
- DC Surge Immunity as per IEC 61000-4-5, Level 2 (power port + signal port)
- Electrical Fast Transient/Burst Immunity as per IEC 61000-4-4, Level 2
- Radiated susceptibility as per IEC 61000-4-3 Level 2
- Conducted Susceptibility as per IEC 61000-4-6, Level 2
- Bump and vibration as per QM333
- Radiated Emission as per CISPR 32 Class B
- Conducted Emission as per CISPR 22 Class B (power port + signal port)
- Voltage Variation: AC - as per IEC 61000-4-11 and DC - as per IEC 61000-4-29


Security

- 802.11i, 802.1x / EAP, Hidden SSID, EAP Type (EAP-TLS, EAP-TTLS/MSCHAPv2, PEAPv0/EAP-MSCHAPv2, EAP-SIM), Protected Management Frames (PMF), WPA (Personal, Enterprise), WPA2 (Personal, Enterprise), WPA3 (Personal, SAE, OWE, Enterprise and SuiteB; including 192-bit security and R2 for Fast roaming)
- VPN pass-through
- IP/URL Filtering
- Layer 2 Tunneling (EoGRE)
- Flexible guest access with device isolation
- Captive portal and guest accounts
- Rogue access point detection and prevention (WIDS & WIPS)
- Hidden SSID in beacons
- MAC address authentication
- X.509 digital certificates
- Support for locally-significant certificates using Public Key Infrastructure (PKI)


Antenna Radiation Pattern

ion4x

2.4 GHz Antenna Radiation Pattern

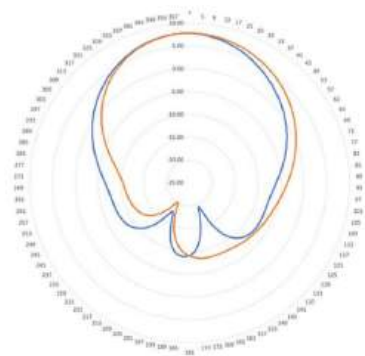


5 GHz Antenna Radiation Pattern

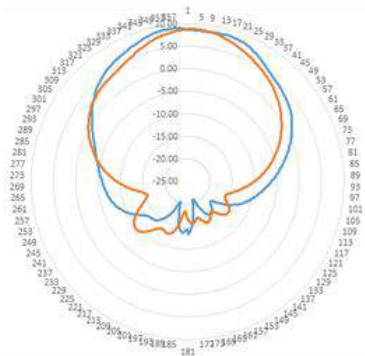


ion4x_2

2.4 GHz Antenna Radiation Pattern

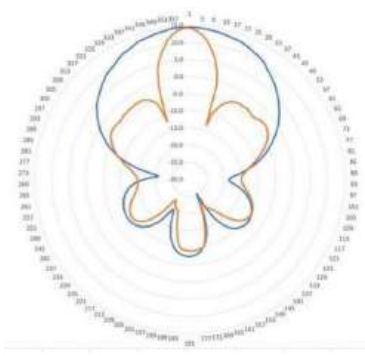


5 GHz Antenna Radiation Pattern

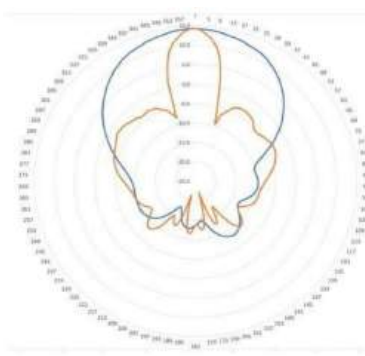


ion4x_3

2.4 GHz Antenna Radiation Pattern

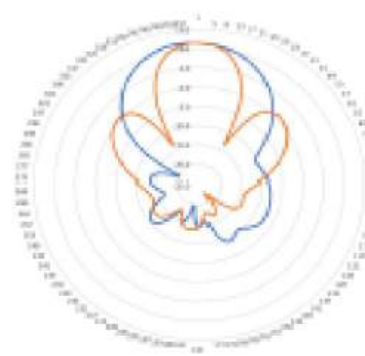

5 GHz Antenna Radiation Pattern

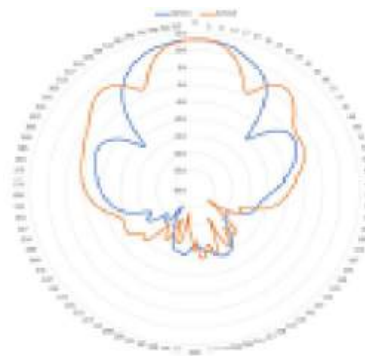

Ordering Information

Model No.	Description
ion4x	io Wi-Fi 6 Dual Band 2x2:2 Outdoor Access Point with Integrated Antenna (8 dBi)
ion4x_2	io Wi-Fi 6 Dual Band 2x2:2 Outdoor Access Point with Integrated Antenna (14 dBi)
ion4x_3	io Wi-Fi 6 Dual Band 2x2:2 Outdoor Access Point with Integrated Antenna (13 dBi)
ion4x_ext	io Wi-Fi 6 Dual Band 2x2:2 Outdoor Access Point with Integrated Antenna (8 dBi) [extended temperature]
ion4x_2_ext	io Wi-Fi 6 Dual Band 2x2:2 Outdoor Access Point with Integrated Antenna (14 dBi) [extended temperature]
ion4x_3_ext	io Wi-Fi 6 Dual Band 2x2:2 Outdoor Access Point with Integrated Antenna (13 dBi) [extended temperature]

Disclaimer: HFCL, IO by HFCL, and their respective logos are trademarks and/or registered trademarks of HFCL Limited. HFCL Limited assumes no responsibility for any inaccuracies in this document and reserves the right to revise or transfer this document without notice. All other trademarks, service marks, registered marks, or registered service marks mentioned herein are the property of their respective owners.

Last Updated August 12, 2024



Email: iosupport@hfcl.com

Website: hfcl.com | io.hfcl.com

Office: 8, Commercial Complex, Masjid Moth, Greater Kailash II, New Delhi 110048