

Spec Sheet

Effluent Pump



20 Series

Intake: **Bottom-Suction**
Rated Flow: **20GPM**
Rated Voltage: **115V**

Dimensions

W. 3.87in


H. 20.78in

D. 3.87in



Scan for More

Curve Chart

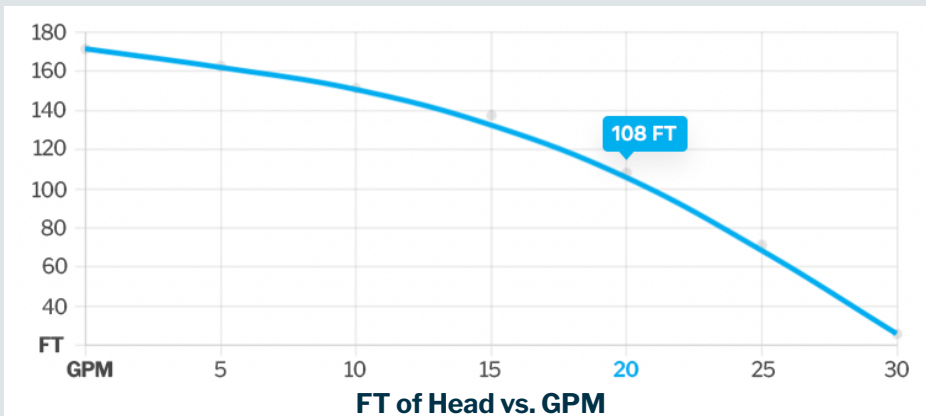

Designed to be used in septic effluent and cistern pumping where maximum draw down is needed. Built using 304 stainless steel and high-wear life thermoplastic components to ensure corrosion resistance and longevity.

Key Features:

3 Year Warranty effective from the sale date for pro customers. (contact us for full warranty terms and details)

Specs:

Discharge Diameter:	1.25 inches
Solid Handling Capability	Up to 1 /8-inch without issues.
Housing Material	High-Grade 304 stainless steel
Power Cord	Heavy-Duty 10 ft SJOW jacketed cord
Motor Size	1/2HP
Certifications	NSF 61 Approved