



## 30 Series

Intake: **Bottom-Suction**  
 Rated Flow: **30GPM**  
 Rated Voltage: **115V**

## Dimensions

W. 3.87in


H. 20.78in

D. 3.87in



Scan for More

## Curve Chart

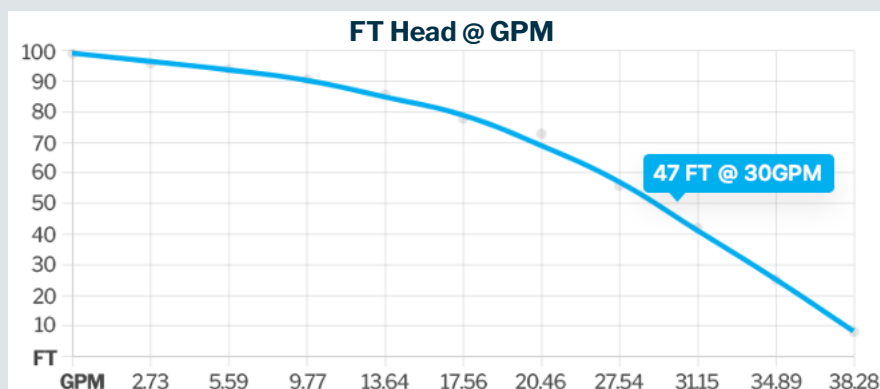

Designed to be used in septic effluent and cistern pumping where maximum draw down is needed. Built using 304 stainless steel and high-wear life thermoplastic components to ensure corrosion resistance and longevity.

## Key Features:

**2 Year Warranty** effective from the sale date for pro customers. (contact us for full warranty terms and details)

## Specs:

<b>Discharge Diameter:</b>	1.25 inches
<b>Solid Handling Capability</b>	Up to 1/8-inch without issues.
<b>Housing Material</b>	High-Grade 304 stainless steel
<b>Power Cord</b>	Heavy-Duty 10 ft SJOW jacketed cord
<b>Motor Size</b>	1/2HP
<b>Certifications</b>	NSF 61 Approved