



Ph: 866.710.2837 | www.AterCompany.com

SUBMERSIBLE STAINLESS VORTEX SEWAGE PUMP

Series: AP3SV.DS

5-7.5 HP

3450 RPM

DISCHARGE: 3"

Solids Handling: 1.75" (45 mm)



Stainless steel 316 construction.

DISCHARGE

3" (7.62 cm) NPT flange. Includes flanged elbow at discharge.

LIQUID TEMPERATURE

104 °F (40 °C)

PUMP CASING

316 series stainless steel

MOTOR COVER

316 series stainless steel

SEAL PLATE

316 series stainless steel

IMPELLER

Design: 8 vane, semi-open Vortex.

Material: 316 series stainless steel

SHAFT

316 series stainless steel

LIFTING BAIL

316 series stainless steel

MAX. SUBMERGENCE

32.8 ft (10 meters)

HARDWARE

316 series stainless steel

GASKETS

Viton®

SEAL

Design: double, mechanical, oil filled chamber.

Material: carbon-ceramic upper seal, silicon carbide lower seal, Viton® elastomers, stainless steel spring.

MOTOR


For continuous dry running, operates at 230/460 V, 1 & 3-phase, 3450 RPM, 60 Hz. Class B, IP68 protection, with capacitor integrated in motor.

BEARINGS

Ball type, lubricated and sealed for 60,000 hours operation. Designed for radial and axial loads.

CORD ENTRY

Includes 33 feet of special neoprene cable. The cable is sealed preventing from moisture to leak into the motor housing.

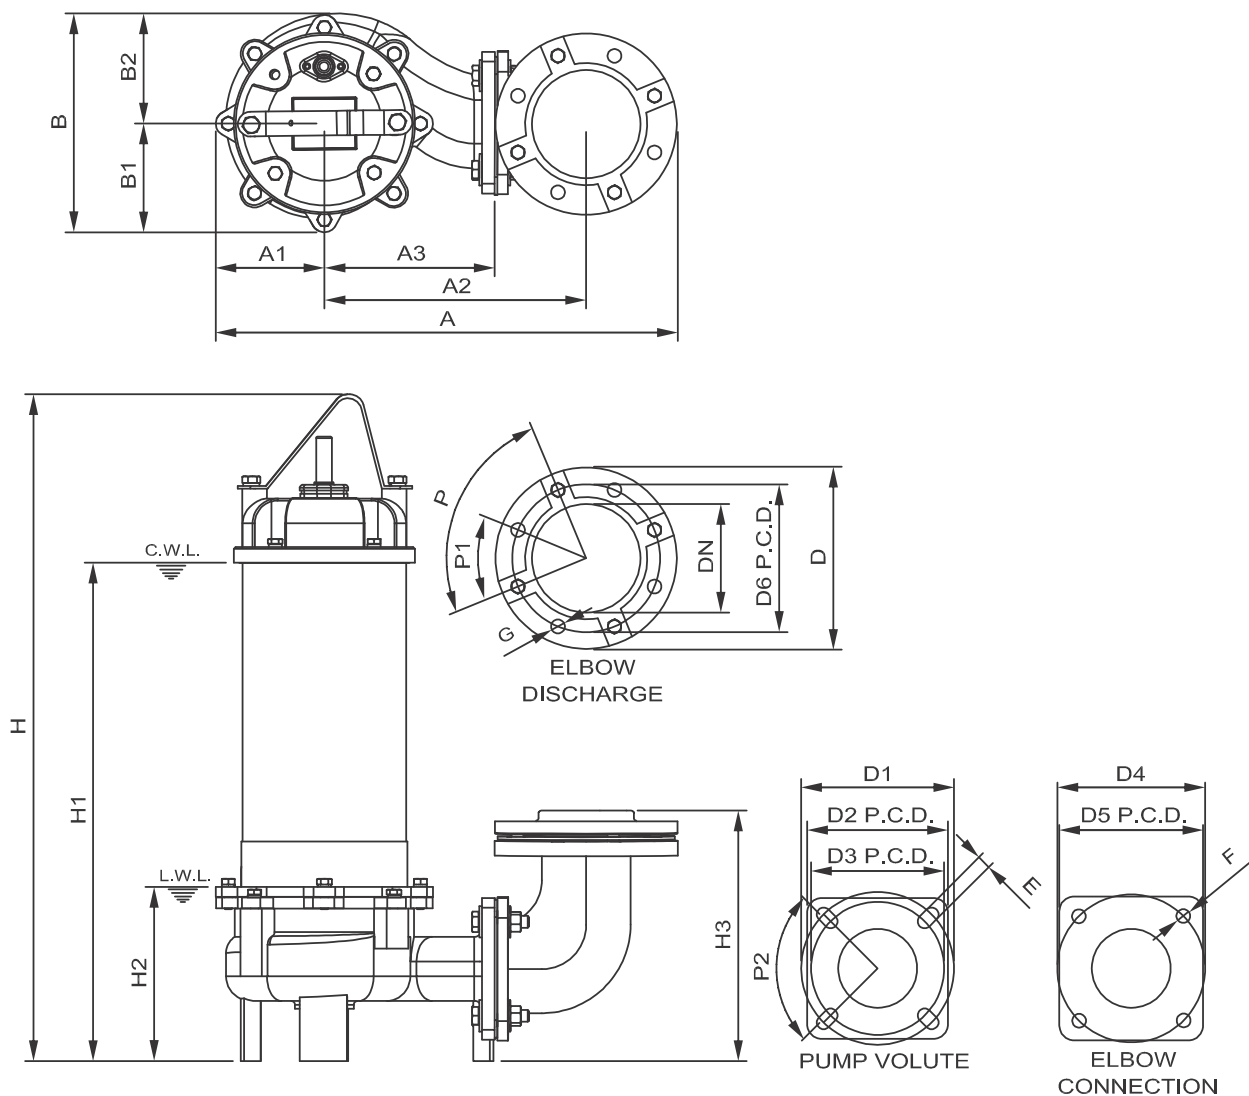

MODEL	HP	V	PH	MAX. AMPS	DISCHARGE DIAM.	DISCHARGE MAX. (m)	MAX. FLOW (GPM)	CORD (ft)	SPH SLD HNDLG
AP3SV503DS	5	230	3	15	3"	27	275	33	1.75"
AP3SV504DS	5	460	3	8	3"	27	275	33	1.75"
AP3SV753DS	7.5	230	3	21	3"	32	290.5	33	1.75"
AP3SV754DS	7.5	460	3	10.5	3"	32	290.5	33	1.75"

- Three-phase pump, VFD compatible. Reliable operation within 30 ~ 60 Hz.


MODEL	A	A1	A2	A3	B	B1	B2	D	D1	D2	D3	D4	D5
AP3SV503DS	18.4	3.9	10.8	7	8.3	3.7	4.5	7.2	5.6	6.1	5.3	5.5	5.9
AP3SV504DS	18.4	3.9	10.8	7	8.3	3.7	4.5	7.2	5.6	6.1	5.3	5.5	5.9
AP3SV753DS	18.4	3.9	10.8	7	8.3	3.7	4.5	7.2	5.6	6.1	5.3	5.5	5.9
AP3SV754DS	18.4	3.9	10.8	7	8.3	3.7	4.5	7.2	5.6	6.1	5.3	5.5	5.9

MODEL	D6	DN	E	F	G	P	P1	P2	H	H1	H2	H3	WT
AP3SV503DS	5.9	3	0.6	0.6	0.6	90°	45°	90°	24.9	18.4	6.3	8.9	105.6
AP3SV504DS	5.9	3	0.6	0.6	0.6	90°	45°	90°	24.9	18.4	6.3	8.9	105.6
AP3SV753DS	5.9	3	0.6	0.6	0.6	90°	45°	90°	26.5	20	6.3	8.9	118.4
AP3SV754DS	5.9	3	0.6	0.6	0.6	90°	45°	90°	26.5	20	6.3	8.9	118.4

- Dimensions in inches.

* WT = Weight in pounds, without cable.

IMPORTANT! 1. Never use this pump to handle explosive liquids. 2. This pump is not approved to be used in swimming pools, recreational installations or any application where human contact may be common. 3. Pump may be operated "dry" for extended periods without damage to motor and/or seals.

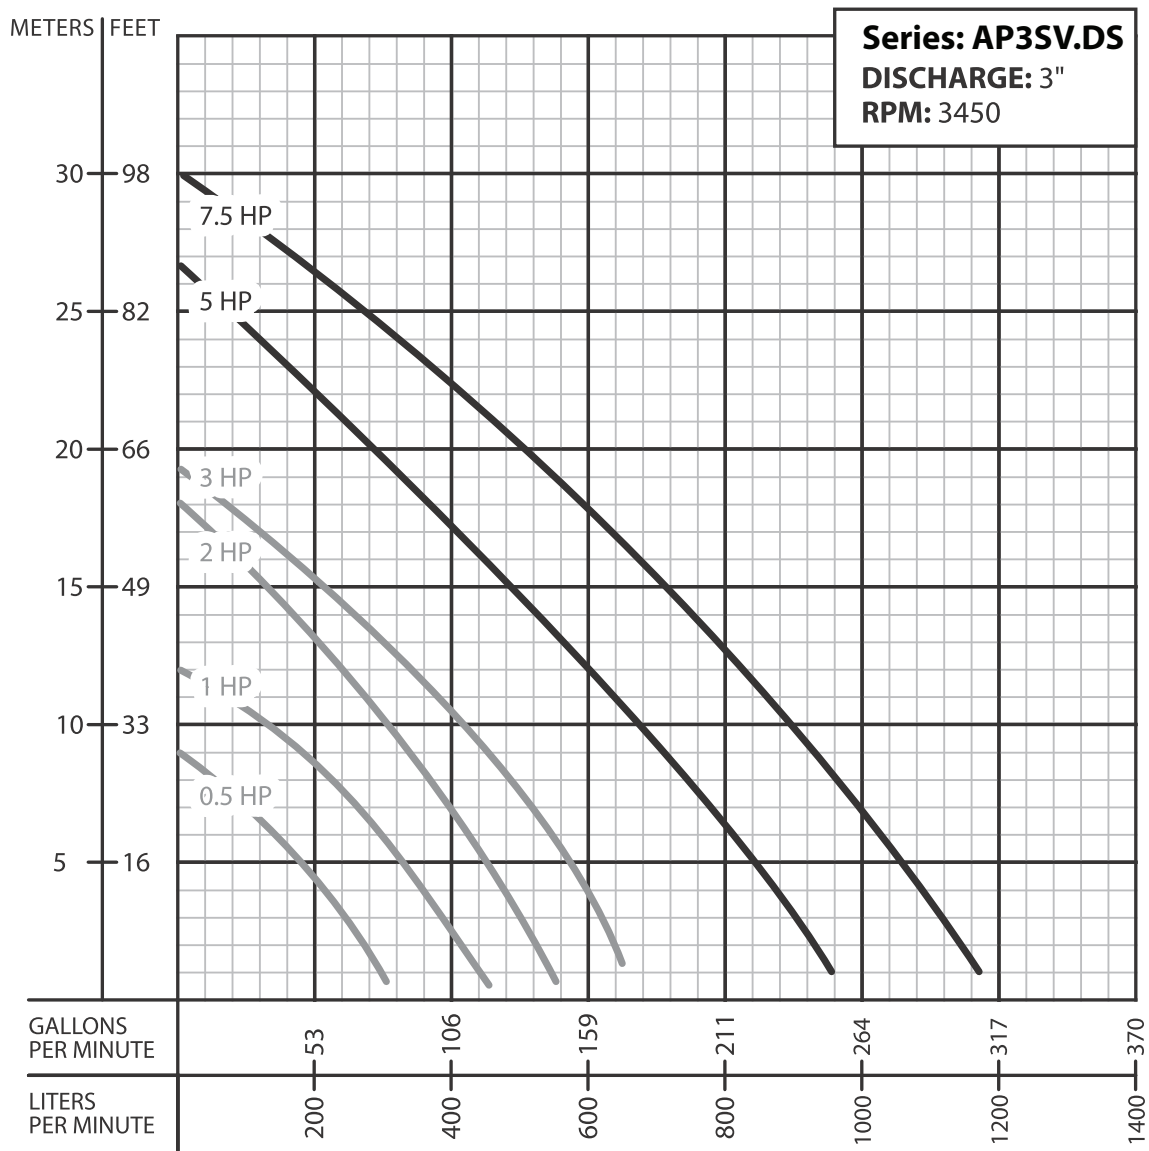

IMPORTANT!

1. Testing is performed with water specific gravity of 1.0 @ 68 °F (20 °C); other fluids may vary performance.