



Ph: 866.710.2837 | [www.AterCompany.com](http://www.AterCompany.com)

## SUBMERSIBLE DEVOUR GRINDER PUMP

**Series: AP2HG.DSSF.LS**

3,5,7.5 HP

3500 RPM

Discharge: 2.5"



### DISCHARGE

2" NPT, vertical.

### LIQUID TEMPERATURE

104 °F (40 °C)

### VOLUTE

Cast iron ASTM A-48 class 30

### MOTOR HOUSING

Cast iron ASTM A-48 class 30

### SEAL PLATE

Cast iron ASTM A-48 class 30

### IMPELLER

**Design:** 10 vanes, vortex with vanes on back side, dynamically balanced.

**Material:** Cast iron ASTM A-48, class 30.

**Radial cutter:** hardened 440C, stainless steel, hardness Rockwell C-55.

**Shredding ring:** hardened 440C, stainless steel, hardness Rockwell C-55.

### SHAFT

420 series stainless steel

### SQUARE RINGS

Buna-N

### HARDWARE

Stainless steel

### PAINT

Air dry enamel, water based.

### SEAL

**Design:** double, mechanical, oil lubricated.

**Material:** silicon carbide outboard, carbon ceramic inboard, Buna-N elastomer and stainless steel hardware.

### CORD ENTRY

40 ft of neoprene cord, sealed against moisture.

### BEARINGS

Ball, single row, oil lubricated.

### MOTOR



**Single phase:** NEMA L, capacitor start/run (to be located in control panel), 230 volts, 60 Hz, 3500 RPM, oil filled. Class F insulation.

**Three phase:** NEMA B, 208, 230 & 460 volts, 60 Hz, 3500 RPM, oil filled. Class F insulation.

Requires overload protection to be included in control panel.

### MOISTURE SENSOR

Normally open (N/O) included

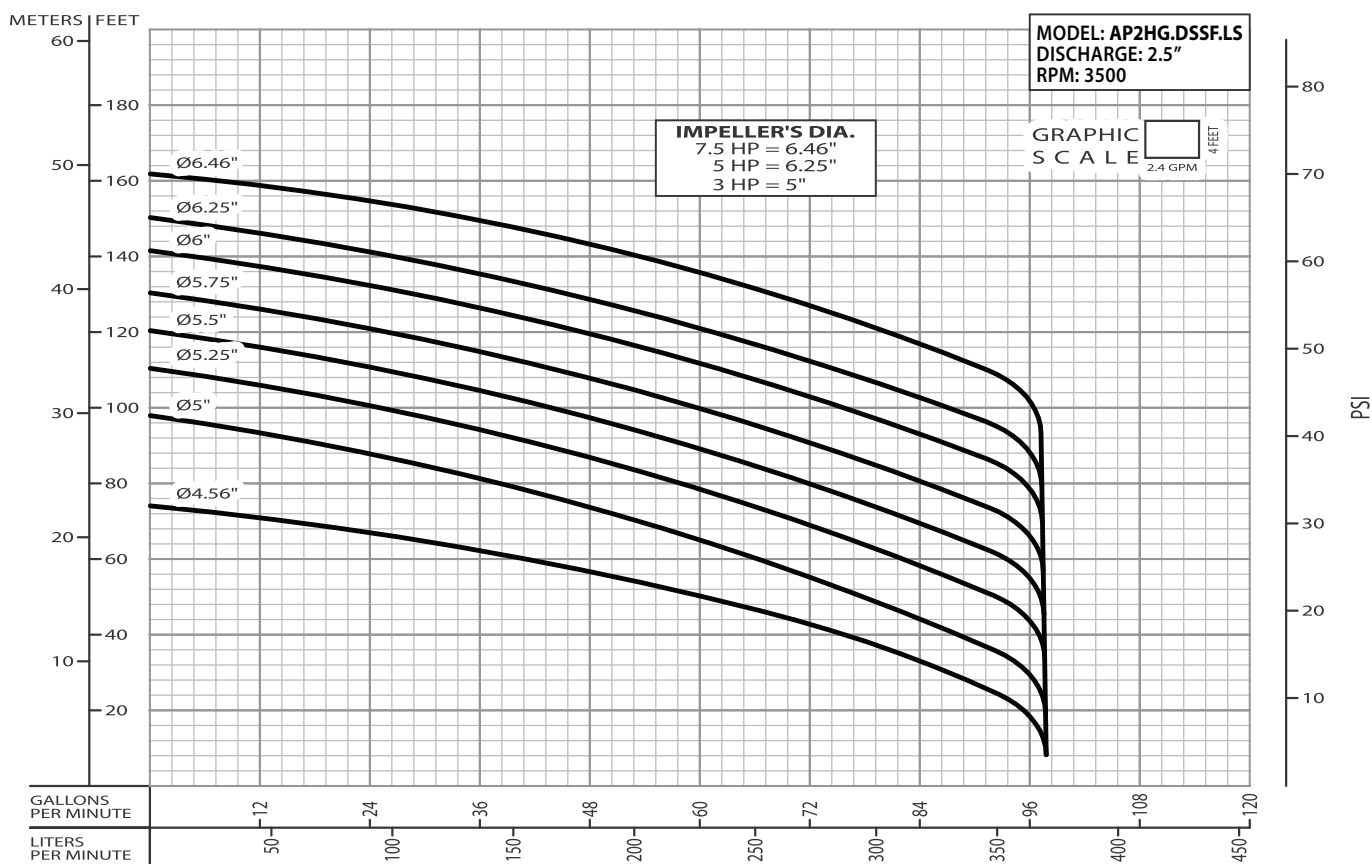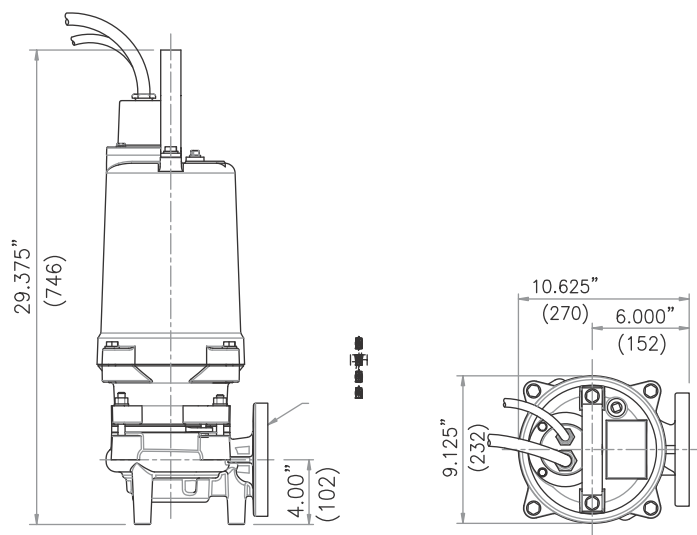

#### IMPORTANT!

1. Testing is performed with water specific gravity of 1.0 @ 68°F (20°C); other fluids may vary performance.

| MODEL                           | HP  | VOLTS | PHASE | RPM<br>(nominal) | MAX<br>AMPS | LOCKED<br>ROTOR AMPS | NEMA<br>CODE | CORD<br>SIZE | CORD<br>TYPE | WEIGHT<br>(lb) |
|---------------------------------|-----|-------|-------|------------------|-------------|----------------------|--------------|--------------|--------------|----------------|
| AP2HG3.0DSSF21LS35 <sup>1</sup> | 3   | 230   | 1     | 3500             | 23          | 75                   | G            | 10/4C        | SO           | 188            |
| AP2HG3.0DSSF2083LS35            | 3   | 208   | 3     | 3500             | 20          | 81.4                 | L            | 10/4C        | SO           | 188            |
| AP2HG3.0DSSF23LS35              | 3   | 230   | 3     | 3500             | 13          | 56.6                 | K            | 10/4C        | SO           | 188            |
| AP2HG3.0DSSF43LS35              | 3   | 460   | 3     | 3500             | 6.5         | 28.3                 | K            | 10/4C        | SO           | 188            |
| AP2HG5.0DSSF21LS35 <sup>1</sup> | 5   | 230   | 1     | 3500             | 39          | 117                  | H            | 10/4C        | SO           | 199            |
| AP2HG5.0DSSF2083LS35            | 5   | 208   | 3     | 3500             | 24          | 102                  | J            | 10/4C        | SO           | 199            |
| AP2HG5.0DSSF23LS35              | 5   | 230   | 3     | 3500             | 20          | 81.4                 | L            | 10/4C        | SO           | 199            |
| AP2HG5.0DSSF43LS35              | 5   | 460   | 3     | 3500             | 10          | 40.7                 | L            | 10/4C        | SO           | 199            |
| AP2HG7.5.DSSF23LS35             | 7.5 | 230   | 3     | 3500             | 24          | 102                  | J            | 10/4C        | SO           | 203            |
| AP2HG7.5.DSSF43LS35             | 7.5 | 460   | 3     | 3500             | 12          | 51                   | J            | 10/4C        | SO           | 203            |

<sup>1</sup> Factory capacitor kit included.

**IMPORTANT!** 1. Never use this pump to handle explosive liquids. 2. This pump is not approved to be used in swimming pools, recreational installations or any application where human contact may be common. 3. Pump may be operated "dry" for extended periods without damage to motor and/or seals.