



KLINGER SHIELD HT INSULATION SETS



- » Insulation sets are used to limit corrosion in pipeline systems. Where dissimilar metals are present, the sets remove the possibility of the system acting as a galvanic cell and reduce the risk of galvanic corrosion of the pipework.
- » Insulation sets are also used to isolate cathodically protected piping systems where they prevent the flow of electro-static charge.
- » Each insulation set comes with a KLINGER Shield HT insulation gasket, insulating washer set, high temperature insulation sleeves.



Figure 1 – Typical assembly with GW1 washers

Klinger Shield HT uses Thermica facing which is a CNAF fibre; using mica and NBR binder offers high flexibility, high temperature resistance and excellent compatibility across a broad range of chemicals.

COMPONENT	UNITS	KLINGER THERMICA	MICA SLEEVES
Compressibility	%	12	N/A
Recovery	%	<55	N/A
Stress Relaxation (DIN 52913, 50MPa, 16h, 300°C)	MPa	28	N/A
Density	g/cm ³	1.7	1.8
Dielectric Strength	kV/mm	15	22
Temperature Range	°C	-200 to 350	-100 to 700

PROPERTIES

- » Continuous service up to 350°C
- » Suitable for RTJ, RF and mismatched RF to RTJ flanges
- » Suitable for pressure ratings from Class 150 to 2500
- » Compressed fibre facings of mica & synthetic fibres bound with NBR on a high strength metallic core
- » Excellent chemical resistance
- » 3xA anti-stick finish

TESTS AND CERTIFICATIONS FOR KLINGER SHIELD HT

- » Fire-safe to DIN EN ISO 10497 / API 607
- » Fire-safe to API 6FB
- » Thermica complies with BS 7531 Grade AX

KLINGER SHIELD HT INSULATION SET COMPONENTS

Insulating Gasket:	Class 150 to 2500	4.6mm Thermica with metallic core
Insulating Washers:	Class 150 to 2500:	GW1 - 7.5mm Metallic washers with Thermica core
		2 washers per bolt, suitable for use up to 350°C
Insulating Sleeves:	Mica, wall thickness 0.75mm, 1 per bolt	

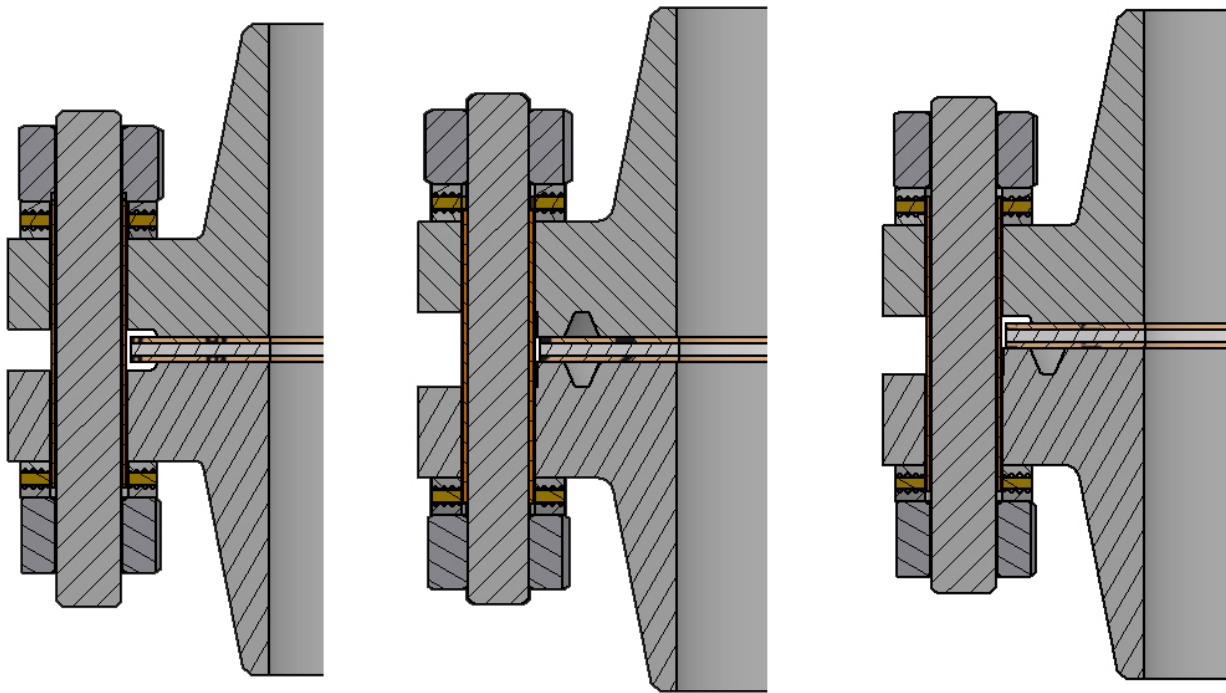


Figure 2 – Shield HT Insulation sets can be used between raised face & RTJ flanges and mismatched combinations. Washers shown, GW1 style

KLINGER Limited

AUSTRALIA

Western Australia - Head Office
38 McDowell Street Welshpool WA 6106

Queensland

Unit 3, 5-7 Roseanna Street
Gladstone QLD 4680

Tel: 1300 798 279 (from Australia)
Email: sales@klinger.com.au

Tel: +61 8 9251 1600 (outside Australia)
Tel: +61 8 9251 1688
Email: export@klinger.com.au

NEW ZEALAND

Tel: +64 272 735 045
Email: export@klinger.com.au

SINGAPORE

Tel: +65 6827 9045
Email: export@klinger.com.au

KLINGER Thailand

Telephone: +66 8547 51995
Email: sales1@klingerthailand.com