

TENO-M

IP67 IK08  

A > A' > A''

CRI 80   **L80B10**
50.000h



CODE TE02

TYPOLGY Projector

INSTALLATION POSITION wall, ceiling and ground mounting



INSTALLATION LOCATION Outdoor

TENO-M

POWER 6.5W

WEIGHT 0.33KG

DIMENSION 55.2mm

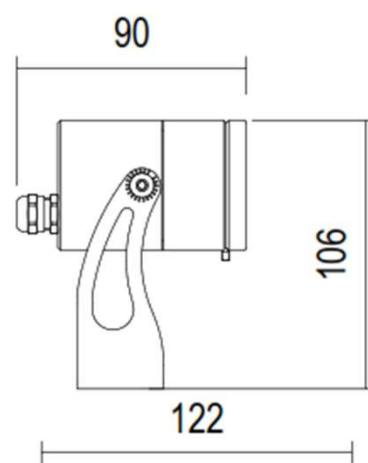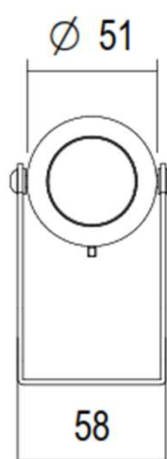

ELECTRICAL FEATURES

POWER CONSUMPTION	6.5W
POWER SUPPLY	24VDC Or C.C Or 230VAC
POWER SUPPLY UNIT	Remote
DIMMING	On/Off
CONNECTION	Main voltage

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>90
OPTICS	8 °, 16 °, 25 °, 40 °, 55 °, 40x15, Diffused
TOTAL DELIVERD LUMENS	481 lm (8°), 373 lm (16°), 410 lm (25°), 429 lm (40°), 389 lm (64°)
TOTAL NOMINAL LUMENS	594 lm (2700K), 553 lm (3000K), 641 lm (4000K)
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES


OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP67
IMPACT RESISTANCE	IK08
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	No
DRIVE OVER	No
TEMPERED GLASS	YES
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	Aluminium Alloy 6082

ACCESSORIES


TENO-M




CODE TMSH
 TYPOLOGY Shade
 WEIGHT 30 g
 MATERIAL aluminium




CODE MS
 TYPOLOGY MOUNTING STRAP
 WEIGHT
 MATERIAL



CODE SP
 TYPOLOGY PEG
 WEIGHT
 MATERIAL
 LENGTH 20 CM : 100 CM



CODE HC
 TYPOLOGY Filter
 WEIGHT 3 g
 MATERIAL aluminium



CODE TMBR
 TYPOLOGY Bracket (for installation)
 WEIGHT 78 g
 MATERIAL stainless steel