

TENO-M-68

IP68 IK08  

A > A' > A''

CRI 80   **L80B10**
50.000h



SUB

CODE TE04

TYPOLGY Projector

INSTALLATION POSITION wall, ceiling and ground mounting



INSTALLATION LOCATION Outdoor

TENO-M-68

POWER 6.5W

WEIGHT 0.33KG

DIMENSION 55.2mm

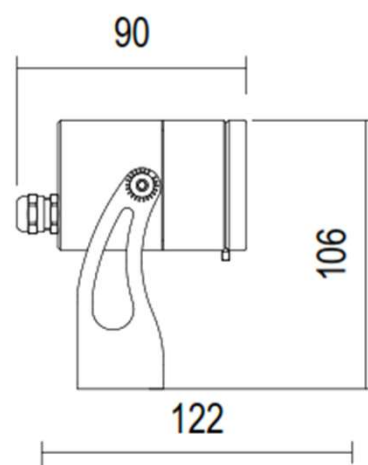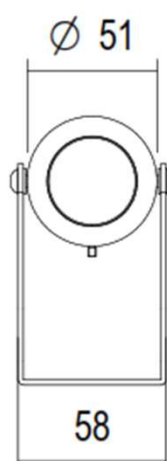

ELECTRICAL FEATURES

POWER CONSUMPTION	6.5W
POWER SUPPLY	24VDC Or C.C Or 230VAC
POWER SUPPLY UNIT	Remote
DIMMING	On/Off
CONNECTION	Main voltage

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>90
OPTICS	8 °, 16 °, 25 °, 40 °, 55 °, 40x15, Diffused
TOTAL DELIVERD LUMENS	481 lm (8°), 373 lm (16°), 410 lm (25°), 429 lm (40°), 389 lm (55°)
TOTAL NOMINAL LUMENS	594 lm (2700K), 553 lm (3000K), 641 lm (4000K)
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES


OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP68
IMPACT RESISTANCE	IK08
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	No
DRIVE OVER	No
TEMPERED GLASS	YES
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	STAINLESS STEEL

ACCESSORIES


TENO-M-68




CODE TMSH
TPOLOGY Shade
WEIGHT 30 g
MATERIAL aluminium



CODE MS
TPOLOGY MOUNTING STRAP
WEIGHT
MATERIAL



CODE SP
TPOLOGY PEG
WEIGHT
MATERIAL
LENGTH 20 CM : 100 CM



CODE HC
TPOLOGY Filter
WEIGHT 3 g
MATERIAL aluminium



CODE TMBR
TPOLOGY Bracket (for installation)
WEIGHT 78 g
MATERIAL stainless steel