

NEXIS-L

IP67 IK08 CE



CRI 80



L80B10 50.000h



CODE NE03


TYPOLGY Recessed
INSTALLATION POSITION In Ground
INSTALLATION LOCATION Outdoor

NEXIS-L

POWER 6.5 W

WEIGHT 0.18KG

DIMENSION 85mm

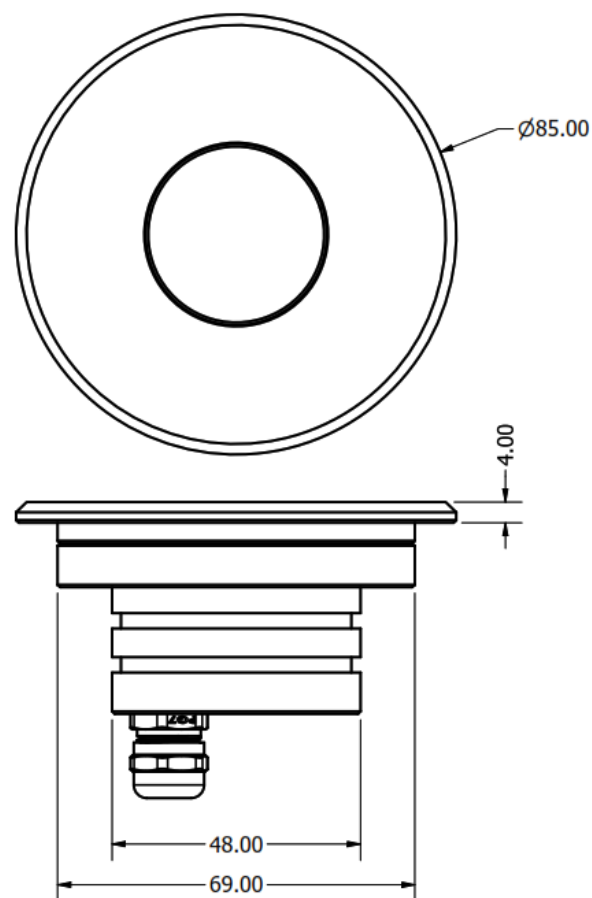

ELECTRICAL FEATURES

POWER CONSUMPTION	6W for C.C or 6.5W 24Vdc & 230 VAC
POWER SUPPLY	24VDC Or C.C
POWER SUPPLY UNIT	Remote
DIMMING	On/Off
CONNECTION	Series for C.C / Parallel for 24Vdc / Main Voltage for 230 VAC

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>80
OPTICS	8°, 16°, 25° , 40° , 55°, 40x15, Diffused
TOTAL DELIVERD LUMENS	481 lm (8°), 373 lm (16°), 410 lm (25°), 429 lm (40°), 389 lm (55°)
TOTAL NOMINAL LUMENS	594 lm (2700K), 553 lm (3000K), 641 lm (4000K)
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES


OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP67
IMPACT RESISTANCE	IK08
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	Yes
DRIVE OVER	Yes
TEMPERED GLASS	Yes
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	Aluminium 6082 Body / AISI 316L Stainless-steel trim

ACCESSORIES

NEXIS-L

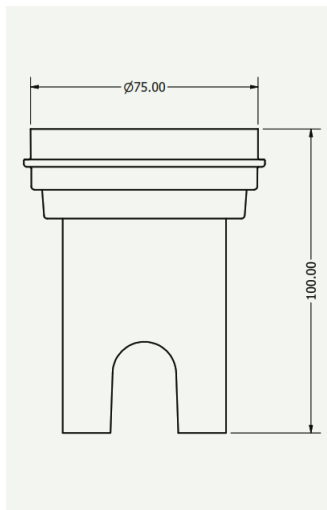

CODE *NLHB*
TYPOLGY *Housing box*
WEIGHT *45g*
MATERIAL *Polyethylene*

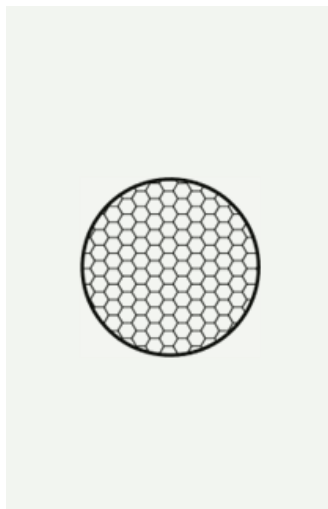

CODE *HC*
TYPOLGY *Filter*
WEIGHT *3 g*
MATERIAL *Aluminium*