

MARE T


IP66 IK08 CE  | A > A+ > A++  230V CRI 80 L80B10 50.000h 

CODE **MA03**

TYPOLGY Pole
INSTALLATION POSITION On Ground
INSTALLATION LOCATION Outdoor

MARE T

POWER 100 W
WEIGHT 7.2 KG/M
DIMENSION 4,5,6 M

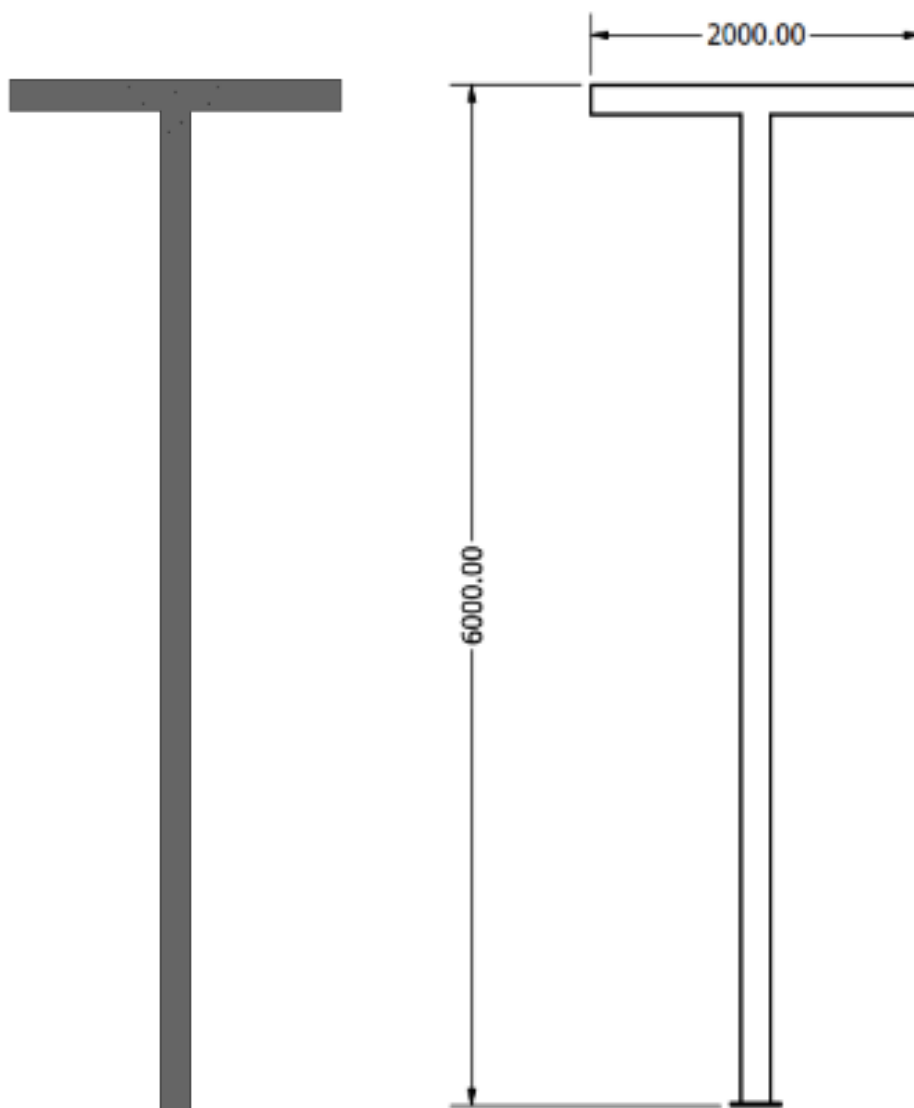

ELECTRICAL FEATURES

POWER CONSUMPTION	100 w
POWER SUPPLY	230 VAC
POWER SUPPLY UNIT	Integrated
DIMMING	On/Off
CONNECTION	Main voltage

LIGHTING FEATURES


LED COLOR	3000K, 4000K, 6500K
CRI	>80
OPTICS	100°
TOTAL REAL LUMENS	14000 lm
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES


OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP66
IMPACT RESISTANCE	IK08
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	NO
DRIVE OVER	NO
TEMPERED GLASS	NO
POWER CABLES	Not provided
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	6063-T6

ACCESSORIES

MARE T

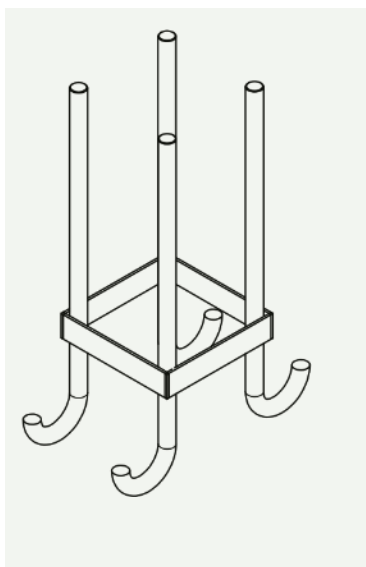

CODE *MTBA*
TYPOLOGY *Base*
WEIGHT
MATERIAL *STAINLESS STEEL*

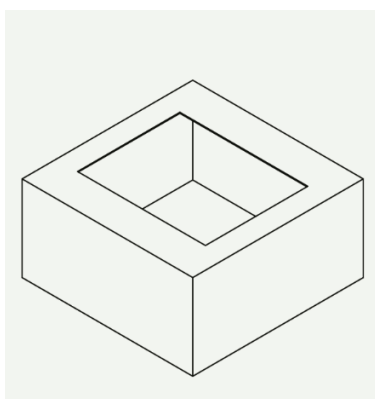

CODE *MTBC*
TYPOLOGY *Base cover*
WEIGHT
MATERIAL *Aluminium*