

# MARE M


IP66 IK08 CE  | A > A+ > A++  CRI 80 L80B10 50.000h 

CODE MA02

TYPOLGY Pole  
INSTALLATION POSITION On Ground  
INSTALLATION LOCATION Outdoor

## MARE M

POWER 50 W  
WEIGHT 7.2 KG/M  
DIMENSION 6 M

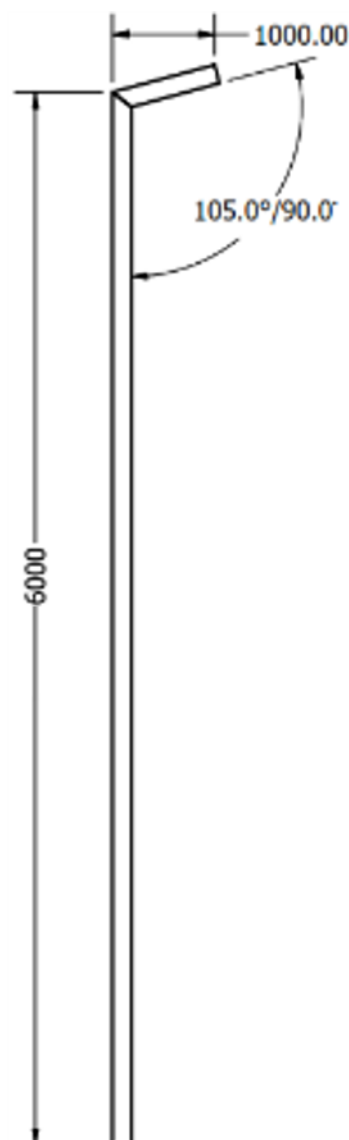

## ELECTRICAL FEATURES

---

|                   |              |
|-------------------|--------------|
| POWER CONSUMPTION | 50W          |
| POWER SUPPLY      | 230 VAC      |
| POWER SUPPLY UNIT | Integrated   |
| DIMMING           | On/Off       |
| CONNECTION        | Main voltage |

## LIGHTING FEATURES

---

|                   |                     |
|-------------------|---------------------|
| LED COLOR         | 3000K, 4000K, 6500K |
| CRI               | >80                 |
| OPTICS            | 100°                |
| TOTAL REAL LUMENS | 7500 lm             |
| AVERAGE LED LIFE  | 50.000h L80 B10     |

## GENERAL FEATURES


---

|                        |                |
|------------------------|----------------|
| OPERATING TEMPERATURE  | 50°C           |
| INGRESS PROTECTION     | IP66           |
| IMPACT RESISTANCE      | IK08           |
| GLOW WIRE TEST         | 960°C          |
| SCREEN TEMPERATURE     | 40° @ Ta = 25° |
| APPLIANCE CLASS        | I              |
| WALKOVER               | NO             |
| DRIVE OVER             | NO             |
| TEMPERED GLASS         | NO             |
| POWER CABLES           | Not Provided   |
| STANDARD SAFETY        | /              |
| PHOTOBIOLOGICAL SAFETY | GR1            |
| MATERIAL               | 6063-T6        |


# ACCESSORIES

## MARE M

---

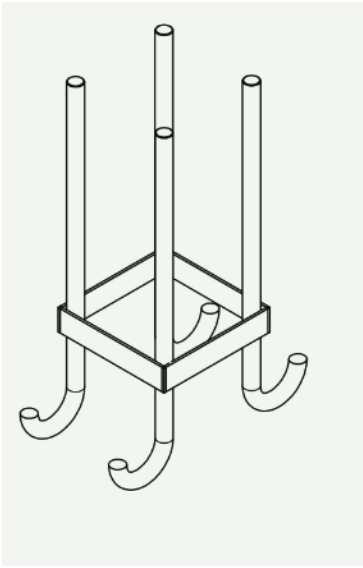

CODE MMBA  
TYPOLOGY *Base*  
WEIGHT  
MATERIAL *STAINLESS STEEL*

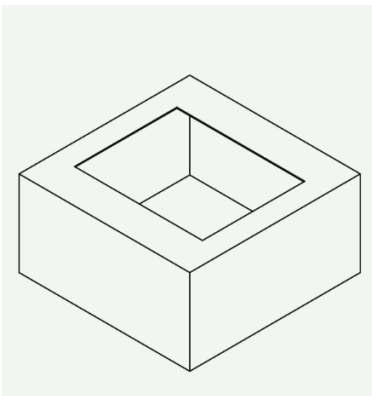

CODE MMBC  
TYPOLOGY *Base cover*  
WEIGHT  
MATERIAL *Aluminium*