

NEXIS-XL-24V-68

IP68 IK09 C_E  CRI 80  L80B10 50.000h  SUB 

CODE NE09


TYPOLGY Recessed
INSTALLATION POSITION In ground
INSTALLATION LOCATION Outdoor

NEXIS-XL 24V-68

POWER 18W

WEIGHT 1.4KG

DIMENSION 138mm

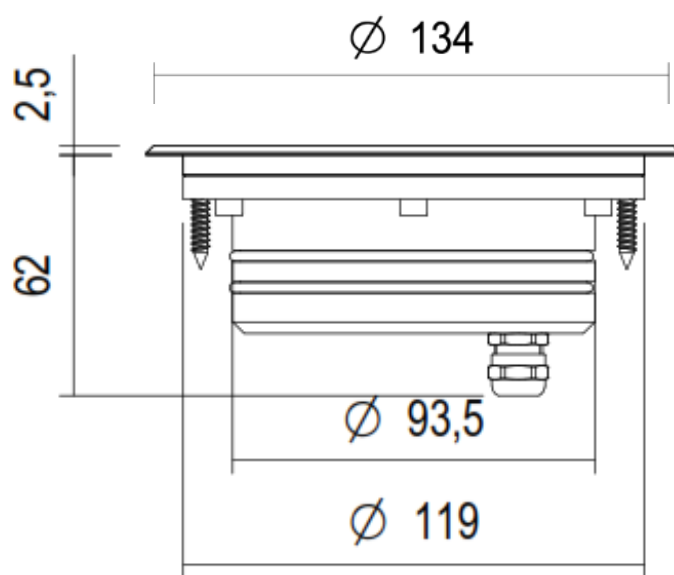

ELECTRICAL FEATURES

POWER CONSUMPTION	18W
POWER SUPPLY	24VDC
POWER SUPPLY UNIT	Remote
DIMMING	On/Off
CONNECTION	Parallel

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>80
OPTICS	Asymmetric, 13 °, 18°, 24°, 36°, 60 °, 60x25, Diffused
TOTAL DELIVERD LUMENS	1200 lm (13°)
TOTAL NOMINAL LUMENS	1304 lm (2700k), 1332 lm (3000K), 1390 lm (4000K)
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES


OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP68
IMPACT RESISTANCE	IK09
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	Yes
DRIVE OVER	Yes
TEMPERED GLASS	Yes
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	AISI 316L Stainless Steel

ACCESSORIES

NEXIS-XL-24V-68

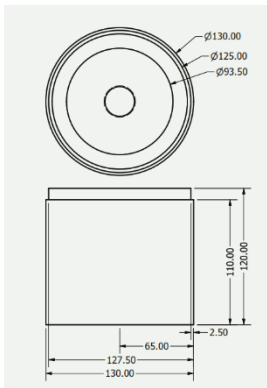

CODE *NXHB68*
TPOLOGY *Housing box*
WEIGHT *52 g*
MATERIAL *Polyethylene*

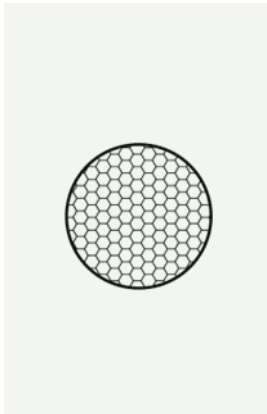

CODE *HC*
TPOLOGY *Filter*
WEIGHT *0.016 g*
MATERIAL *Aluminium*