

NEXIS-L-68


IP68 IK08 CE   CRI 80  L80B10 50.000h   SUB

CODE NE08

TYPOLGY Recessed
INSTALLATION POSITION In Ground
INSTALLATION LOCATION Outdoor

NEXIS-L-68

POWER 6.5 W
WEIGHT 0.18KG
DIMENSION 85mm

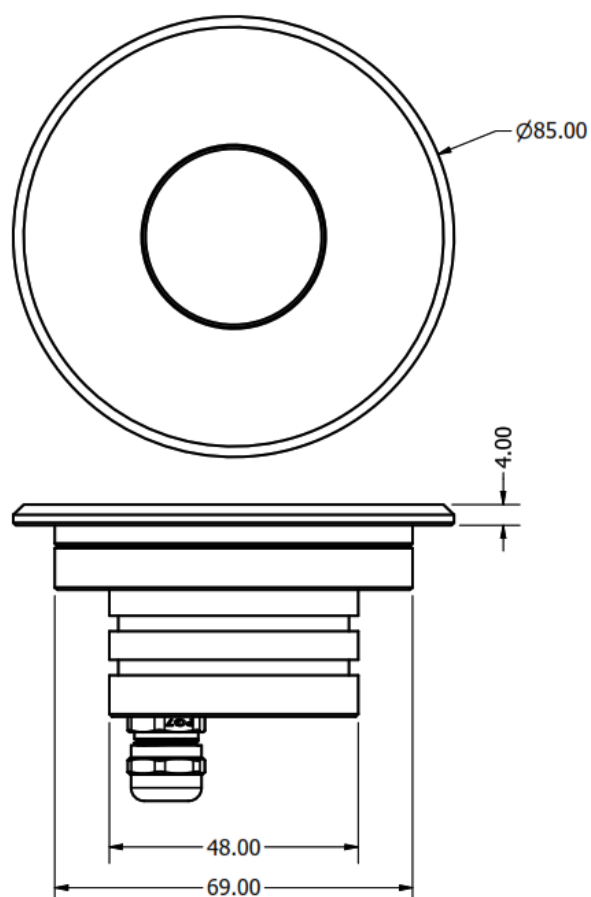

ELECTRICAL FEATURES

POWER CONSUMPTION	6.5W
POWER SUPPLY	24VDC
POWER SUPPLY UNIT	Remote
DIMMING	On/Off
CONNECTION	Parallel

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>80
OPTICS	8°, 16°, 25°, 40°, 55°, 40x15, Diffused
TOTAL DELIVERD LUMENS	481 lm (8°), 373 lm (16°), 410 lm (25°), 429 lm (40°), 389 lm (55°)
TOTAL NOMINAL LUMENS	594 lm (2700K), 553 lm (3000K), 641 lm (4000K)
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES


OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP68
IMPACT RESISTANCE	IK08
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	Yes
DRIVE OVER	Yes
TEMPERED GLASS	Yes
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	AISI 316L Stainless Steel

ACCESSORIES

NEXIS-L-68

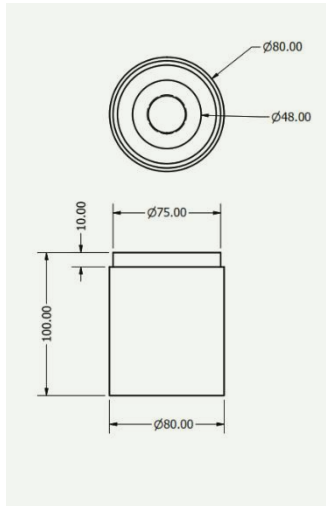

CODE *NLHB68*
TYPOLGY *Housing box*
WEIGHT *38g*
MATERIAL *Polyethylene*

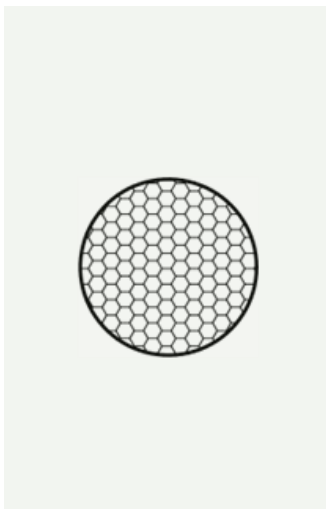

CODE *HC*
TYPOLGY *Filter*
WEIGHT *3 g*
MATERIAL *Aluminium*