

TENO-M-68

IP68 IK08 CE | A > A+ > A++ CRI 80 L80B10 50.000h 24Vdc

CODE TE04



TYPOLGY Projector
INSTALLATION POSITION wall, ceiling and ground mounting
INSTALLATION LOCATION Outdoor

TENO-M-68

POWER 6.5W

WEIGHT 0.33KG

DIMENSION 55.2mm

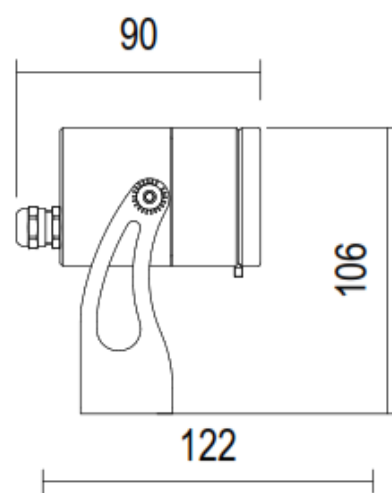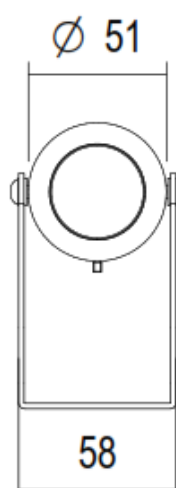

ELECTRICAL FEATURES

POWER CONSUMPTION	6.5W
POWER SUPPLY	24VDC
POWER SUPPLY UNIT	Remote
DIMMING	On/Off
CONNECTION	Parallel

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>90
OPTICS	8 °, 16 °, 25 °, 40 °, 55 °, 40x15
TOTAL DELIVERD LUMENS	481 lm (8°), 373 lm (16°), 410 lm (25°), 429 lm (40°), 389 lm (55°)
TOTAL NOMINAL LUMENS	594 lm (2700K), 553 lm (3000K), 641 lm (4000K)
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES


OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP68
IMPACT RESISTANCE	IK08
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	No
DRIVE OVER	No
TEMPERED GLASS	YES
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	AISI 316L Stainless Steel

ACCESSORIES


TENO-M-68



CODE SP
TYPOLOGY PEG
WEIGHT
MATERIAL AISI 316L Stainless Steel



CODE HC
TYPOLOGY Filter
WEIGHT 3 g
MATERIAL aluminium



CODE TMBR
TYPOLOGY Bracket (for installation)
WEIGHT 78 g
MATERIAL AISI 316L Stainless Steel