

# LIMA

**IP67 IK06**    | **A>A+>A++**  **CRI 80** **L80B10** **50.000h**



CODE LI01



**TYPOLGY** Projector  
**INSTALLATION POSITION** On Ground  
**INSTALLATION LOCATION** Outdoor

## LIMA 230V

**POWER** 12 W  
**WEIGHT** 1.14KG  
**DIMENSION** 98mm

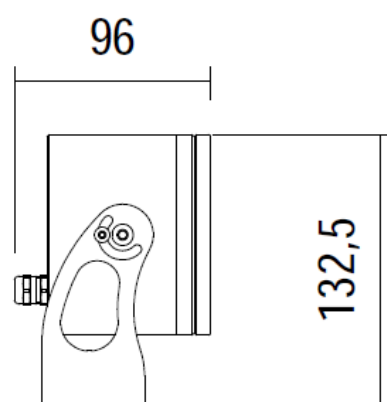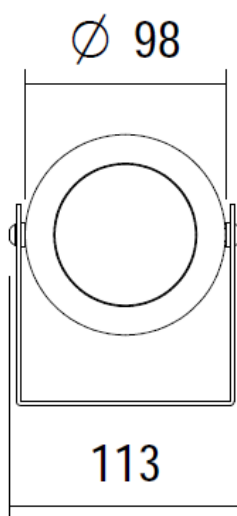

## ELECTRICAL FEATURES

---

|                   |                          |
|-------------------|--------------------------|
| POWER CONSUMPTION | 12 W                     |
| POWER SUPPLY      | 230 VAC                  |
| POWER SUPPLY UNIT | Integrated               |
| DIMMING           | On/Off , Dimmable (Dali) |
| CONNECTION        | Main voltage             |

## LIGHTING FEATURES

---

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| LED COLOR             | 2200K, 2700K, 3000K, 4000K                        |
| CRI                   | >80                                               |
| OPTICS                | Asymmetric, 13°, 18°, 24°, 36°, 60°, 60x25        |
| TOTAL DELIVERD LUMENS | 1220 lm                                           |
| TOTAL NOMINAL LUMENS  | 1394 lm (2700K), 1481 lm (3000K), 1524 lm (4000K) |
| AVERAGE LED LIFE      | 50.000h L80 B10                                   |


## GENERAL FEATURES

---


|                        |                           |
|------------------------|---------------------------|
| OPERATING TEMPERATURE  | 50°C                      |
| INGRESS PROTECTION     | IP67                      |
| IMPACT RESISTANCE      | IK06                      |
| GLOW WIRE TEST         | 960°C                     |
| SCREEN TEMPERATURE     | 40° @ Ta = 25°            |
| APPLIANCE CLASS        | I                         |
| WALKOVER               | NO                        |
| DRIVE OVER             | NO                        |
| TEMPERED GLASS         | Yes                       |
| POWER CABLES           | Provided with 50 cm cable |
| STANDARD SAFETY        | /                         |
| PHOTOBIOLOGICAL SAFETY | GR1                       |
| MATERIAL               | Aluminium Alloy 6082      |

# ACCESSORIES


## LIMA 230V

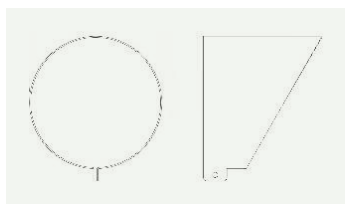


**CODE** *LISH*  
**TYPOLGY** *Shade*  
**WEIGHT** *45 G*  
**MATERIAL** *Aluminium*




**CODE** *SP*  
**TYPOLGY** *Peg*  
**WEIGHT**  
**MATERIAL** *AISI 316 L STAINLESS STEEL*



**CODE** *MS*  
**TYPOLGY** *Tree strap*  
**WEIGHT**  
**MATERIAL** *Galvanized Steel*



**CODE** *HC*  
**TYPOLGY** *Filter*  
**WEIGHT** *1.6 g*  
**MATERIAL** *Aluminium*



**CODE** *LIBR*  
**TYPOLGY** *Bracket*  
**WEIGHT** *161 g*  
**MATERIAL** *AISI 316 L STAINLESS STEEL*