

SCALA

IP65 IK06 

A>A>A++


230V

CRI
80 L80B10
50.000h



CODE **SC01**

TYPOLGY Steplight

INSTALLATION POSITION In Wall




INSTALLATION LOCATION Outdoor

SCALA

POWER 2W

WEIGHT 0.56KG

DIMENSION 175mm

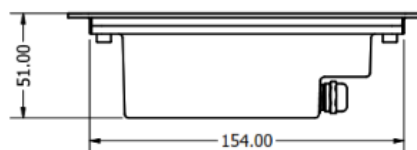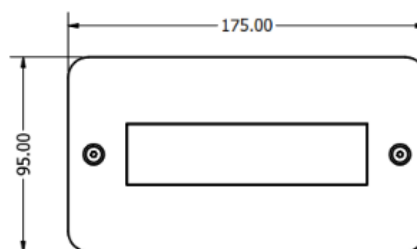

ELECTRICAL FEATURES

POWER CONSUMPTION	2W
POWER SUPPLY	230 VAC
POWER SUPPLY UNIT	Integrated
DIMMING	On/Off
CONNECTION	Main voltage

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>80
OPTICS	Diffused
TOTAL DELIVERD LUMENS	100 lm
TOTAL NOMINAL LUMENS	4000K 200 lm
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES

OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP 65
IMPACT RESISTANCE	IK 06
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	No
DRIVE OVER	No
TEMPERED GLASS	Yes
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	Aluminium

ACCESSORIES

SCALA

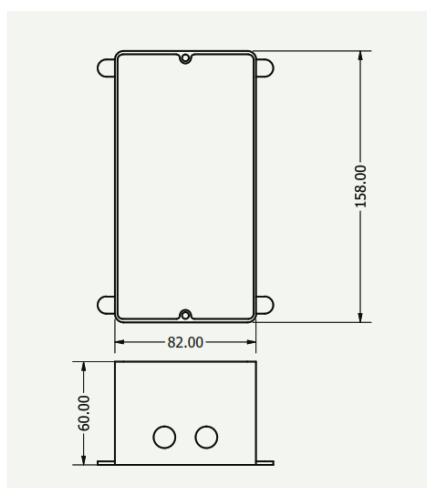

CODE *SCHB*

TYPOLGY *Housing box*

WEIGHT *66g*

MATERIAL *Polyethylene*