

NEXIS-XL-24V


IP67 IK09 CE  | A > A+ > A++ CRI 80  L80B10 50.000h  

CODE NE05

TYPOLGY Recessed
INSTALLATION POSITION In ground
INSTALLATION LOCATION Outdoor

NEXIS-XL 24V

POWER 18W
WEIGHT 1.4KG
DIMENSION 138mm

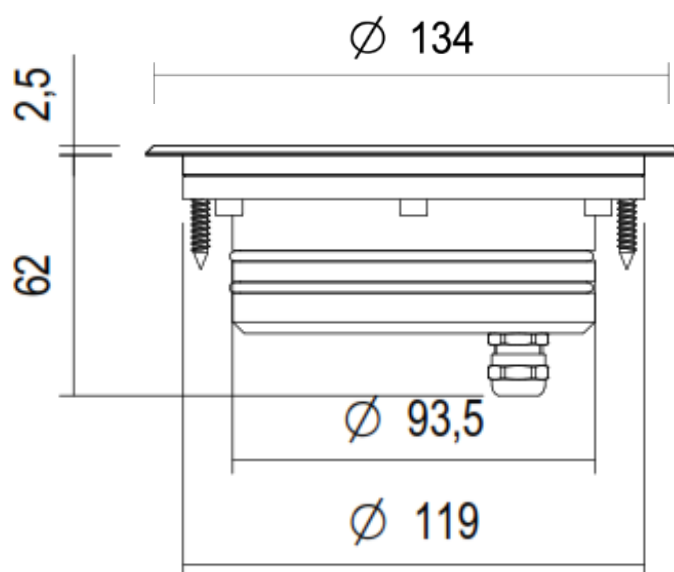

ELECTRICAL FEATURES

POWER CONSUMPTION	18W
POWER SUPPLY	24VDC
POWER SUPPLY UNIT	Remote
DIMMING	On/Off
CONNECTION	Parallel

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>80
OPTICS	Asymmetric, 18°, 24°, 36°, 60°, 60x25, Diffused
TOTAL DELIVERD LUMENS	1440 lm (18°)
TOTAL NOMINAL LUMENS	1600 lm (2700k), 1332 lm (3000K), 1390 lm (4000K)
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES


OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP67
IMPACT RESISTANCE	IK09
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	Yes
DRIVE OVER	Yes
TEMPERED GLASS	Yes
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	Aluminium Alloy 6082 Body / AISI 316L stainless steel trim

ACCESSORIES

NEXIS-XL-24V

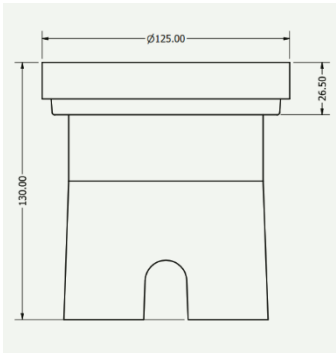

CODE *NXHB*
TYPOLGY *Housing box*
WEIGHT *52 g*
MATERIAL *Polyethylene*

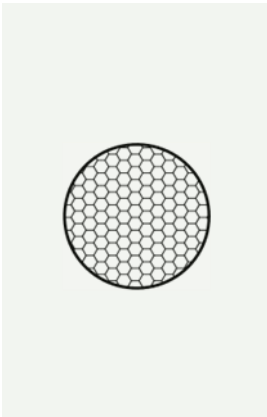

CODE *HC*
TYPOLGY *Filter*
WEIGHT *0.16 g*
MATERIAL *Aluminium*