

VIA DOUBLE

IP67 IK10  



CRI 80



**L80B10
50.000h**



CODE VIA02



TYPOLGY Recessed
INSTALLATION POSITION In Ground
INSTALLATION LOCATION Outdoor

VIA DOUBLE

POWER 2.2W

WEIGHT 0.18KG

DIMENSION 42mm

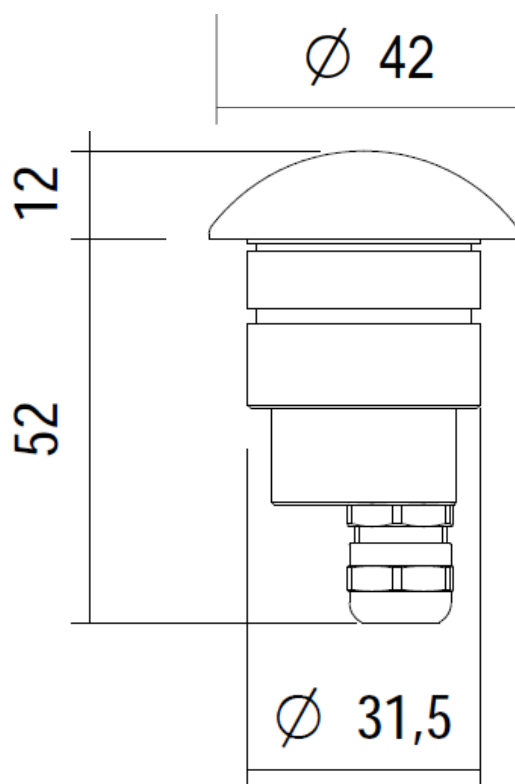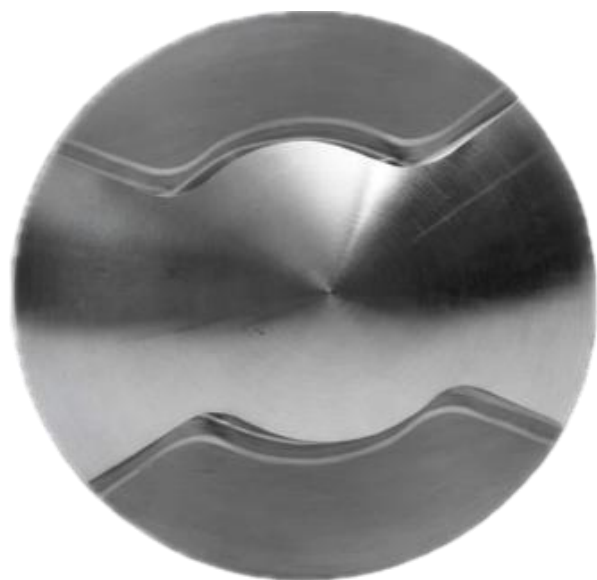

ELECTRICAL FEATURES

POWER CONSUMPTION	2.2 W for 24 Vdc or 1.6 W for C.C
POWER SUPPLY	24Vdc Or C.C
POWER SUPPLY UNIT	Remote
DIMMING	On/Off
CONNECTION	Series for C.C / Parallel for 24Vdc

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>80
OPTICS	RADIAL
TOTAL DELIVERD LUMENS	28 lm
TOTAL NOMINAL LUMENS	180 lm (2700 K), 190 lm, (3000 K), 200 lm (4000 K)
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES

OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP67
IMPACT RESISTANCE	IK10
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	Yes
DRIVE OVER	Yes
TEMPERED GLASS	NO
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	Aluminium Alloy 6082 / AISI 316L Stainless Steel

ACCESSORIES

VIA DOUBLE

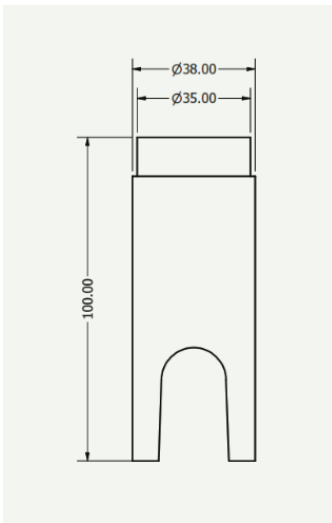

CODE VIBH

TYPOLGY *Housing box*

WEIGHT *20g*

MATERIAL *Polyethylene*