

NEXIS-XL-230V

IP67 IK09 CE CRI 80 L80B10 50.000h

CODE **NEX4**


TYPOLGY Recessed
INSTALLATION POSITION In ground
INSTALLATION LOCATION Outdoor

NEXIS-XL 230V

POWER 10W

WEIGHT 1.68KG

DIMENSION 138mm

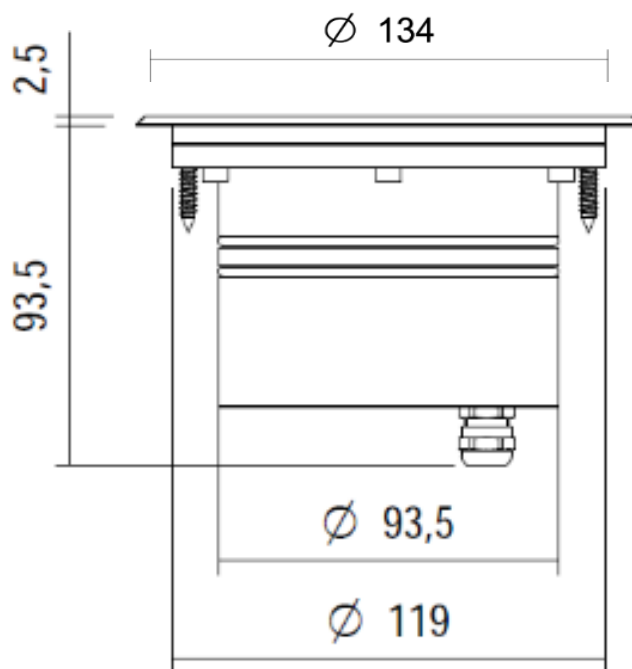

ELECTRICAL FEATURES

POWER CONSUMPTION	10W
POWER SUPPLY	230 VAC
POWER SUPPLY UNIT	Integrated
DIMMING	On/Off , Dimmable (Dali)
CONNECTION	Main voltage

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>80
OPTICS	Asymmetric, 13 °, 18°, 24°, 36°, 60 °, 60x25, Diffused
TOTAL DELIVERD LUMENS	1200 lm (13°)
TOTAL NOMINAL LUMENS	1304 lm (2700k), 1332 lm (3000K), 1390 lm (4000K)
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES

OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP67
IMPACT RESISTANCE	IK09
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	Yes
DRIVE OVER	Yes
TEMPERED GLASS	Yes
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	Aluminium Alloy 6082 Body / 316L stainless steel trim

ACCESSORIES

NEXIS-XL 230V

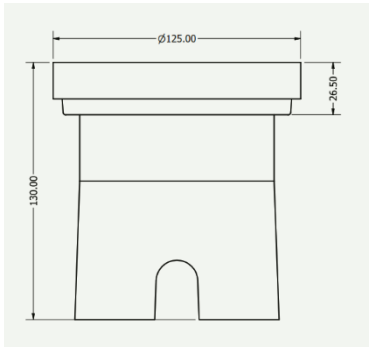


CODE NXHB

TYPOLGY *Housing box*

WEIGHT 52 g

MATERIAL *Polyethylene*

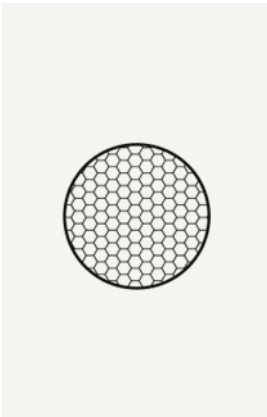

CODE HC

TYPOLGY *Filter*

WEIGHT 0.16 g

MATERIAL *Aluminium*