

NEXIS-S

IP67 IK07 CE  

A A+ A++

CFI 80

C.C.

24Vdc

L80B10
50.000h



CODE NE01


TYPOLGY Recessed
INSTALLATION POSITION In Ground
INSTALLATION LOCATION Outdoor

NEXIS-S

POWER 2.2W

WEIGHT 0.18 KG

DIMENSION 32mm

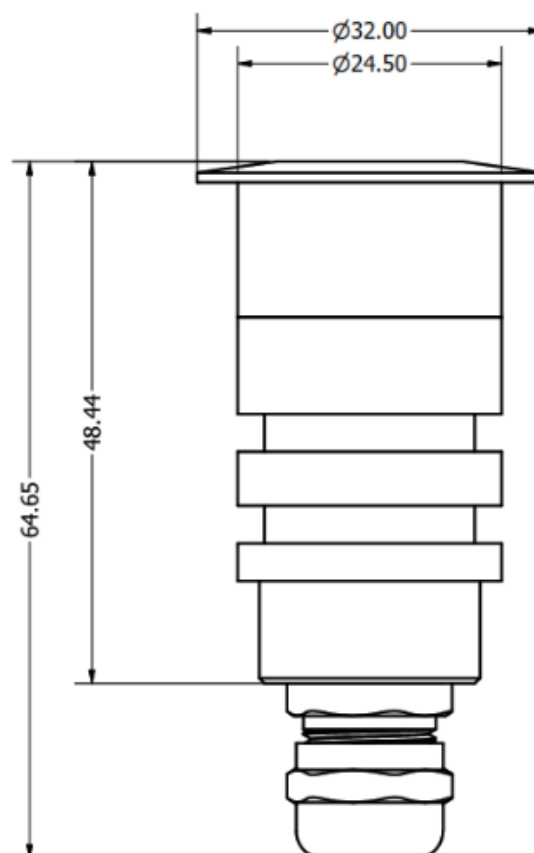

ELECTRICAL FEATURES

POWER CONSUMPTION	2.2W for 24Vdc Or 1.6W for C.C
POWER SUPPLY	24Vdc Or C.C
POWER SUPPLY UNIT	Remote
DIMMING	On/Off
CONNECTION	Series for C.C / Parallel for 24Vdc

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>80
OPTICS	14°, 20°, 45°, Diffused
TOTAL DELIVERD LUMENS	159 lm (14°), 146 lm (20°), 148 lm (45°)
TOTAL NOMINAL LUMENS	180 lm (2700K), 190 lm (3000K), 200 lm (4000K)
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES


OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP67
IMPACT RESISTANCE	IK07
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	Yes
DRIVE OVER	Yes
TEMPERED GLASS	Yes
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	Aluminium Alloy 6082 / Aluminium or 316L Stainless Steel trim

ACCESSORIES

NEXIS-S

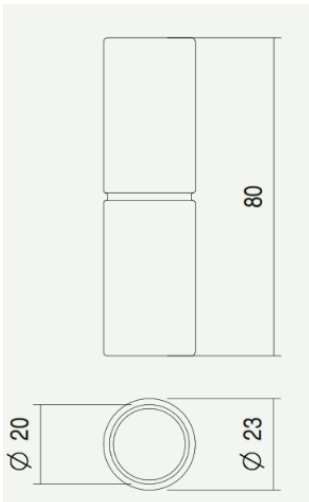

CODE *NSHB*
TYPOLGY *Housing box*
WEIGHT *15g*
MATERIAL *Polyethylene*

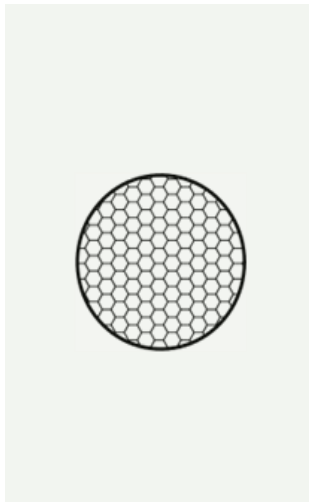

CODE *HC*
TYPOLGY *Filter*
WEIGHT *0.9 g*
MATERIAL *Aluminium*