

TENO-M

IP67 IK08



CFR
80



L80B10
50.000h



CODE TE02

TYPOLGY Projector

INSTALLATION POSITION wall, ceiling and ground mounting



INSTALLATION LOCATION Outdoor

TENO-M

POWER 6.5W

WEIGHT 0.33KG

DIMENSION 55.2mm

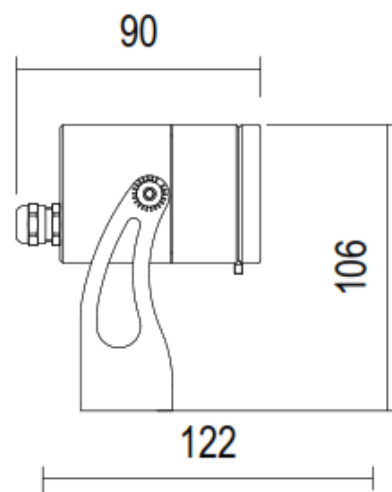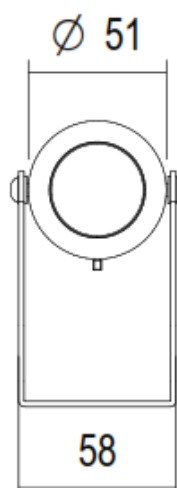

ELECTRICAL FEATURES

POWER CONSUMPTION	6W for 24Vdc & 230 Vac / 6.5 W for C.C
POWER SUPPLY	24VDC Or C.C Or 230VAC
POWER SUPPLY UNIT	Remote
DIMMING	On/Off
CONNECTION	Series for C.C / Parallel for 24Vdc / Main Voltage for 230Vac

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>90
OPTICS	8 °, 16 °, 25 °, 40 °, 55 °, 40x15
TOTAL DELIVERD LUMENS	481 lm (8°), 373 lm (16°), 410 lm (25°), 429 lm (40°), 389 lm (64°)
TOTAL NOMINAL LUMENS	594 lm (2700K), 553 lm (3000K), 641 lm (4000K)
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES


OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP67
IMPACT RESISTANCE	IK08
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	No
DRIVE OVER	No
TEMPERED GLASS	YES
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	Aluminium Alloy 6082

ACCESSORIES


TENO-M




CODE TMSH
TYPOLGY Shade
WEIGHT 30 g
MATERIAL Aluminium 6082




CODE MS
TYPOLGY MOUNTING STRAP
WEIGHT
MATERIAL Galvanized steel



CODE SP
TYPOLGY PEG
WEIGHT
MATERIAL AISI 316L Stainless steel



CODE HC
TYPOLGY Filter
WEIGHT 3 g
MATERIAL aluminium



CODE TMBR
TYPOLGY Bracket (for installation)
WEIGHT 78 g
MATERIAL AISI 316L Stainless steel