

TENO-S

IP67 IK08 CE



CRI
80



L80B10
50.000h



CODE TE01

TYPOLGY Projector

INSTALLATION POSITION Wall, ceiling and ground mounting



INSTALLATION LOCATION Outdoor

TENO-S

POWER 2.2W

WEIGHT 0.13KG

DIMENSION 56mm

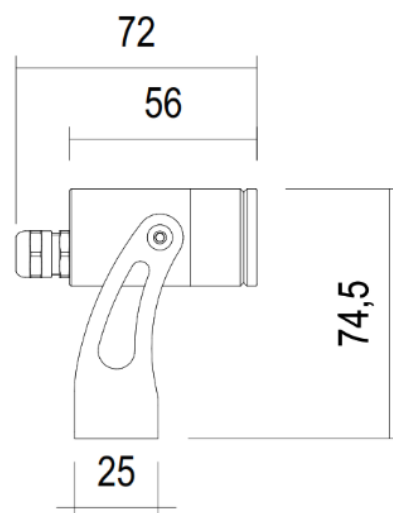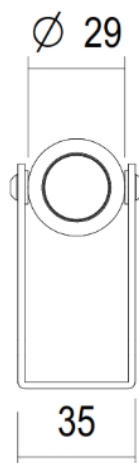

ELECTRICAL FEATURES

POWER CONSUMPTION	2.2W for 24Vdc or 1.6W for C.C
POWER SUPPLY	24Vdc or C.C
POWER SUPPLY UNIT	Remote
DIMMING	On/Off
CONNECTION	Parallel For 24 Vdc / Series for C.C

LIGHTING FEATURES


LED COLOR	2200K, 2700K, 3000K, 4000K
CRI	>80
OPTICS	10°, 36°, 60° 67x16
TOTAL DELIVERD LUMENS	152 lm (10°), 130 lm (36°), 121 lm (60°)
TOTAL NOMINAL LUMENS	180 lm (2700K), 190 lm (3000K), 200 lm (4000K)
AVERAGE LED LIFE	50.000h L80 B10

GENERAL FEATURES


OPERATING TEMPERATURE	50°C
INGRESS PROTECTION	IP67
IMPACT RESISTANCE	IK08
GLOW WIRE TEST	960°C
SCREEN TEMPERATURE	40° @ Ta = 25°
APPLIANCE CLASS	I
WALKOVER	NO
DRIVE OVER	NO
TEMPERED GLASS	Yes
POWER CABLES	Provided with 50 cm cable
STANDARD SAFETY	/
PHOTOBIOLOGICAL SAFETY	GR1
MATERIAL	Aluminium Alloy 6082

ACCESSORIES


TENO-S




CODE TSSH
TYPOLGY Shade
WEIGHT 17 G
MATERIAL ALUMINIUM 6082




CODE MS
TYPOLGY MOUNTING STRAP
MATERIAL Galvanized steel



CODE SP
TYPOLGY PEG
WEIGHT
MATERIAL AISI 316L Stainless Steel



CODE HC
TYPOLGY Filter
WEIGHT 0.14 g
MATERIAL Aluminium



CODE TSBP
TYPOLGY Bracket (for installation)
WEIGHT 43 g
MATERIAL AISI 316L Stainless Steel