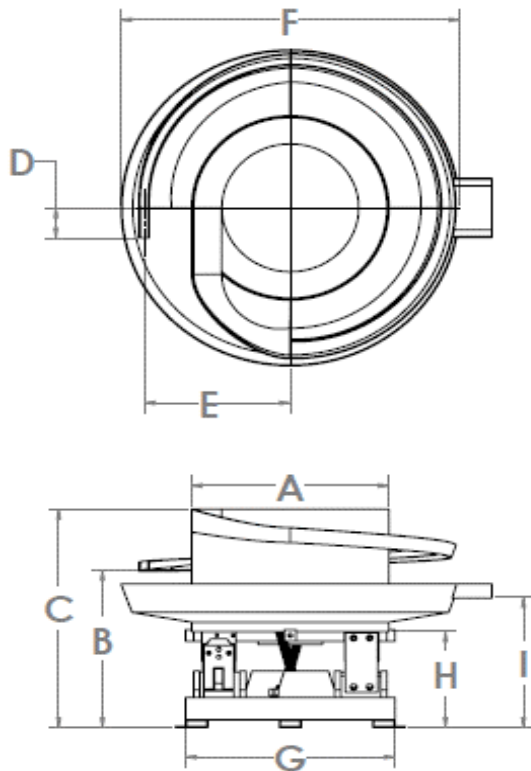


"TYPICAL" DIMENSION FOR UTI FEEDERS

FOR REFERENCE ONLY

A	B	C _{MAX}	D	E	F _{MAX}	G	H	I
6" I.D.	10.00" +/-2"	11"	TBD	5" +/- 1"	12"	6"	5.5"	NA
8" I.D.	10.00" +/-2"	14"	TBD	6" +/- 1"	14"	8"	7.75"	NA
10" I.D.	10.00" +/-2"	16"	TBD	8" +/-1"	17"	10"	7.75"	10.5" +/-1"
12" I.D.	14.00" +/-2"	20"	TBD	9" +/-1"	22"	12"	10"	13.00" +/-1"
15" I.D.	14.00" +/-2"	22"	TBD	11" +/-1"	27"	15"	10"	14.25" +/-1"
18" I.D.	17.00" +/-2"	28"	TBD	12" +/-1"	32"	18"	12"	15.50" +/- 1"
21" I.D.	19.00" +/-2"	30"	TBD	16" +/-1"	37"	23"	12.75"	17.00" +/-1"
24" I.D.	19.00" +/-2"	30"	TBD	18" +/-2"	42"	26"	12.75"	17.00" +/-1"
27" I.D.	21.00" +/-2"	37"	TBD	20" +/-2"	46"	29"	12.75"	19.25" +/-1"
30" I.D.	22.00" +/-2"	38"	TBD	23" +/-2"	55"	32"	13.25"	19.50" +/-1"
36" I.D.	23.00" +/-2"	40"	TBD	26" +/-2"	70"	42"	14.375"	20.50" +/-1"
42" I.D.	25.00" +/-2"	46"	TBD	36" +/-2"	76"	48"	15.375"	22.00 +/- 1"

6" - 8" DIAMETER, 4 POST, DUAL COIL, AND 2" DRIVE PLATE

18" - 24" DIAMETER, 4 POST, DUAL COIL, AND 3" DRIVE PLATE

27" - 30" DIAMETER, 4 OR 6 POST, DUAL OR TRIPLE COIL, AND 3" PLATE

36" DIAMETER, 6 POST, TRIPLE COIL, AND 3" DRIVE PLATE

42" DIAMETER, 8 POST, QUAD COIL, AND 4" DRIVE PLATE

*TOP DOWN FEEDERS CAN BE TALLER THAN "C" DIMENSION

B DISCHARGE HEIGHT FROM TABLE SURFACE
H DRIVE HEIGHT
I PAN FEED HEIGHT FROM TABLE SURFACE

