

## POWERLINE 1000S DUO



Internet everywhere from any power socket!

With Powerline 1000S easily create a highspeed home network using your home's existing electrical wiring at speeds up to 1000 Mbit/s.

Just connect your Powerline to your internet modem and your internet connection becomes available from any power socket using the other Powerline.

Equipped with an extra power socket, no outlet goes to waste.



#### **Performance**



- Kit of 2 Powerline 1000S adapters
- Speed up to 1000 Mbit/s
- HomePlug™ AV standard
- Perfect for IPTV, HD video streaming and gaming
- Works with any standard Modem or Router

### **Coverage & Reliability**



- Range of 300 meters over electrical circuit
- Automatic power saving mode reduces consumption by up to 85%
- No configuration! No expertise required! Plug & Play installation in a minute

### **Security**



- 128 bit AES encryption for network security and data protection
- Connect & Secure button for an optimum network security

### Connections



- Integrated extra power socket with power output of up to 16 A
- 1xEthernet LAN port to connect any computer, set-top-box, Smart TV, game console, ...



# POWERLINE 1000S DUO

#### Hardware

Standards: HomePlug™ AV2, HomePlug™ AV, IEEE 802.3, IEEE 802.3u

Interface Ethernet: 1x port Ethernet (10/100Mbps)

Extra Power Socket: 250 V AC 16 A max.

Button: Connect & Secure

LEDs: Power, Powerline, Ethernet

Power: 120 - 240 V, 50/60 Hz Security: 128 bit AES

Range: Up to 300 meters over electric circuit

Frequency:  $2 \text{ MHz} \sim 68 \text{ MHz}$ Size (WxDxH):  $64 \times 74 \times 121 \text{ mm}$ 

Weight in kg: 0,16

### Other specifications

Certification

Package Contents

2x Powerline Adapters

2x Ethernet Cables


1x Quick Installation Guide

System Requirements RJ45 Ethernet Connection

Environment Operating Temperature:  $0 \,^{\circ}\text{C} \sim +40 \,^{\circ}\text{C}$ Storage Temperature:  $-40 \,^{\circ}\text{C} \sim +70 \,^{\circ}\text{C}$ 

Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing



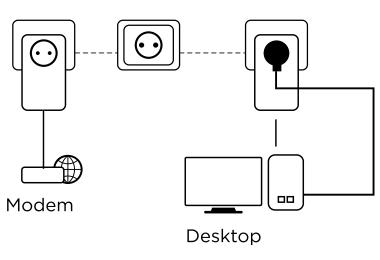

- 1. Connecteur Ethernet LAN / WAN
- 2. Pair / Reset (Connect & Secure)
- 3. Indicateurs LED

EAN PL1000SDUOEU: 9120072379345

PCB: 10