


10 REASONS PEOPLE WILL OR WON'T READ YOUR SITE SURVEY REPORTS !!




CORPORATE WI-FI
PERFORMANCE &
SECURITY REPORT
ULTIMATE WI-FI UNIFICATION REPORT
WI-FI REPORT
12 MS




1 Delivery Format

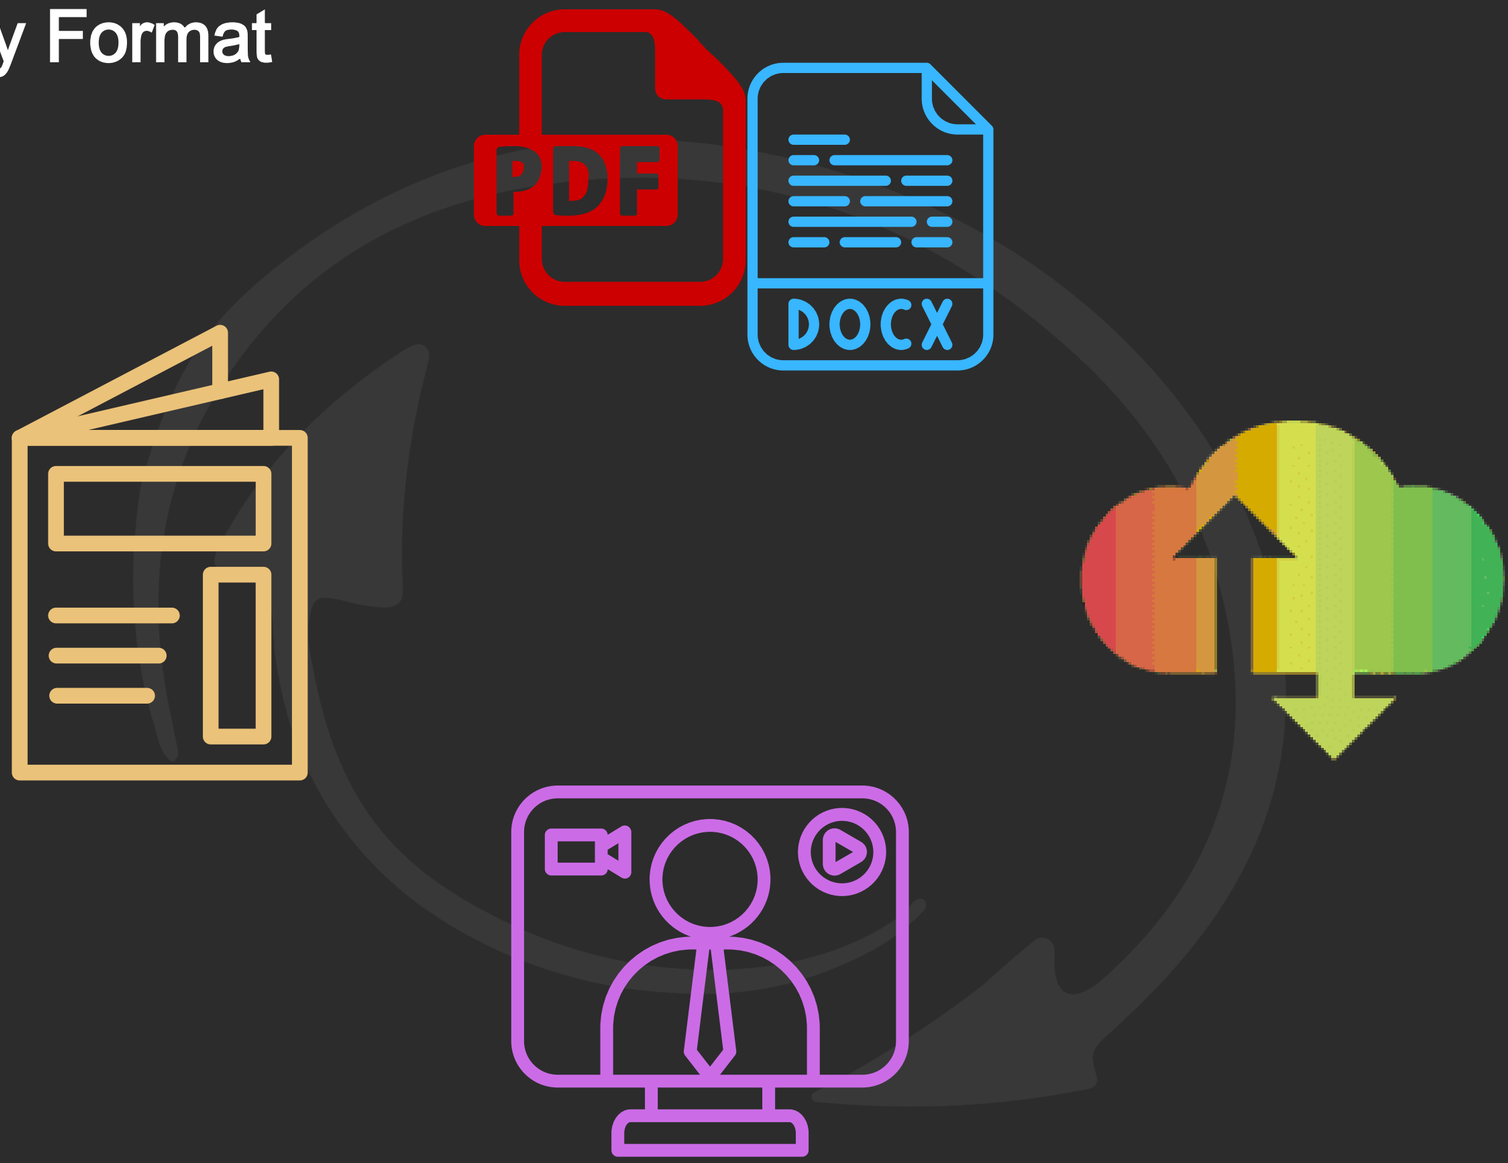

2 Standarized Reporting Format



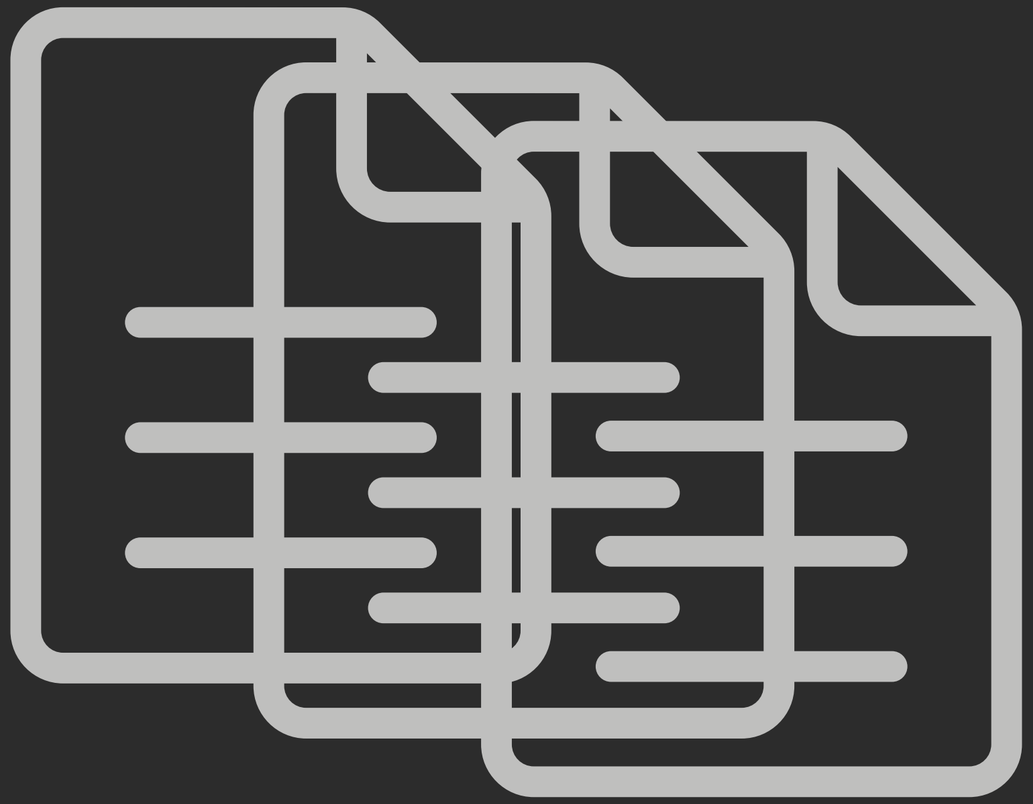


3 Report Length

Wi - Fi is OK



4 Methology Documentation

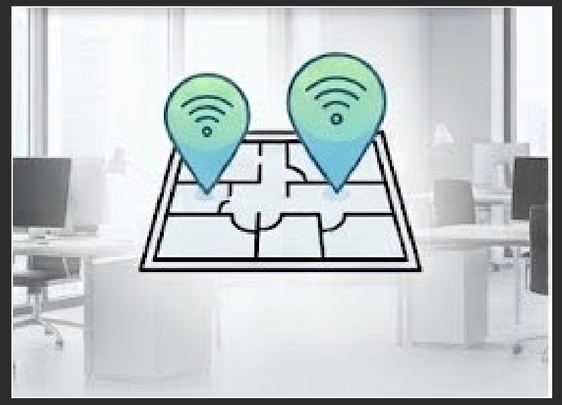

- Predictive Design
- Modeling
- Simulation




- APoS Site Survey



- Validation Survey
- Post-Implementation




- Health Check
- Optimization
- Pre-Deployment

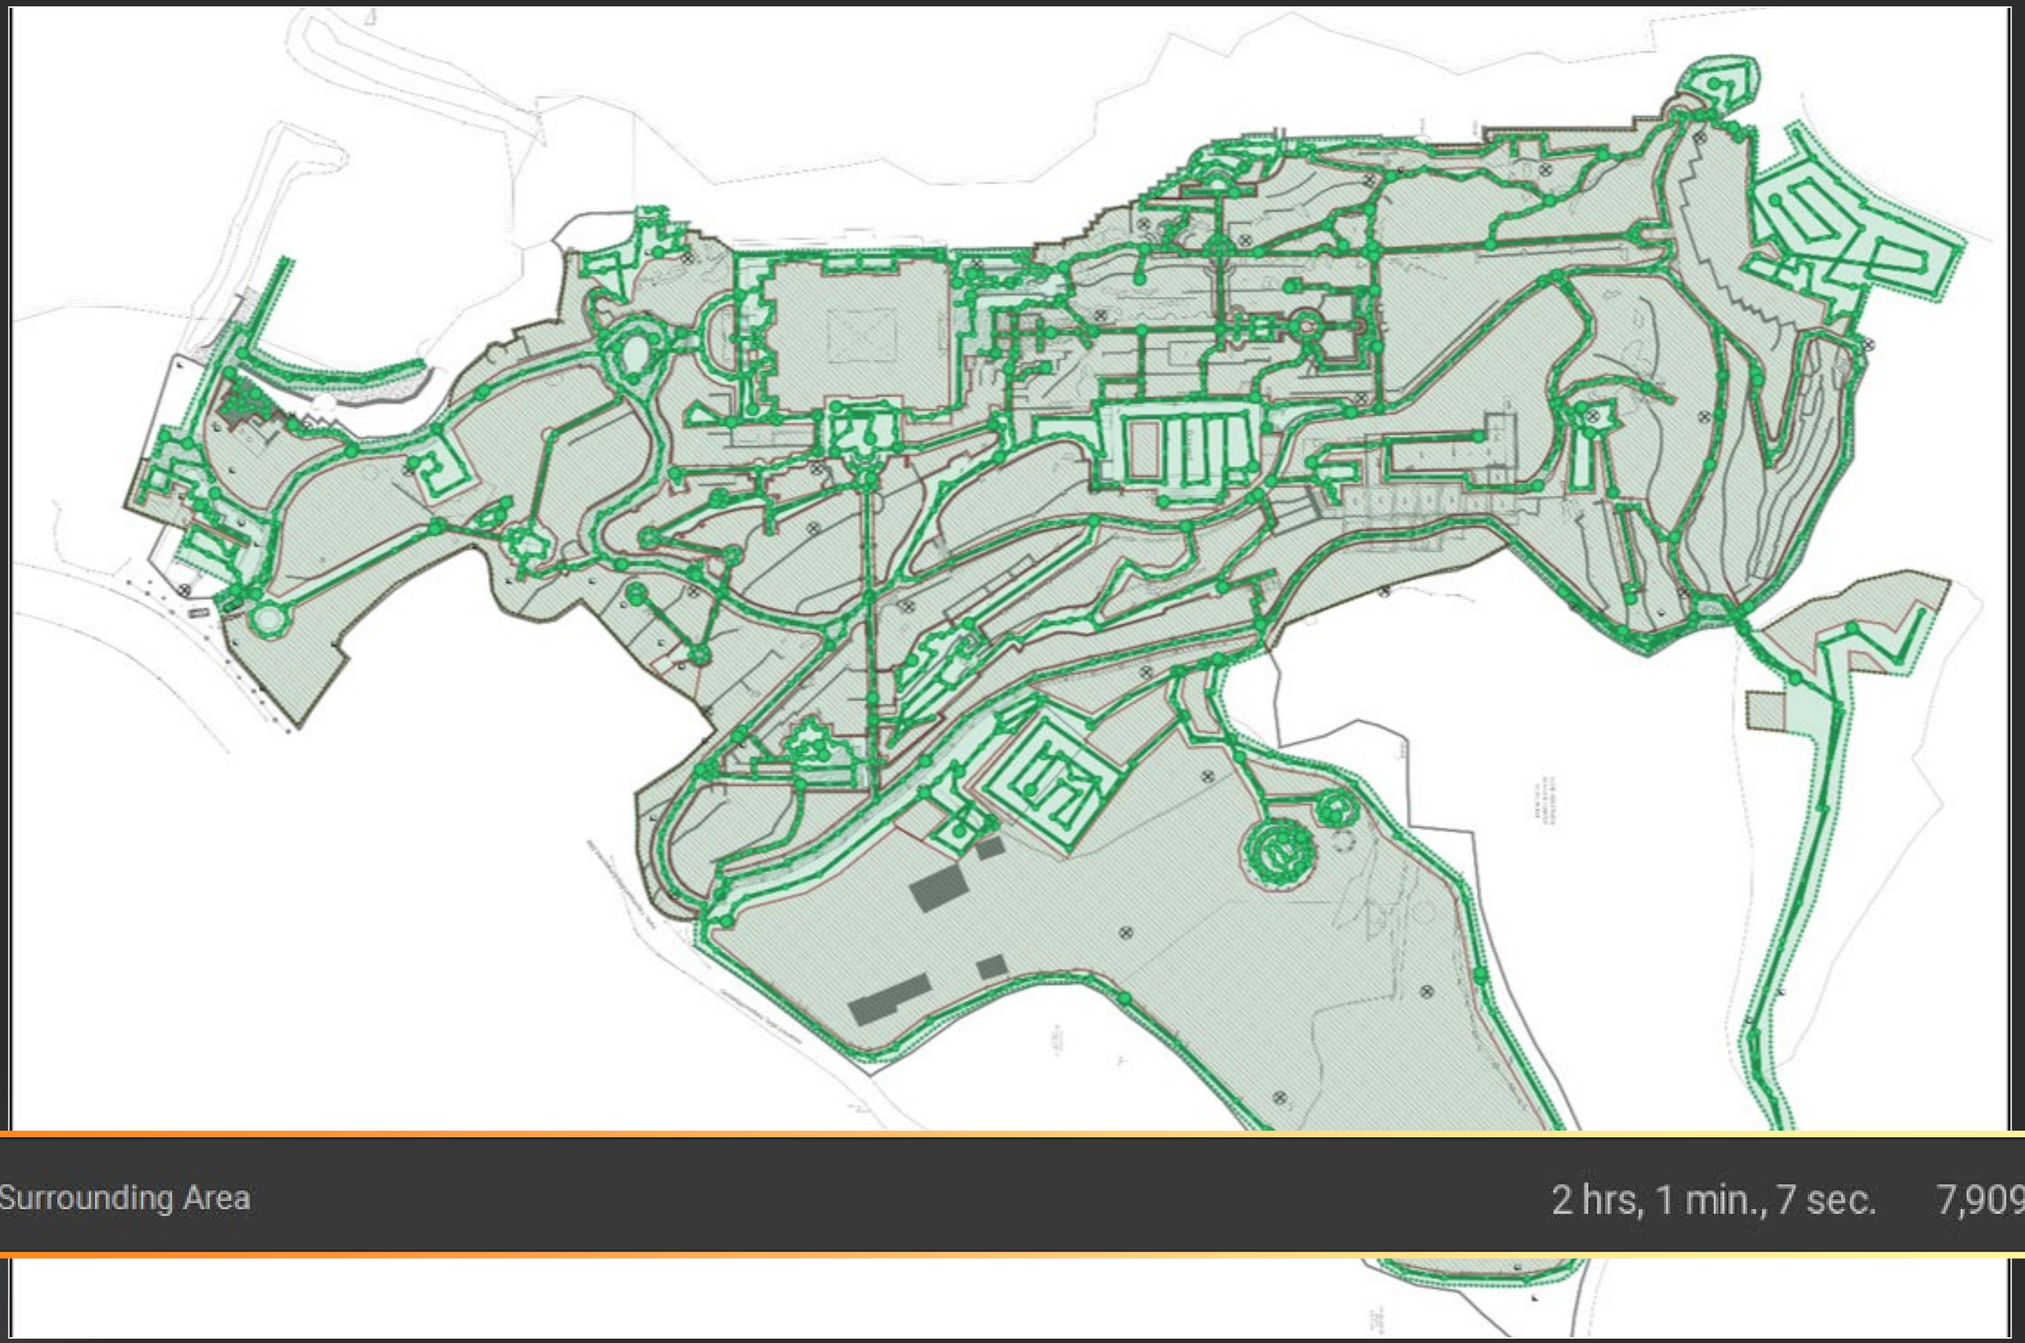

Surrounding Area 2 hrs, 1 min., 7 sec. 7,909 m

5 Use of Technical Language

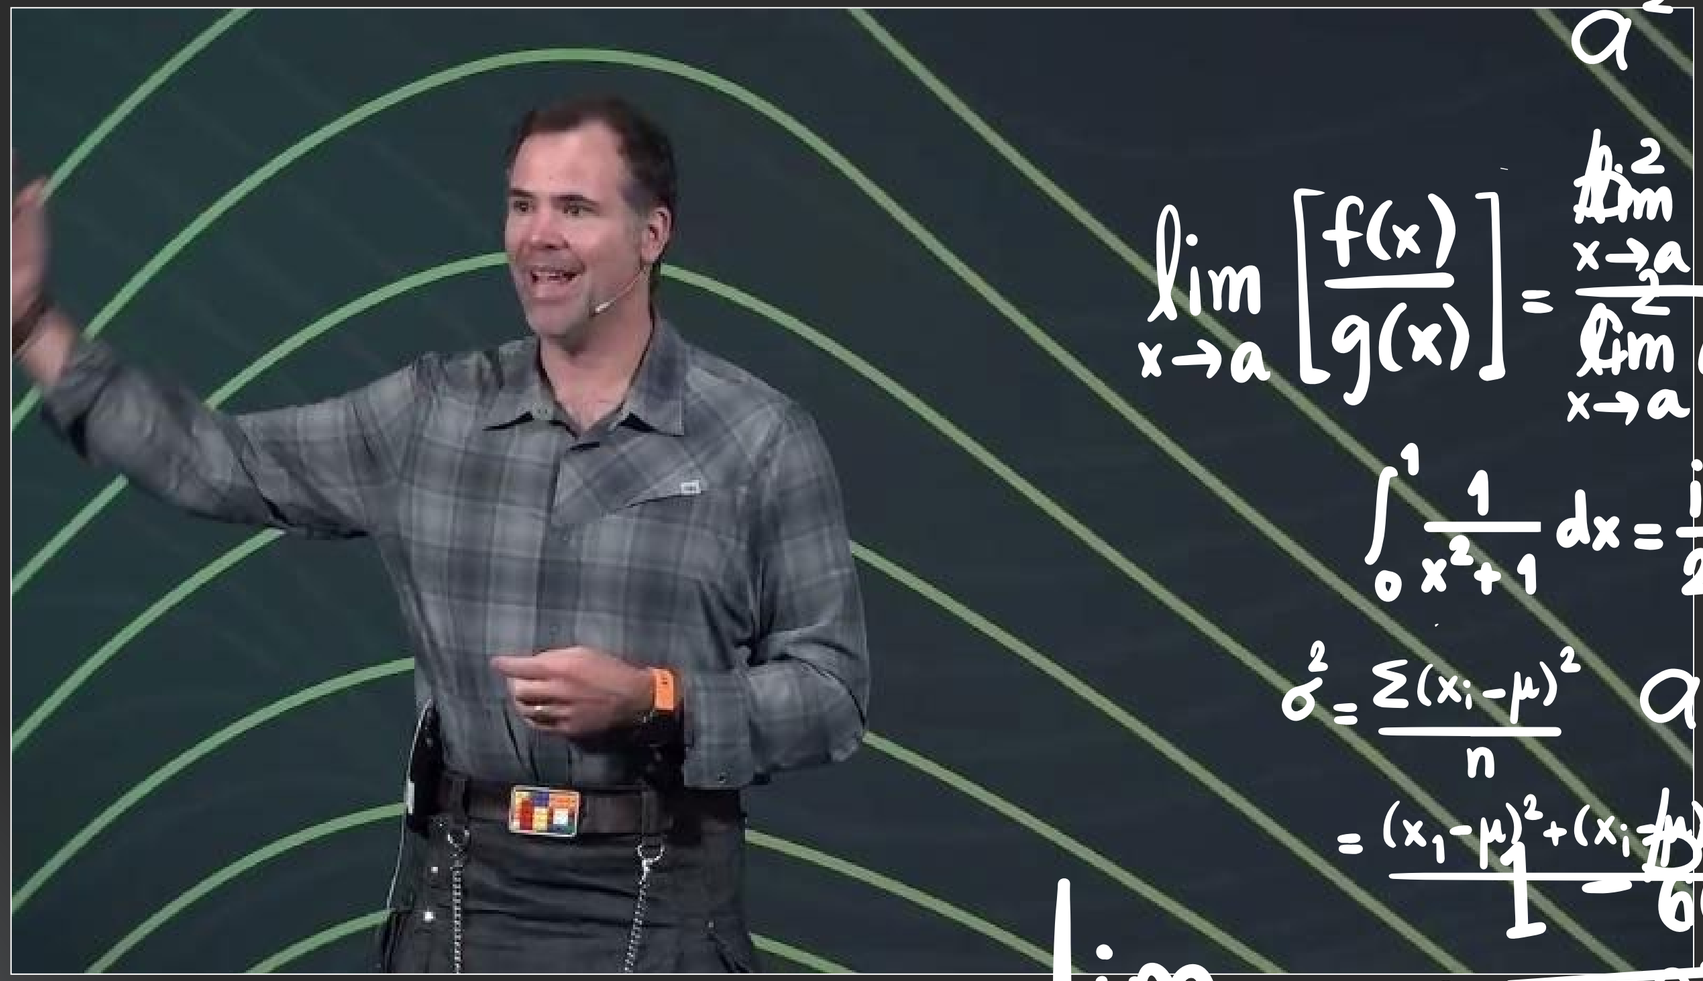

6 Cost & Pricing Details




PROFESSIONAL_NET
AP-AC-LR
PROFESSIONAL_NET
AP-AC-LR
PROFESSIONAL_NET
AP-AC-LR
A

7 Vendor & Product Recommendations




8 Highlighting Problems





Visual Example #1 (-67dB check)

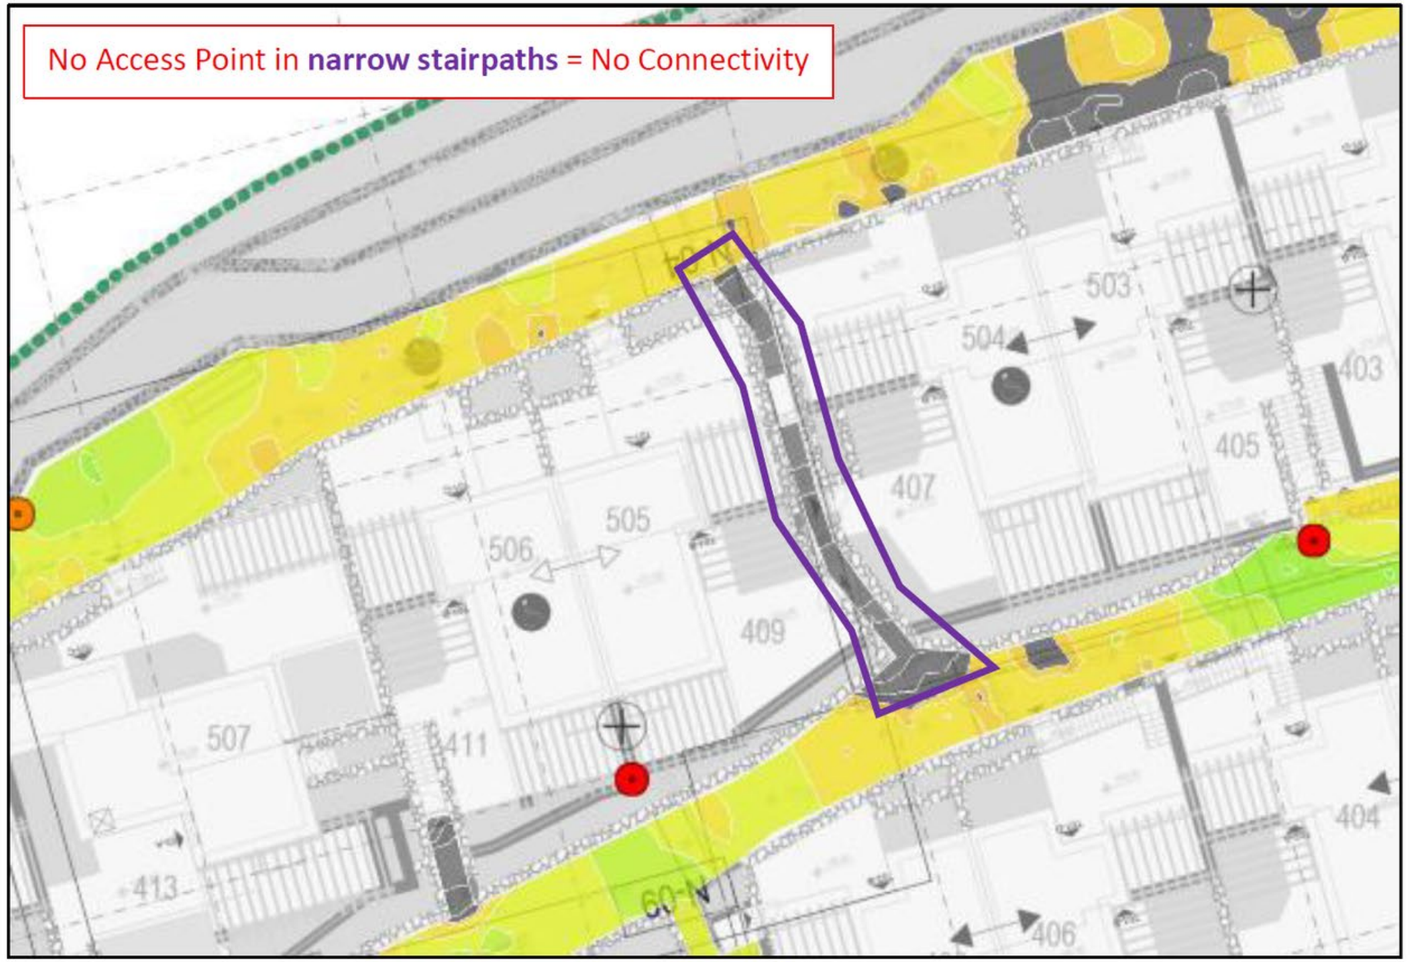

9 Data Overflow

- Visualizations of all bands
- All kinds of heatmaps
- Random Device Screenshots
- Not enough filtering
- ……..




10 Credibility





KEY TAKEAWAYS

- Whether your report gets read is decided before the 1st page.
- You report is not precious for everyone.
- Customization wins.
- You may like YOUR job, not everyone does like YOUR job.

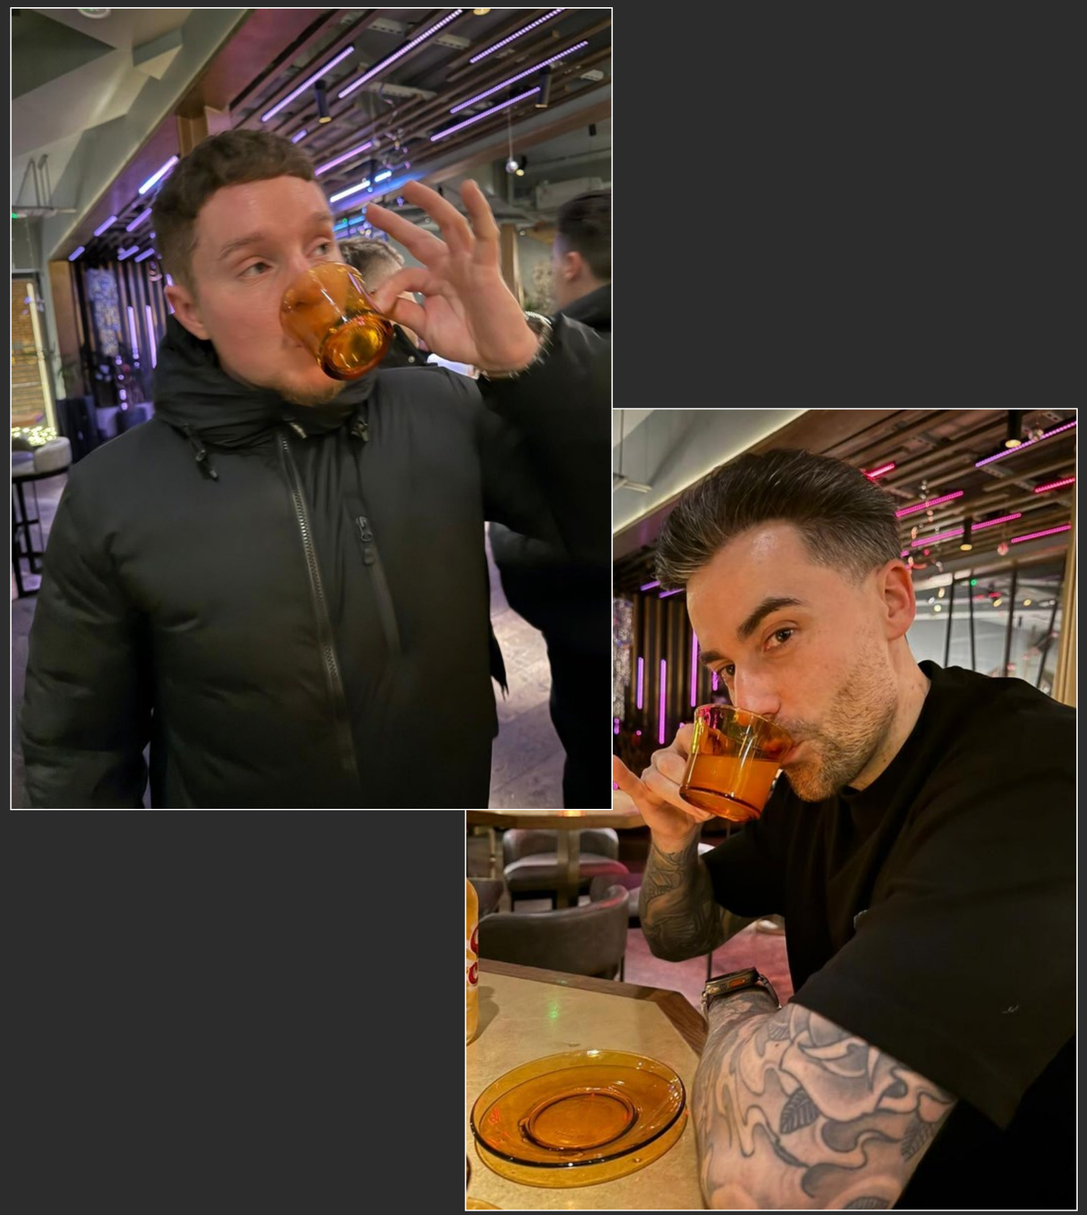

8.2.3 Γραφική Αναπαράσταση των Μεταβλητών για τον Α΄ όροφ (Visualisations)

Ισχύς σήματος για την μπάντα των 5 GHz band στον 1ο όροφο

Εξασφάλιση κάλυψης σήματος σε όλα τα ενεργά σημεία για τα 5 GHz.





Μελέτη Σχεδιασμού και Βελτιστοποίησης Ασύρματου Δικτύου Χώρων Γραφείου (CT15)

8.2.3 Γραφική Αναπαράσταση των Μεταβλητών για τον Α΄ όρ (Visualisations)

Ισχύς σήματος για την μπάντα των 5 GHz band στον 1ο όροφο

Εξασφάλιση κάλυψης σήματος σε όλα τα ενεργά σημεία για τα 5 GHz.





Μελέτη Σχεδιασμού και Βελτιστοποίησης Ασύρματου Δικτύου Χώρων Γραφείου (CT15)

8.2.3 Γραφική Αναπαράσταση των Μεταβλητών για τον Α΄ όροφο (Visualisations)

Ισχύς σήματος για την μπάντα των 5 GHz band στον 1ο όροφο

Εξασφάλιση κάλυψης σήματος σε όλα τα ενεργά σημεία για τα 5 GHz.








Comments for 1st Floor RSSI Assessment: There are several SSIDs transmitted by a portion of APs that shall be removed since they are adding up RF harmful SSID overhead, increasing airtime utilisation. Will refer to this in a more detailed way into the Wireless Analysis Chapter below.



THANK YOU

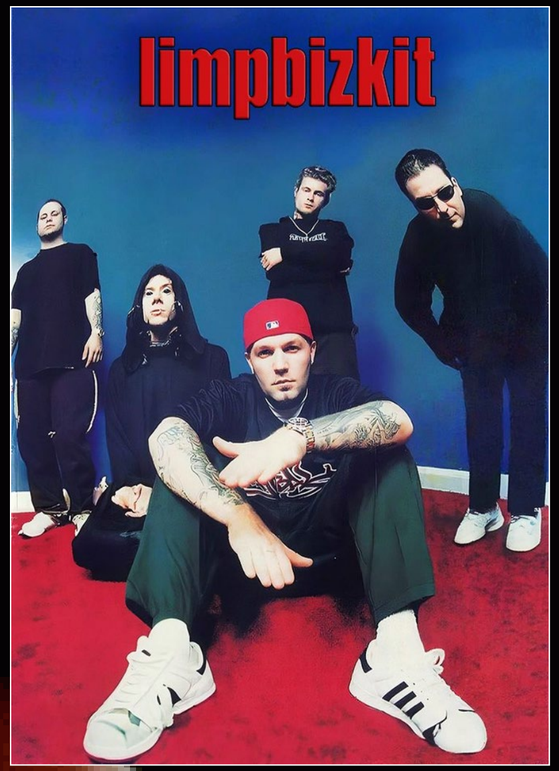


wirelessLAN
PROFESSIONALS
CONFERENCE


Wi-Co Bar


ekahau
openreality


wirelessLAN
PROFESSIONALS
CONFERENCE