

RC DECAP 1

POWERFUL METHYLENE CHLORIDE FREE PAINT STRIPPER

Facade cleaning and stripping



ADVANTAGES OF RC DECAP 1

- ✓ Quickly reacts with substrate
- ✓ Extremely suitable for most paints
- ✓ Completely water-soluble
- ✓ Ideal viscosity for facades
- ✓ No rinsing required

Description

RC DECAP 1 is a high-performance, thixotropic paint remover designed for the removal of facade paints, varnishes, adhesive residues and various coatings on concrete, wood and mineral substrates.

Formulated from a blend of solvents and plasticisers, the product adheres strongly to vertical and horizontal surfaces. Its gel structure prevents premature drying and ensures excellent water rinseability.

Properties

- Fast processing time
- Suitable for most common paint systems
- Ready-to-use product
- Fully water-soluble
- Thixotropic – ideal for vertical applications
- No rinsing generally required

Substrate

Protect all non-treated elements (windows, glass, metal frames, sensitive surfaces).

Prior to the application, a test must be carried out to be able to evaluate the layer thickness and processing time of the product.

Application instructions

When using a brush, we recommend a brush with nylon bristles. Some plastic brushes can react, nylon on the other hand will not be affected.

RC DECAP 1 must be applied sufficiently so that it is thicker than the paint that has to be removed. Processing time for paints is 15 to 45 minutes, depending on the type of paint and the thickness of the paint layers (to be determined experimentally).

Very intensive sunlight and strong wind can cause RC DECAP 1 to dry too quickly. In these cases, apply more stripper to the dried pieces or shield them sufficiently. We advise (for exterior walls) to start at the bottom and work upwards from there.

RC DECAP 1 can be used in temperatures from 10°C to 30°C. In case of extremely hot temperatures, it may be necessary to press a suitable plastic foil into the RC DECAP 1 to prevent the product from drying out.

Consumption

± 300 to 600 g/m², depending on the substrate. The exact consumption must be determined experimentally.

Technical information

Color	Colorless / light yellow
-------	--------------------------

Odor	Little
Soluble in water	Yes
Density (20°C)	0,97 g/cm ³
Form	Gel
Basis	Solvents

Security

Consult the most recent Safety Data Sheet.

Remarks

- In case of extremely hot temperatures, it may be necessary to press a suitable plastic foil into the RC DECAP 1 to prevent the product from drying out.
- Not suitable for mineral paints such as lime paint and silicate paint.

Cleaning of equipment

Immediately after use with water.

Storage / Shelf life


- Keep only in the original container in a cool, well-ventilated place.
- 6 months after production in original closed packaging.

Packaging

5 liters (item no. 10206)

10 liters (item no. 10207)

Photos

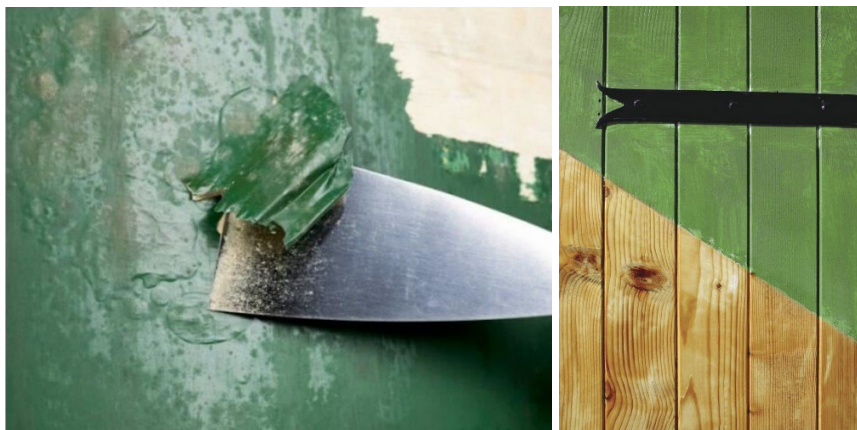

Legal Notes

The information and recommendations contained in this document have been prepared in good faith based on the current knowledge and experience of Reynchemie, concerning products that are correctly stored, handled and applied under normal conditions and in accordance with our guidelines. Since practical conditions, materials and substrates may vary from one application to another, Reynchemie cannot guarantee the merchantability or suitability of the product for a particular purpose. The user remains responsible for carrying out preliminary tests to verify the compatibility of the product with the intended application. All stated values and properties are average results determined at 20 °C; reasonable deviations are acceptable. Products used in combination with this product within the same application system (such as preparation or finishing products) must always be applied according to the instructions provided in their respective technical data sheets. Reynchemie reserves the right to modify the composition or properties of its products without prior notice. Except where mandatory legal provisions apply, Reynchemie accepts no liability for damage resulting from improper application of its products or from failure to comply with the provided instructions. Third-party property rights must always be respected. All orders are accepted under the applicable sales and delivery conditions. Users must always consult the latest version of the local Technical Data Sheet (TDS) and Safety Data Sheet (SDS) for the respective product; copies will be provided upon request if not available on our website www.reynchemie.com. This document supersedes all previous versions.