

REGAL - LED POWER ADJUSTABLE LINEAR FIXTURE



Mechanical:

Ingress Protection : IP44 as standard
Impact Protection : IK07 as standard
Construction : White coating metal, Frosted PMMA prismatic diffuser
Mounting : Surface mounting, suspended available on request
Working Temperature : -20°C to +40°C

Electrical:

Input Voltage : 220-240VAC (50-60Hz)
Power Factor : >0.9
Driver : Internal, non-dimmable
Class : I

Photometric:

CCT : 4000K as standard (3000K / 5000K available on request)
Beam Angle : 110°
CRI : >80
Lumen Maintenance : L80B10 > 102,000hrs.
SDCM : <3

Conformance:




At a Glance:



FEATURES & BENEFITS

- Efficiency: 140 lm/W
- Quick and flexible installation
- Power adjustable: 20W, 25W, 31W, 36W
- One cable entry at the endcap, two cable entries at the back of the luminaire

Dimensions:

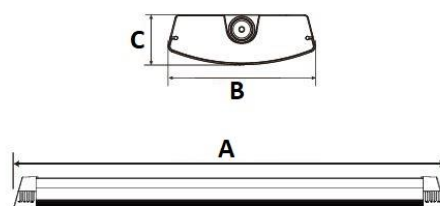

CODE*	POWER	CCT	LUMINOUS FLUX	BEAM ANGLE	DIMENSIONS (AxBxC)
VER-EB1500-XXPA-840**	See options below	4000K		110°	1495 x 155 x 52mm
VER-EB1500-20PA-840	20W		2,880 lm		
VER-EB1500-25PA-840	25W		3,500 lm		
VER-EB1500-31PA-840	31W		4,340 lm		
VER-EB1500-36PA-840	36W		5,040 lm		

* Specifications subject to change without notice

All VERDE products comply with surge immunity as specified by EN 61547:2009. However, the Verde Warranty also requires additional surge protective devices to be installed on-site against the effects caused by remote lightning strikes, inductive or capacitive coupling, and switching surge voltages. These are typically installed at the main distribution and sub-distribution panels and are to be maintained and operational always. Refer to industry experts such as www.phoenixcontact.com for further surge protection advice.