

## ACPC



The ACPC stainless steel cable tie protective channel is crafted from UV-stable, flexible, heavy metal-free PVC. Designed for use with stainless steel cable ties, particularly those with a metal ball locking mechanism, this channel maintains tension when securing two hard surfaces, preventing damage to cable outer sheaths in applications subject to vibration or movement.

## DIMENSIONS

Product	Wall Thickness (mm)	Width (mm)	Suitable for SS Strap (mm)	SS Tie Head Size (mm)	Reel Qty (m)
ACPC4/6P-UV	2	6.3	4.6	6	100
ACPC8/12.7P-UV	2	11.4	7.9	10.4	100
ACPC12/17P-UV	2	17	12.7	16	100




## KEY FEATURES

- UV stable
- Highly flexible
- Colour: Black, other colours on request
- Custom length cutting available upon request
- Easy to use

## APPLICATION

- Works with stainless steel strapping or ties.
- ACPC channels prevent stainless steel ties from chafing the PVC outer sheath of wiring harnesses.

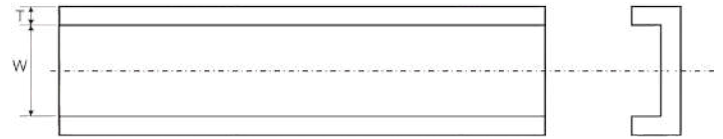

## TECHNICAL DATA

Properties	Test Methods	Typical Values
Hardness	ASTM D 2240	Shore "A", 90
Operating temp. (°C)		-15 to 70
Tensile strength (MPa)	SANS 60811-1-1	16.1
Elongation (%)	SANS 60811-1-1	200
Heatshock (°C)	SANS 60811-3-1 (150 °C x 1 hr)	Comply
Volume resistivity (Ω/cm)	SANS 5526	2.4 x 10 <sup>12</sup>

