

# 2022 JCB 220X LC

4763 Hours



- HYDRAULIC QUICK HITCH
- 1 BUCKET



## USED TRACKED EXCAVATOR | JCB 220X LC

Our Ref: N/A    Serial No: 2874735




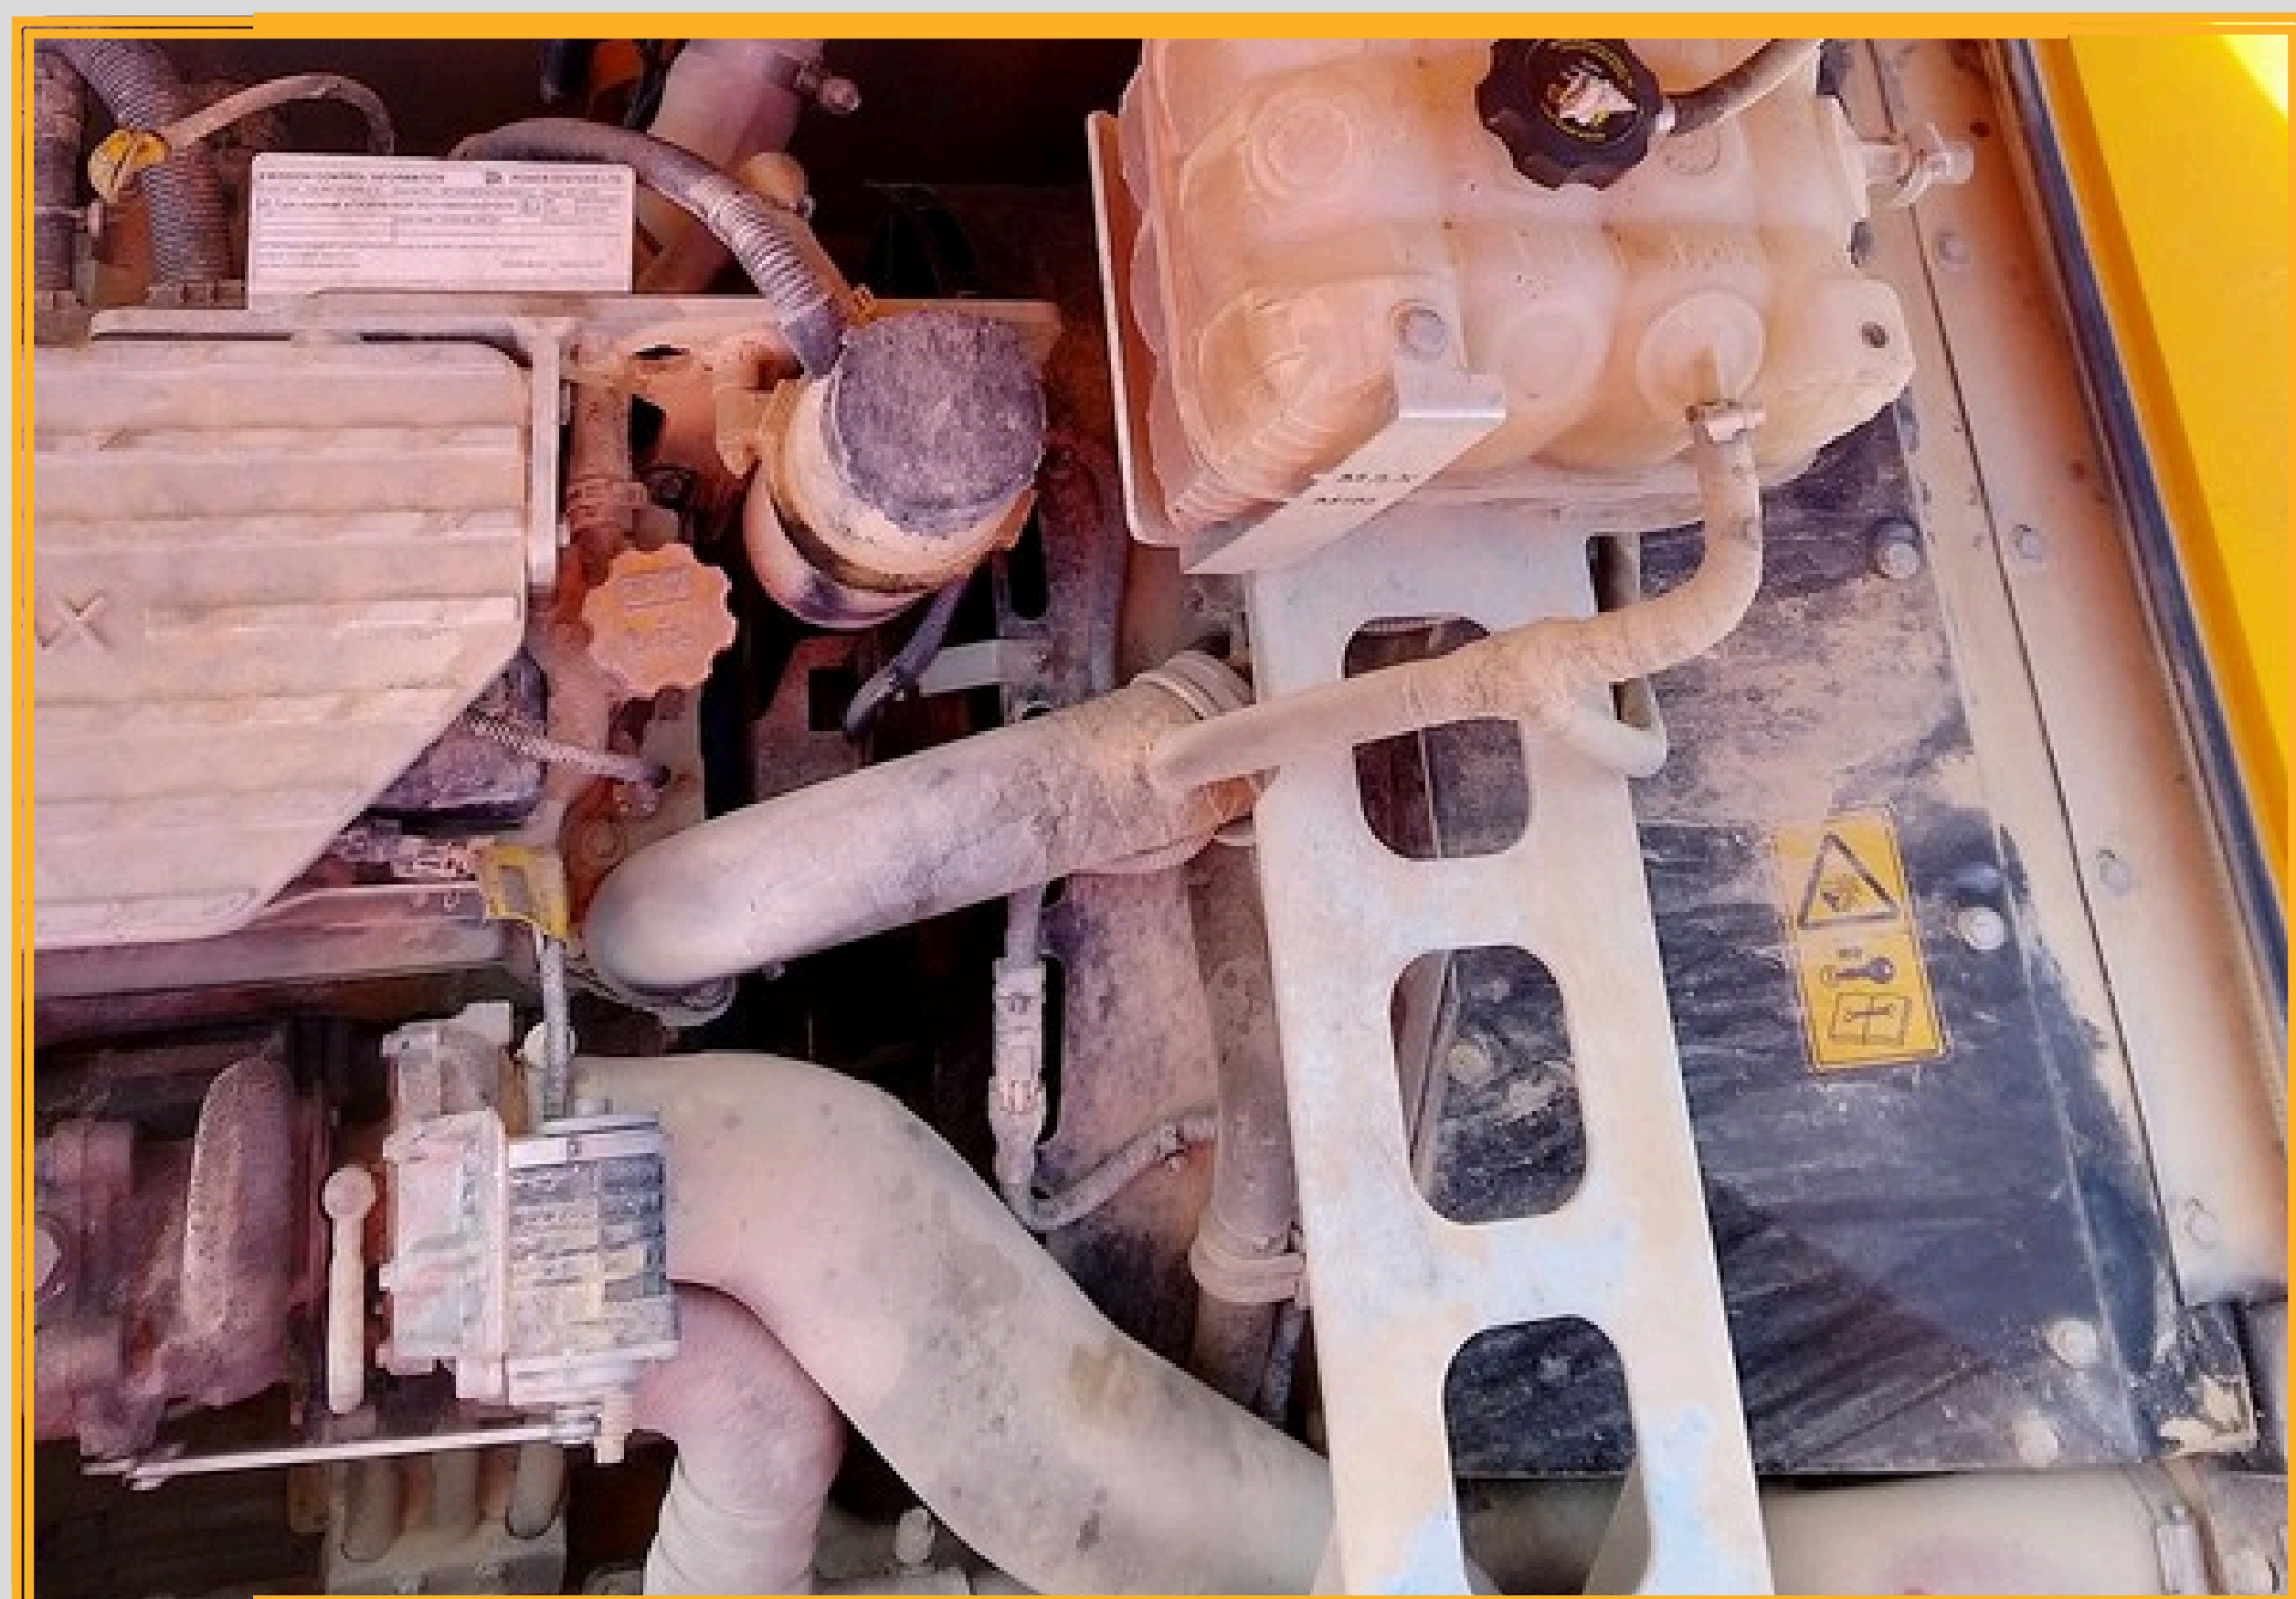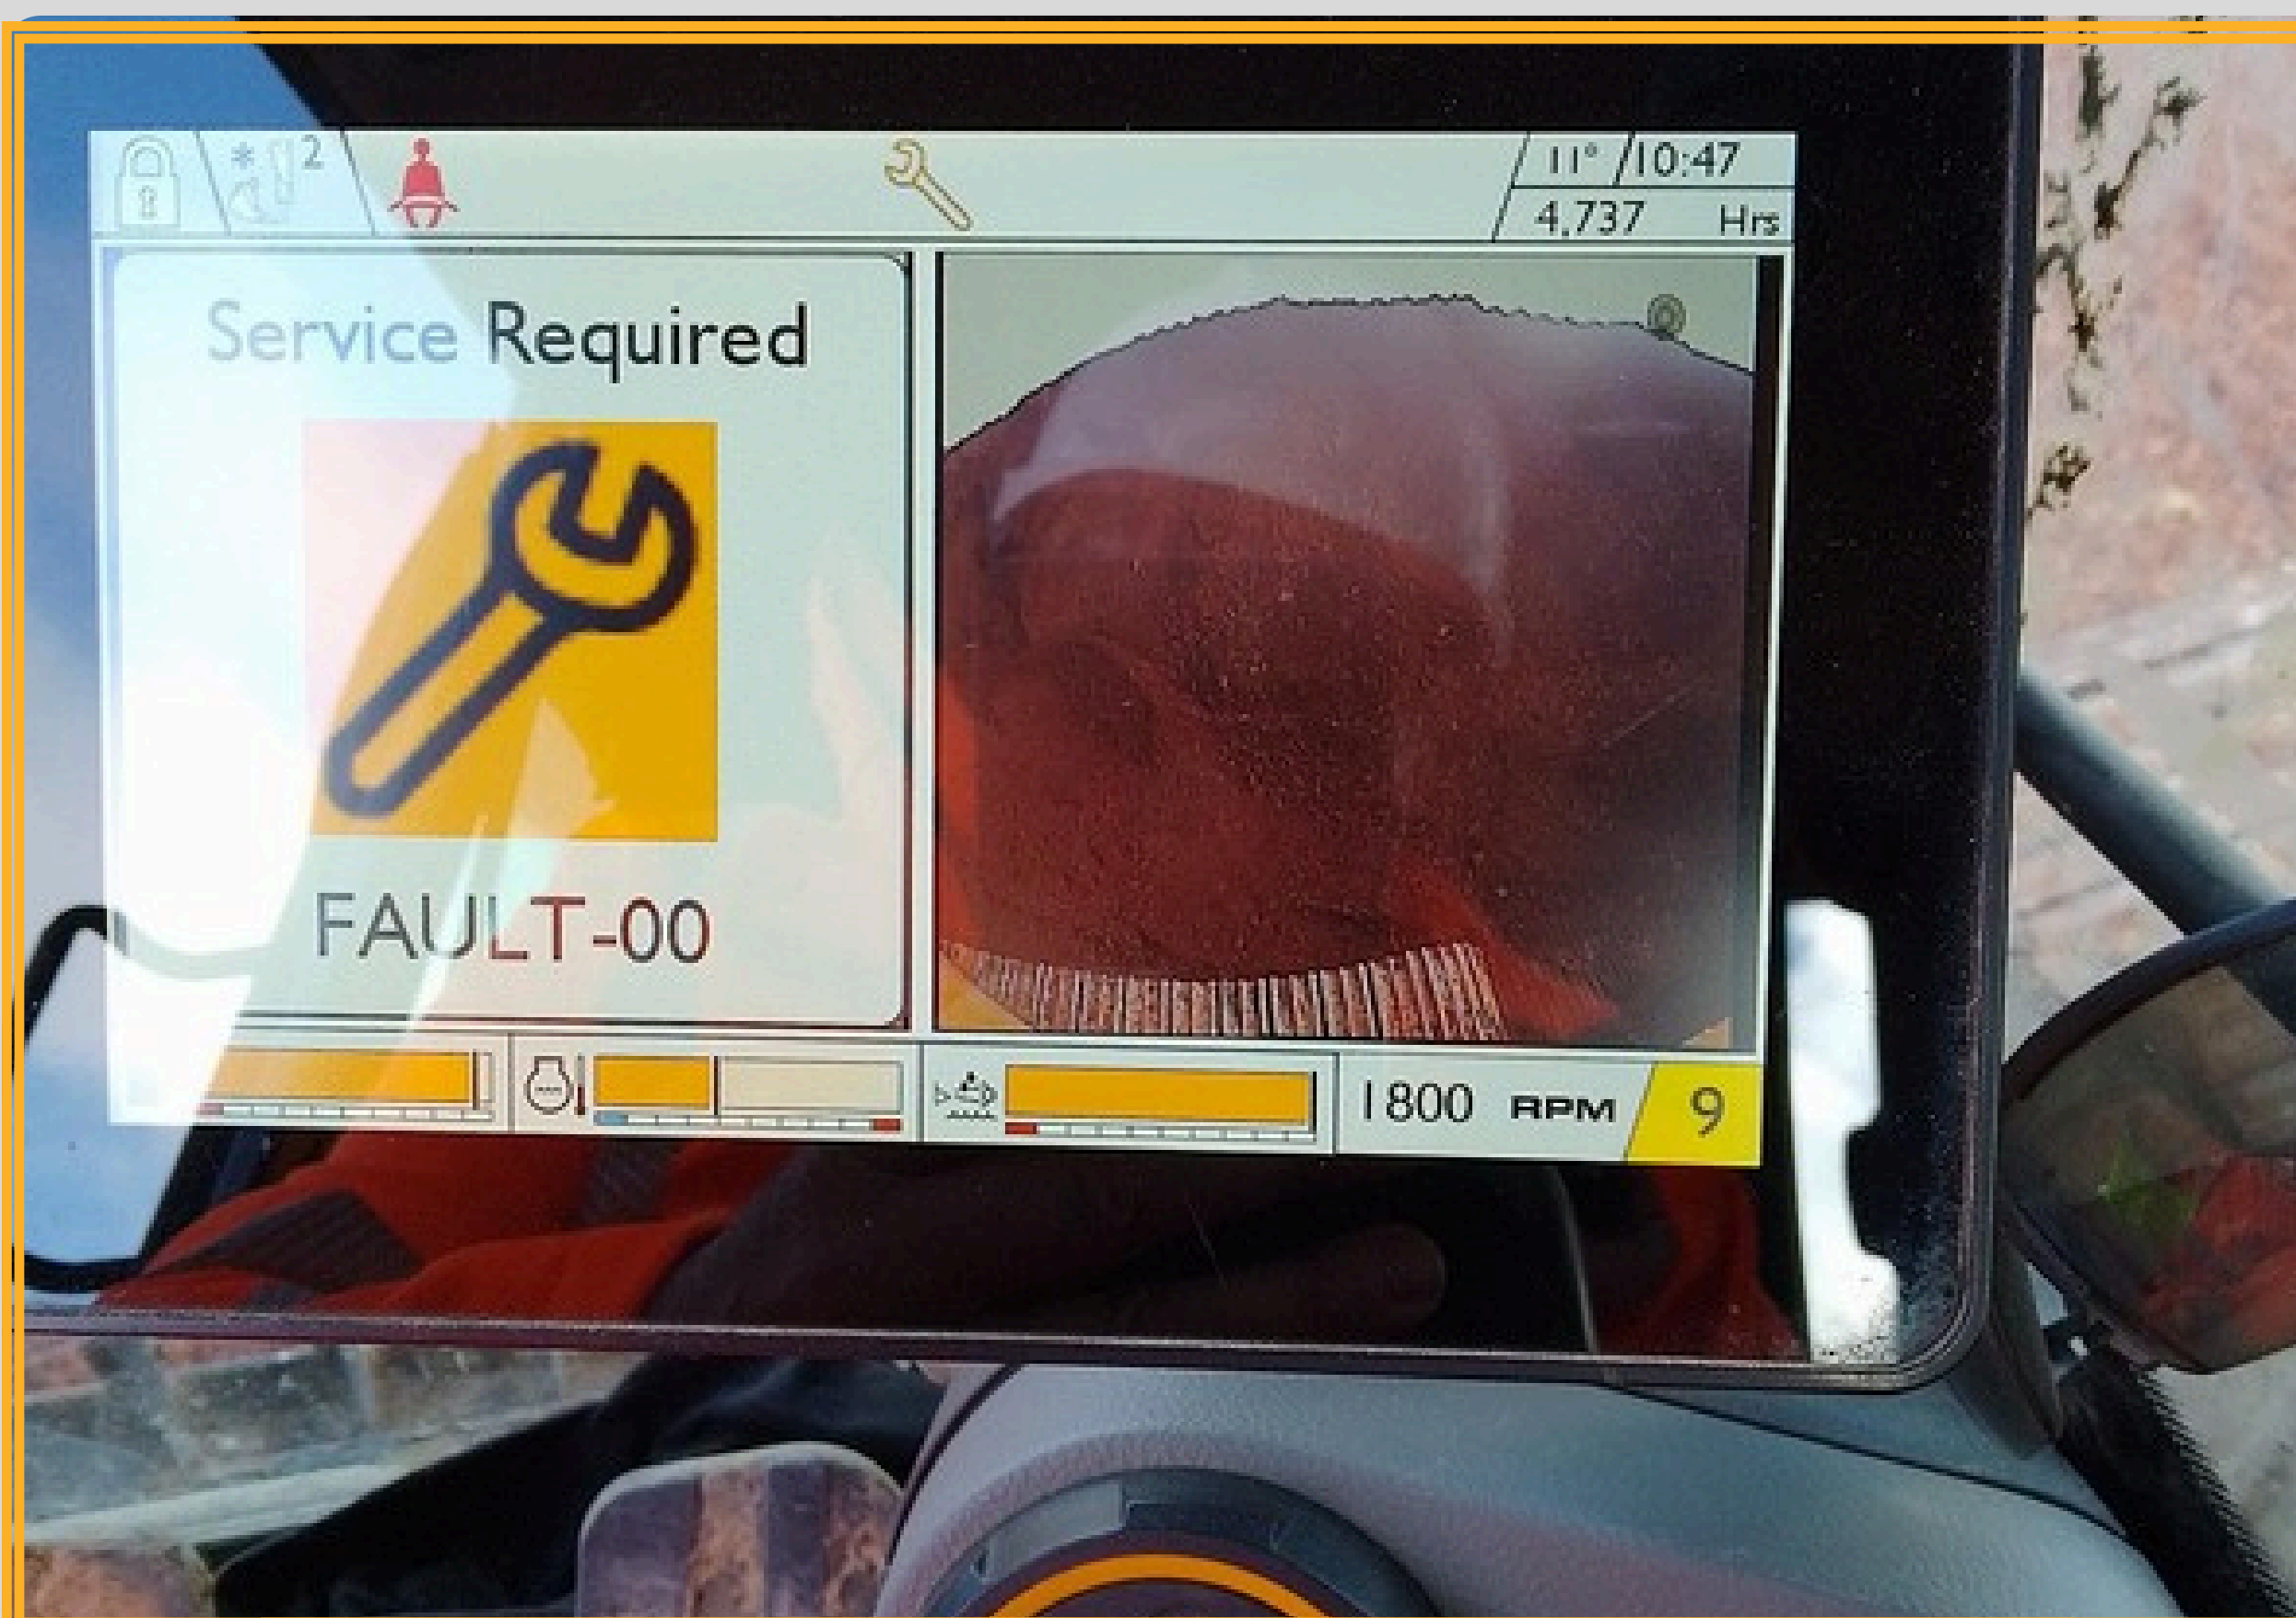

# USED TRACKED EXCAVATOR | JCB 220X LC

Our Ref: N/A    Serial No: 2874735



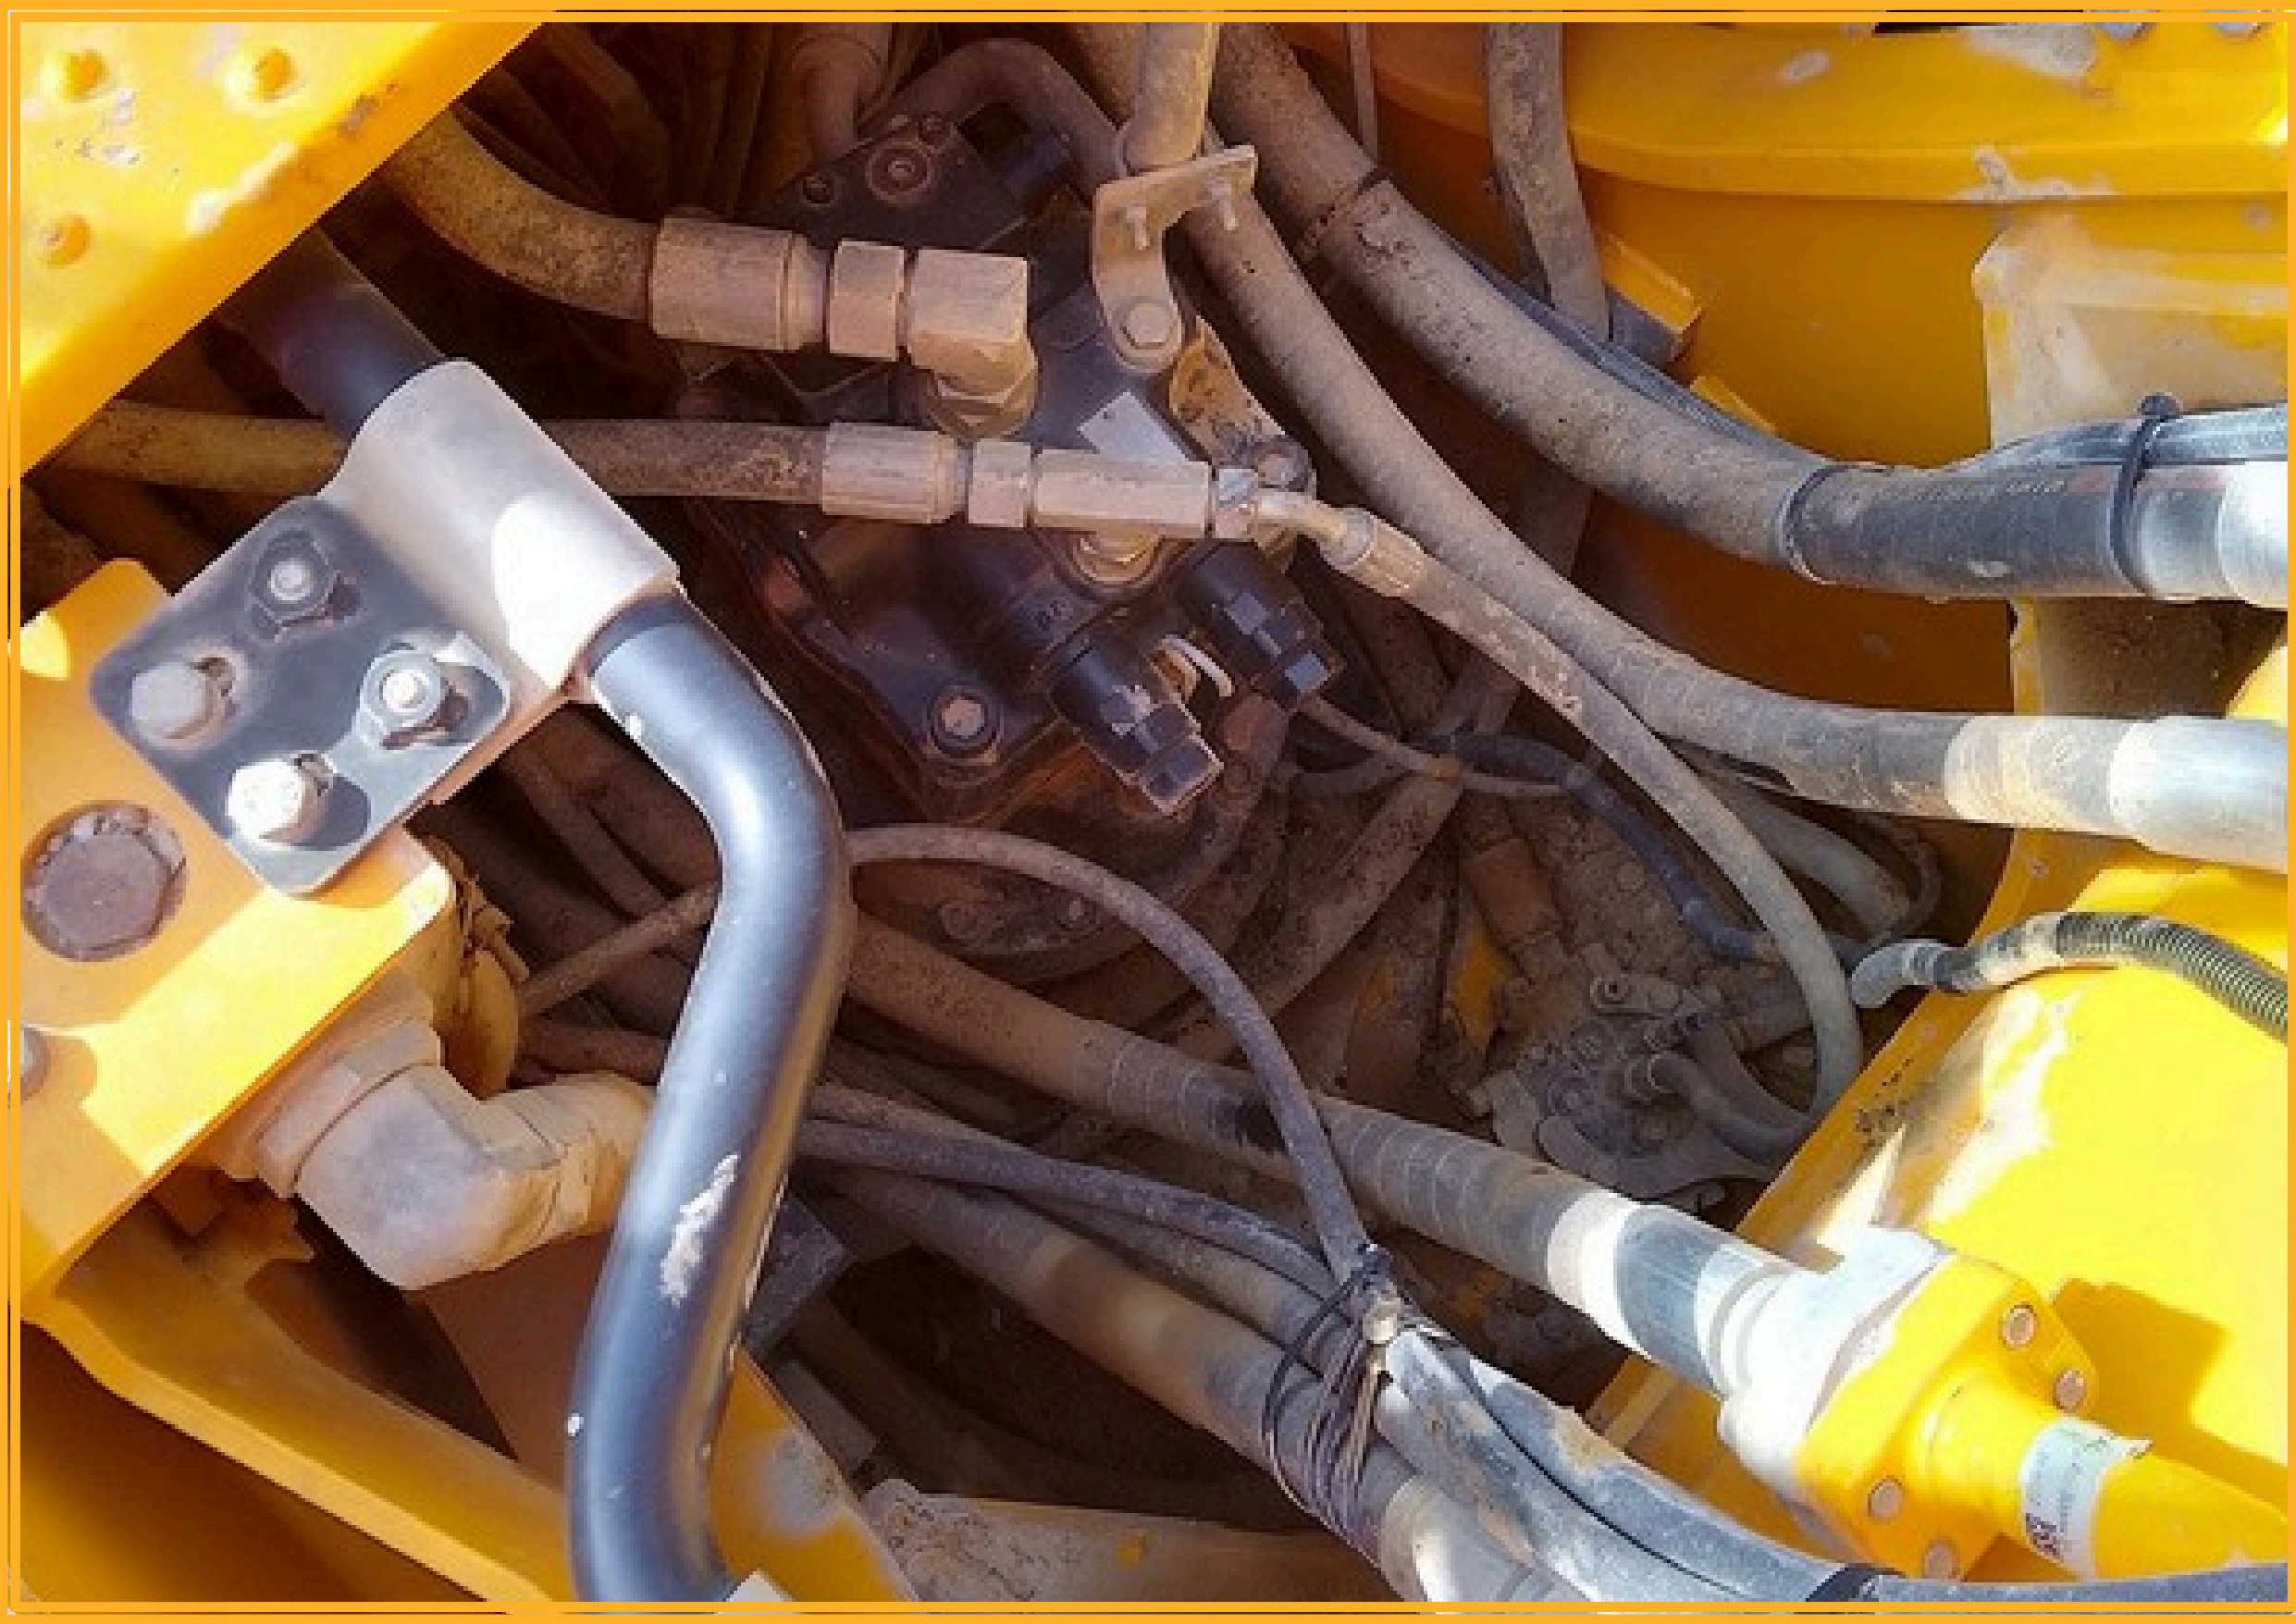


# USED TRACKED EXCAVATOR | JCB 220X LC

Our Ref: N/A    Serial No: 2874735



STATIC DIMENSIONS



| Model          |                                                |    | 210X LC, 220X LC |      | 220X SLC |      |       |
|----------------|------------------------------------------------|----|------------------|------|----------|------|-------|
| A              | Track length on ground                         | mm | 3660             |      | 3660     |      |       |
| B              | Undercarriage overall length                   | mm | 4460             |      | 4460     |      |       |
| C              | Track gauge                                    | mm | 2390             |      | 2170     |      |       |
| D              | Width over tracks (500mm trackshoes)           | mm | 2890             |      | 2670     |      |       |
| D              | Width over tracks (600mm trackshoes)           | mm | 2990             |      | 2770     |      |       |
| D              | Width over tracks (700mm trackshoes)           | mm | 3090             |      | 2870     |      |       |
| D              | Width over tracks (800mm trackshoes)           | mm | 3190             |      | 2970     |      |       |
| D              | Width over tracks (900mm trackshoes)           | mm | 3290             |      | -        |      |       |
| G              | Counterweight clearance                        | mm | 1077             |      | 1077     |      |       |
| H              | Tail length                                    | mm | 2813             |      | 2813     |      |       |
| I              | Overall width of superstructure                | mm | 2698             |      | 2698     |      |       |
| I              | Overall width of superstructure (with SIPS)    | mm | 2828             |      | 2828     |      |       |
| J              | Height over cab                                | mm | 3020             |      | 3020     |      |       |
| J              | Height over XD guard                           | mm | 3120             |      | 3120     |      |       |
| J              | Height over cab (vandal guard – optional)      | mm | 3330             |      | 3330     |      |       |
| K              | Ground clearance                               | mm | 485              |      | 485      |      |       |
| L              | Track height                                   | mm | 885              |      | 885      |      |       |
| M              | Tail swing radius                              | mm | 2846             |      | 2846     |      |       |
| N              | Overall height of upper structure              | mm | 3170             |      | 3170     |      |       |
|                |                                                |    | Mono             |      | T.A.B    |      | LR    |
| Dipper lengths |                                                |    | 2.4m             | 3.0m | 2.4m     | 3.0m | 6.4m  |
| E              | Transport length                               | mm | 9624             | 9562 | 9622     | 9409 | 12546 |
| F              | Transport height (handrail folded – optional)  | mm | 3200             | 3086 | 3266     | 3152 | 3079  |
|                | * Transport height (fixed handrail – standard) | mm | 3200             | 3170 | 3266     | 3170 | 3170  |

| ENGINE              |                                                                      |
|---------------------|----------------------------------------------------------------------|
| Model               | JCB 448 DIESELMAX Stage V                                            |
| Type                | 4 stroke, 4 cylinder in-line, direct injection, turbocharged diesel. |
| Rated power (net)   | 129 kW (173 hp).                                                     |
| Piston displacement | 4.8 litres.                                                          |
| Air filtration      | Dry element with in cab warning indicator.                           |
| Starting system     | 24 volt.                                                             |
| Batteries           | 2 x 12 volt.                                                         |
| Alternator          | 28 volt - 100 ampere.                                                |
| Maximum torque      | 690 Nm @ 1500 rpm.                                                   |
| Bore and stroke     | 106 x 135 mm.                                                        |

| SWING SYSTEM                          |                                                                          |
|---------------------------------------|--------------------------------------------------------------------------|
| Swing motor                           | Axial piston type.                                                       |
| Swing brake                           | Hydraulic braking plus automatic spring applied disc type parking brake. |
| Swing torque                          | 68.7 kNm.                                                                |
| Swing speed                           | 11.0 rpm.                                                                |
| Swing gear                            | Large diameter, internally toothed fully sealed grease bath lubricated.  |
| Swing lock                            | Switchable brake in cab.                                                 |
| *Excludes FOPS guard / XD FOPS guard. |                                                                          |