

2018 JCB 220X LC

6432 Hours




- T4F
- HAMMER LINES
- HBCV'S
- HYDRAULIC QUICK HITCH
- CAMERA
- COMFORT PACK
- SAFETY PACK
- 3M DIPPER
- 700M PLATES



USED TRACKED EXCAVATOR | JCB 220X LC

Our Ref: VSB0040503 Serial No: 2500346

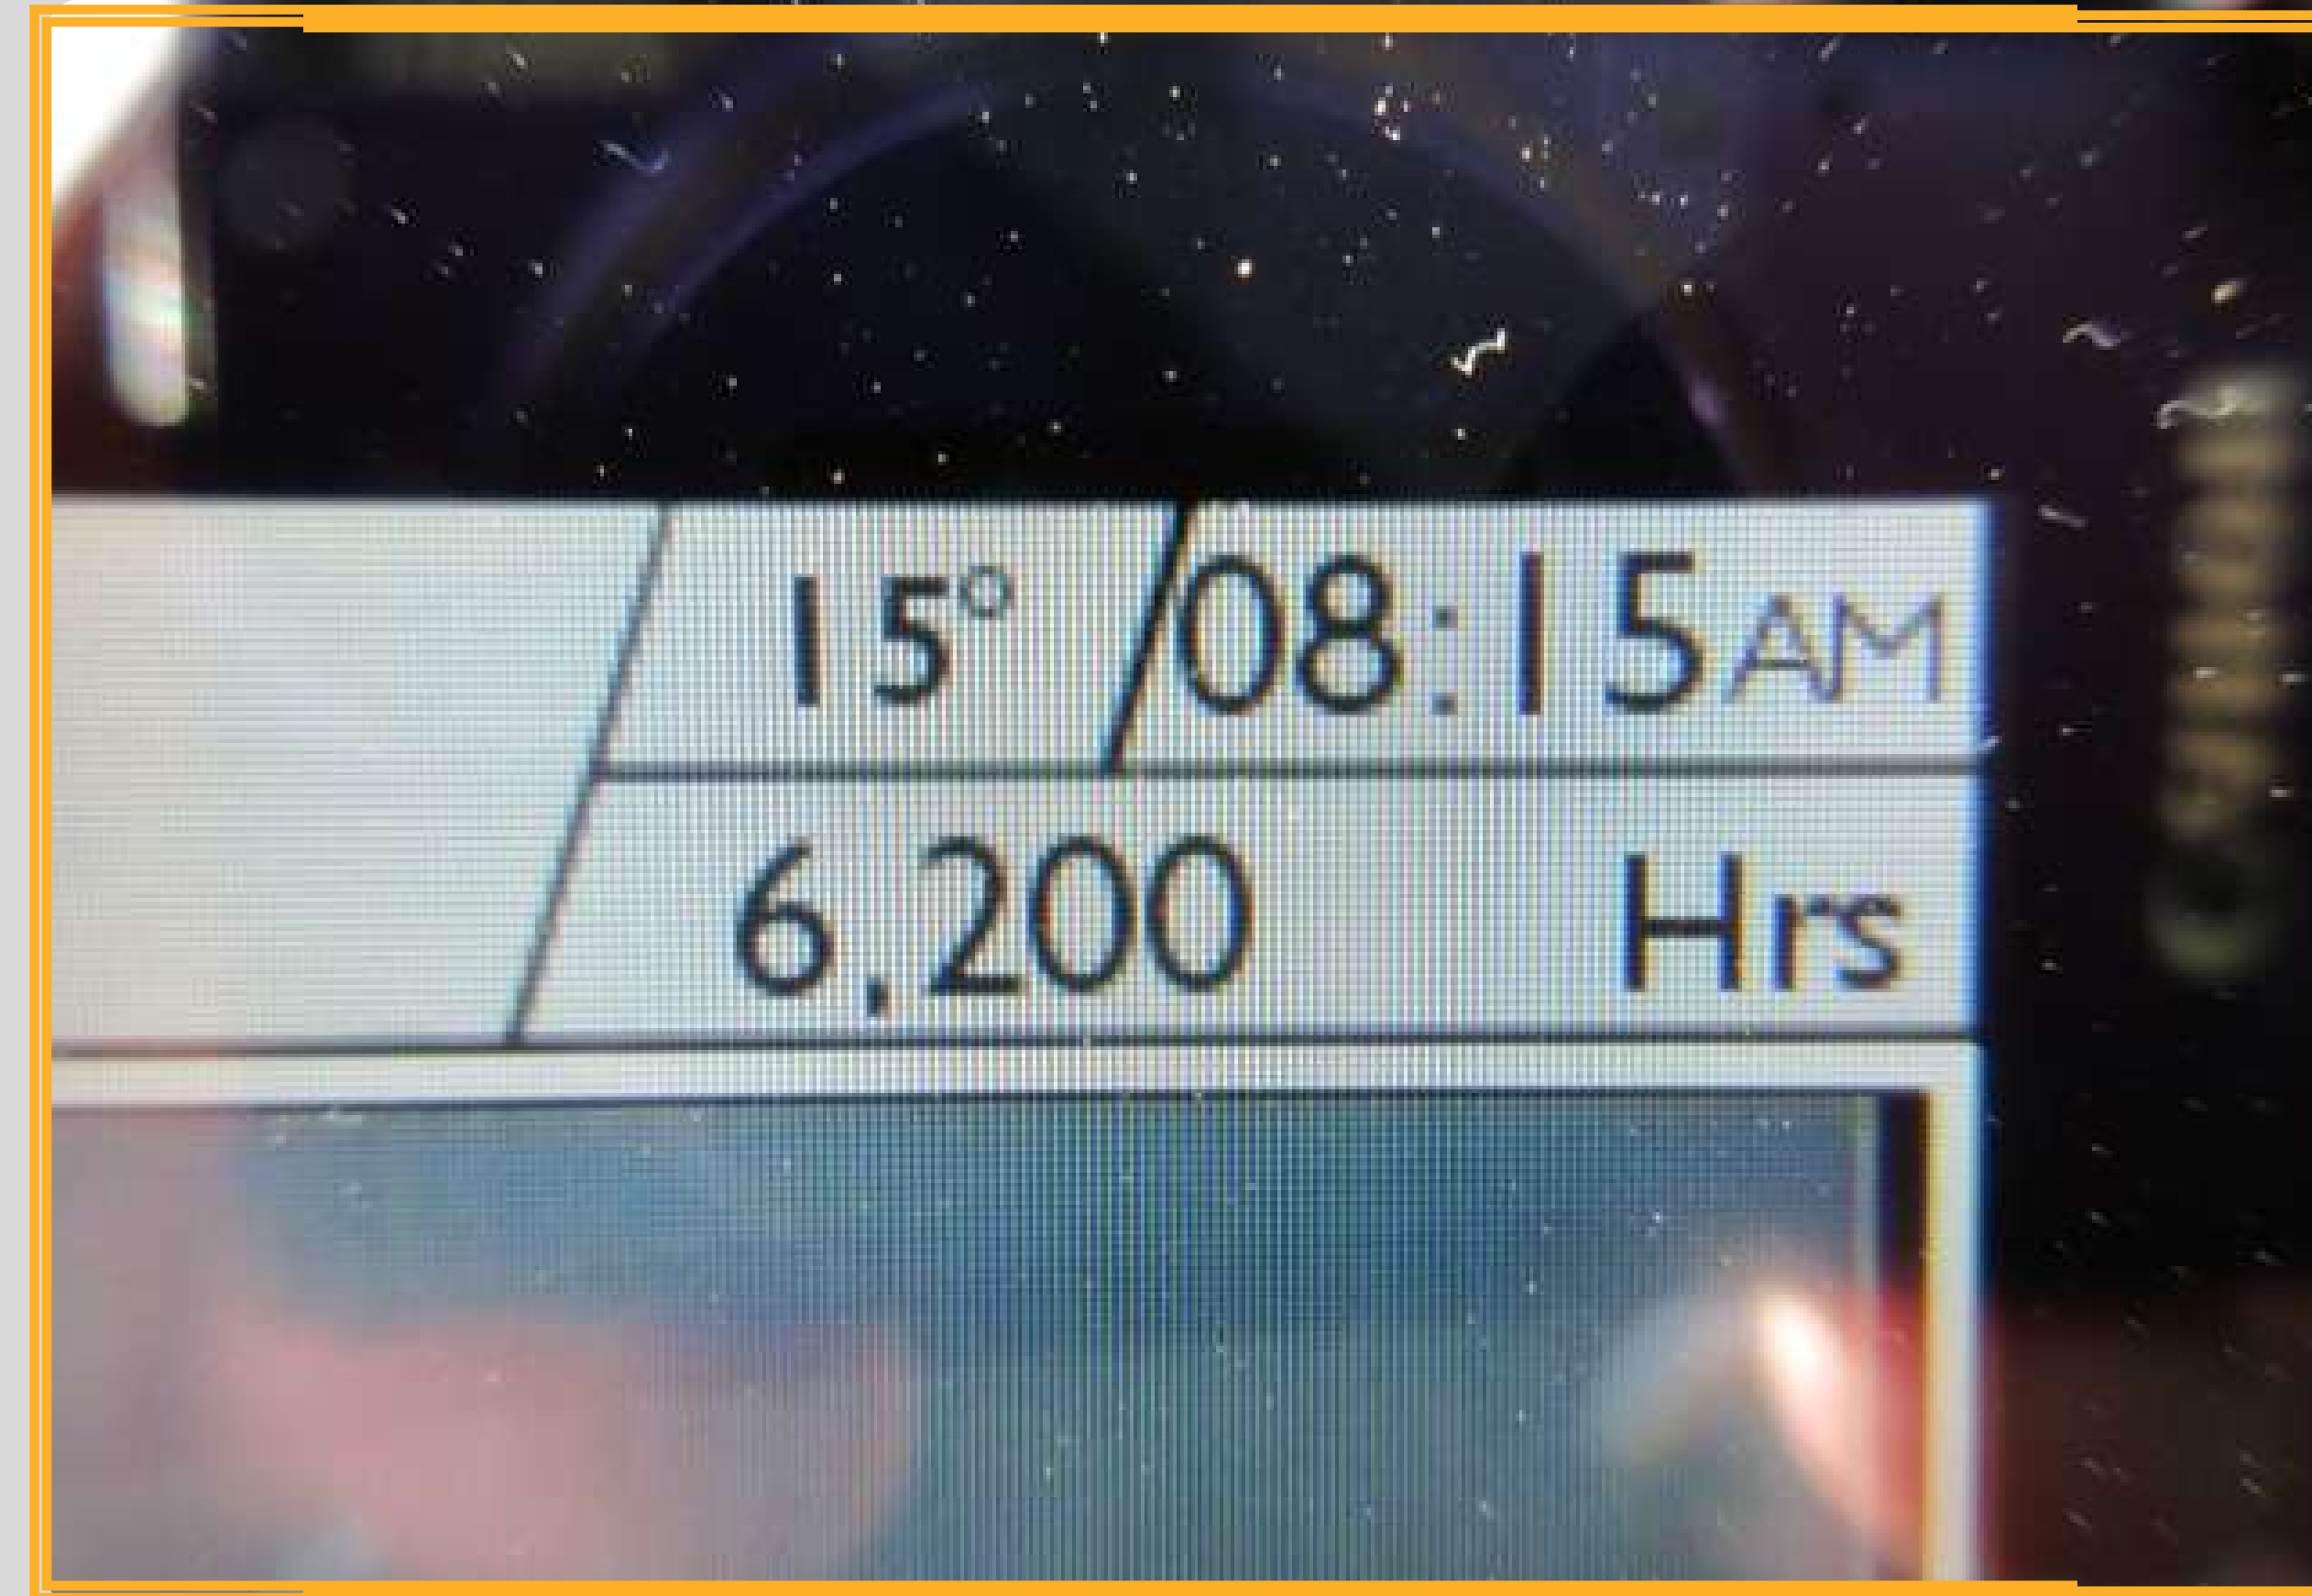

USED TRACKED EXCAVATOR | JCB 220X LC

Our Ref: VSB0040503 Serial No: 2500346



USED TRACKED EXCAVATOR | JCB 220X LC


Our Ref: VSB0040503 Serial No: 2500346



USED TRACKED EXCAVATOR | JCB 220X LC

Our Ref: VSB0040503 Serial No: 2500346

STATIC DIMENSIONS



Model			210X LC, 220X LC		220X SLC		
A	Track length on ground	mm	3660		3660		
B	Undercarriage overall length	mm	4460		4460		
C	Track gauge	mm	2390		2170		
D	Width over tracks (500mm trackshoes)	mm	2890		2670		
D	Width over tracks (600mm trackshoes)	mm	2990		2770		
D	Width over tracks (700mm trackshoes)	mm	3090		2870		
D	Width over tracks (800mm trackshoes)	mm	3190		2970		
D	Width over tracks (900mm trackshoes)	mm	3290		-		
G	Counterweight clearance	mm	1077		1077		
H	Tail length	mm	2813		2813		
I	Overall width of superstructure	mm	2698		2698		
I	Overall width of superstructure (with SIPS)	mm	2828		2828		
J	Height over cab	mm	3020		3020		
J	Height over XD guard	mm	3120		3120		
J	Height over cab (vandal guard – optional)	mm	3330		3330		
K	Ground clearance	mm	485		485		
L	Track height	mm	885		885		
M	Tail swing radius	mm	2846		2846		
N	Overall height of upper structure	mm	3170		3170		
			Mono		T.A.B		LR
Dipper lengths			2.4m	3.0m	2.4m	3.0m	6.4m
E	Transport length	mm	9624	9562	9622	9409	12546
F	Transport height (handrail folded – optional)	mm	3200	3086	3266	3152	3079
	* Transport height (fixed handrail – standard)	mm	3200	3170	3266	3170	3170

ENGINE	
Model	JCB 448 DIESELMAX Stage V
Type	4 stroke, 4 cylinder in-line, direct injection, turbocharged diesel.
Rated power (net)	129 kW (173 hp).
Piston displacement	4.8 litres.
Air filtration	Dry element with in cab warning indicator.
Starting system	24 volt.
Batteries	2 x 12 volt.
Alternator	28 volt - 100 ampere.
Maximum torque	690 Nm @ 1500 rpm.
Bore and stroke	106 x 135 mm.

SWING SYSTEM	
Swing motor	Axial piston type.
Swing brake	Hydraulic braking plus automatic spring applied disc type parking brake.
Swing torque	68.7 kNm.
Swing speed	11.0 rpm.
Swing gear	Large diameter, internally toothed fully sealed grease bath lubricated.
Swing lock	Switchable brake in cab.
*Excludes FOPS guard / XD FOPS guard.	