

## Description

The MK2 Pop Up Power Dock is a superb addition to both home and office environments, available in three variants to suit your requirements:

**MK2 Standard:** Fitted with two standard SA 3-pin and 1 Round 2-pin power sockets for reliable everyday use.

**MK2 CC:** Fitted with one standard SA 3 pin power socket, one Round 2-pin, one New ZA 3-pin and two Type-C charging ports for fast and efficient charging of mobile devices.

**MK2 CC Wireless:** Fitted with one standard SA 3-pin power socket, one Round 2-pin, one New ZA 3-pin and two Type-C charging ports for fast and efficient charging of mobile devices and a 15W Wireless charger for cable-free charging of compatible devices.

All variants are equipped with a smooth gas strut mechanism, allowing the Power Dock to rise effortlessly from a flush-mounted position when needed. When not in use, it retracts, blending seamlessly with your desk or work surface to maintain a clean and organized space.

With over 40 years of experience, PowerLogic is dedicated to quality, safety, and convenience. The PDO MK2 reflects this commitment, ensuring a blend of elegance and functionality for any workspace.

## Features

- 2 x 16A SA 3-pin socket outlets with optional 3.15A individual fusing
- 1x Round 2-pin
- Optional USB interfaces (45W/85W options are available)
- Optional 15W Wireless charging built into the lid
- Optional 15A Resettable Overload Protection Switch
- Powerful gas strut for automatic raising of the unit
- Easy Installation through a 95mm/3 3/4in diameter hole with a secure locking ring
- 2m cable with a SA plug
- High quality aluminium construction
- Available interface colors: White, Black and Grey
- Height adjustment thumbscrew to ensure flush mounting
- LED power light on standard versions

## Electrical Specifications

- Voltage: 230VAC 50 Hz
- Current: 16A (Max.)
- Power: 3000W
- 15W/10W/7.5W/5W Wireless output capabilities
- 2 x 16A SA 3-pin socket outlets
- USB-C+C:
  - 45W: C1/C2: 5V3A-20V2.25A(45W MAX);  
C1+C2=45W Max
  - 85W: C1/C2: 5V3A-20V4.25A(85W Max);  
C1+C2=80W Max


## Applications

- Office
- Home
- Kitchen
- Retail

### Front view



### Top view

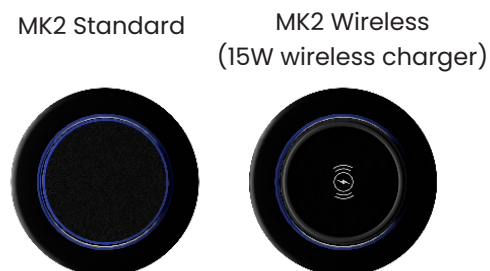

## Dimensions

- Installable length - 440mm
- Above the surface length - 200mm
- Above surface diameter - 75mm
- Cut-out size 95mm

## Approximate Weight

- Unit - 1.78kg/ 3.9lbs

**All our products carry a 24-month warranty.  
Extended warranties are available by request**