

powerlogic
SA (Pty) Ltd
innovative power technologies

POWER DOCK

Gemini.

Gemini, Gemini CC & Gemini CC WC



MODERN

FUNCTIONAL

ELEGANT

POWER DOCK

Gemini.

FRONT VIEW

BACK VIEW



**All our products carry a 24-month warranty.
Extended warranties are available by request.**

Description

A powerful, elegant Power Dock that is characterized by its smooth gas strut operation and its unique configuration having power outlets on both sides of the unit. More outlets, more capabilities. With a simple press of the top of the Power Dock, the sockets reveal themselves as the unit raises itself up automatically. The unit can be pushed down and lowered back into place, hidden and out of the way, keeping your surface clutter free. The Gemini CC WC model also has a 15W wireless charger built into the top cap, so you can keep your mobile devices powered up and your work space clean and functional.

Gemini: Fitted with four standard UK power sockets for reliable everyday use.

Gemini CC: Fitted with four standard UK power sockets, and two Type-C charging ports for fast and efficient charging of mobile devices.

Features

- 4 x SA 3-pin socket outlets (2 per side)
- 2 x Round 2-pin (1 per side)
- Optional USB interfaces (45W/85W options are available)
- Optional 15W Wireless charger built into the top-cap
- Optional 15A Resettable Overload Protection Switch
- Powerful gas strut for automatic raising of the unit
- Easy Installation through a 95mm/3 3/4in diameter hole with a robust locking ring
- 2m cable with a SA 3-pin plug
- High quality aluminium construction
- Available interface colors: White, Black and Grey
- Height adjustment thumbscrew to ensure flush mounting
- LED power light on all standard options

Electrical Specifications

- Voltage: 230VAC 50 Hz
- Current: 16A (Max.)
- Power: 3000W
- 15W/10W/7.5W/5W Wireless output capabilities
- 4 x 16A SA 3-pin socket outlets with optional individual fuses
- USB-C+C:
 - 45W: C1/C2: 5V3A-20V2.25A(45W MAX);
C1+C2=45W Max
 - 85W: C1/C2: 5V3A-20V4.25A(85W Max);
C1+C2=80W Max

Dimensions


- Installable length - 440mm
- Length above the surface when open - 200mm
- Above surface diameter of raised section - 75mm
- Cut-out size 95mm

Approximate Weight


- Unit - 1.78kg/ 3.9lbs

TOP VIEW


GEMINI
STANDARD




GEMINI
(WITH WIRELESS CHARGER IN
THE TOP CAP)



FRONT VIEW

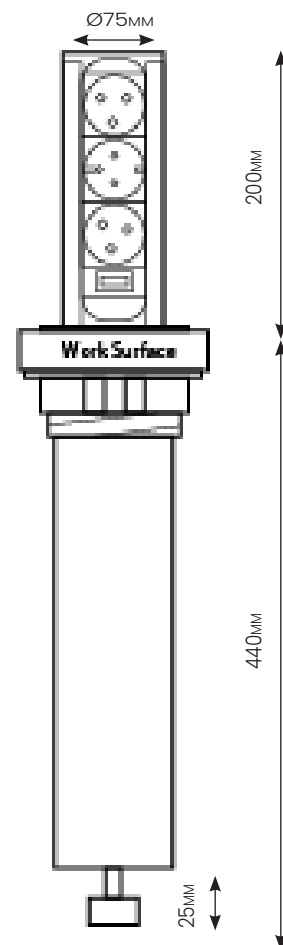

BACK VIEW

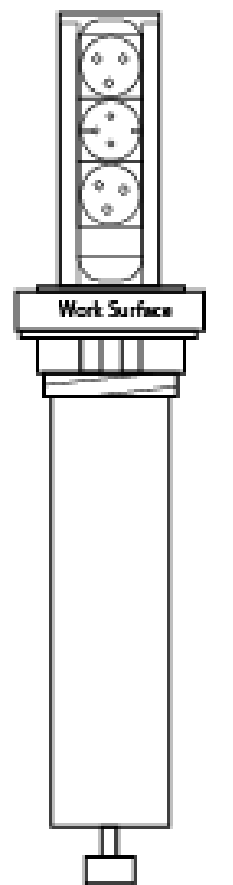

POWER DOCK

Gemini

GEMINI CC WC



Contact Us

powerlogic.net

info@powerlogic.co.za

(+27) 21 704 1450