

One-Touch

Boardroom Power Unit

Power Solutions



ONE TOUCH

LED sensor
activation


CUSTOMISABLE POWER

Tailor to your power
and data needs

MOTORISED ROTATION

Precision German-
engineered drive

One-Touch Boardroom Power Unit

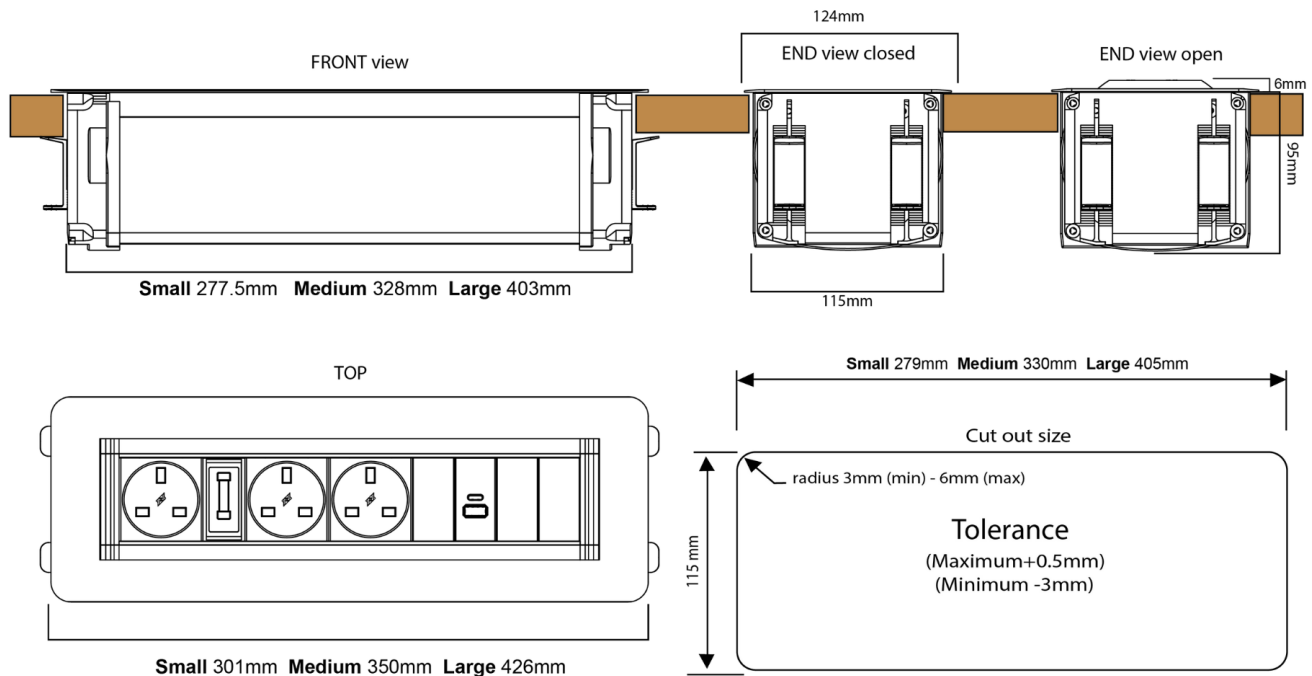

Technical dimension sketch (front / end / top / cut-out)

All our products carry a 12-month warranty. Extended warranties are available by request

Description

The One-Touch is an electronically operated boardroom power solution designed for effortless connectivity. Activated by integrated LED touch sensors, a precision stepper motor rotates the unit smoothly and quietly, revealing the power outlets.

When in use, the interface rises above the surface to reduce the risk of spill ingress. When closed, the unit sits almost flush with the work surface, maintaining clean lines and a refined aesthetic.

Available in a variety of finishes and configurations, the One-Touch transforms boardroom tables into intelligent, state-of-the-art meeting environments.

Power Configuration

The One-Touch offers fully configurable power and data layouts to suit boardroom and meeting environments. Configuration options include standard AC outlets, USB smart charging modules, and a wide range of integrated data interfaces such as HDMI, VGA, RCA, USB Data, Cat6 and Audio/Mic modules. Optional switches, including a 15A thermal overload switch as well as standard red or green switches, can be incorporated into the layout. Standard and add-on module options allow the unit length and functionality to be expanded according to requirements.

Technical Specifications

Voltage	110V – 250V AC @ 50Hz – 60Hz
Current	15A (20A with upgraded wiring)
Power	1800W @ 110V – 125V AC 3000W @ 220V – 250V AC

Applications

- Executive boardrooms
- Meeting areas
- Conference facilities
- Training rooms
- Corporate offices
- Co-working areas

Mounting Options

Designed for recessed installation using a four-point ratchet clip mounting system for secure and simplified installation. When closed, the unit sits almost flush with the work surface to minimise obstruction.

Colours



Features

- LED touch-sensor activation
- Precision stepper motor for ultra quiet operation
- Raised interface to reduce spill ingress
- Automatic obstruction detection with reverse function
- Shuttered power outlets
- Overload protection
- Simple ratchet mounting system for easy installation
- multiple finishes
- Select from 24 international socket type.
- Integrated cable support hanger
- Wide range of colour and finish options

Dimensions

Standard Unit Length (Top View)

Small: 301mm
Medium: 350mm
Large: 426mm

Standard Cut-Out Length

Small: 277.5mm
Medium: 328mm
Large: 403mm

Cut-Out Width: 115mm

Visible Opening Width: 113mm

Add-On Module Length (Extended Version)

Small: 400mm
Medium: 421mm
Large: 500mm

Add-On Cut-Out Length

Small: 364.5mm
Medium: 390mm
Large: 465mm

Approximate Weight

- Depends on configuration

One-Touch Boardroom Power Unit



MODERN

FUNCTIONAL

ELEGANT

Contact Us

powerlogic.net

info@powerlogic.co.za

(+27) 21 704 1450